




PRESCO

PAC Controllers

The PAC1 (1 door) and PAC2 (2 door) controllers ensure secure door access due to the split of controller from keypad or reader. The units are easy to program on-site via keypad, or via a PC with a PEL1 or PIM.

- ▶ Non-volatile memory with 10 year data memory retention
- ▶ Supports bulk entry programming of users
- ▶ Automatic door re-lock function
- ▶ Support for fail safe and fail secure locking
- ▶ 12-24 Volt D.C. or 16-24 Volt A.C. operation, heavy duty 5 Amp relay contacts for lock control, 1 Amp N.O. relay contacts for DOTL and door forced outputs
- ▶ Programmable EGRESS input: Momentary release for door output, Hold release for door output

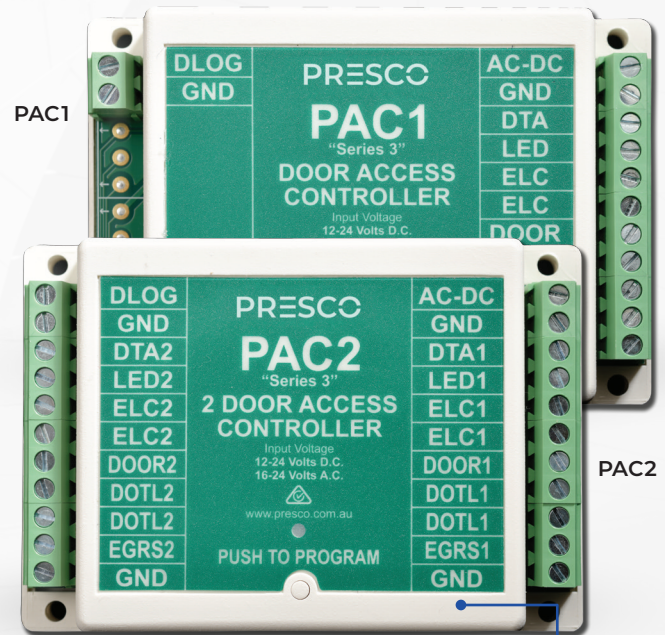

104mm x 72mm x 27mm
 200 mA. D.C. max 240 mA. A.C. max
 11 - 30 Volts D.C. 14 - 28 Volts A.C.
 ELC Contacts: 30 Volts, 5 Amp A.C./D.C.,
 Single Pole Single Throw, N.O. or N.C.
 DOTL Contacts: 30 Volts, 1 Amp, Single Pole
 Single Throw, N.O.



1 or 2 door control - PAC1 or PAC2 respectively



600 or 800 users - PAC1 or PAC2 respectively



Simple installation and use



Compatible with Prove products



Each unit factory tested with 5 year warranty included



Australian design, manufacture and support