

English

1 Appearance

1. Indicator

- Slowly flashing light green: Waiting for enrollment
- Green and orange flashing alternately: Enrolling
- Solid green: Enrolled
- Solid orange: Enrolling failed/Fault (Disconnected)
- Quickly flashing orange: Alarm
- Slowly flashing green: Find me mode

2. Tamper Button 3. Wiring Terminal 4. DIP Switch

2 Installation

3 Wiring

4 Address Settings


Configure the address via DIP switch of the receiver before powering on the system. The address should be in the range (0 to 63). The address of each receiver should be unique.

The binary value shown in the diagram is 000011, which means the decimal value is 3, so the address of the module is 3.


Specification

Bus	1 Speed-X bus
Power supply	9 to 28 VDC, 1 A
Power consumption	Maximum current 100 mA@12 VDC; Quiescent current 80 mA@12 VDC
RF frequency	433 MHz
Wireless security	Frequency Hopping 128 AES Encryption
LED Indicator	Green: Power/Find me Orange: Alarm/Fault
Dimension(W × H × D)	110 mm × 155 mm × 32 mm
Shell material	Plastic
Weight	231.5 g
Operation temperature	-10 °C to 40 °C
Operation humidity	10% to 90%
Alarm input	Up to 8 wireless PIRCAM


1




2

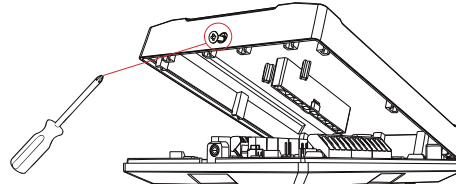

3

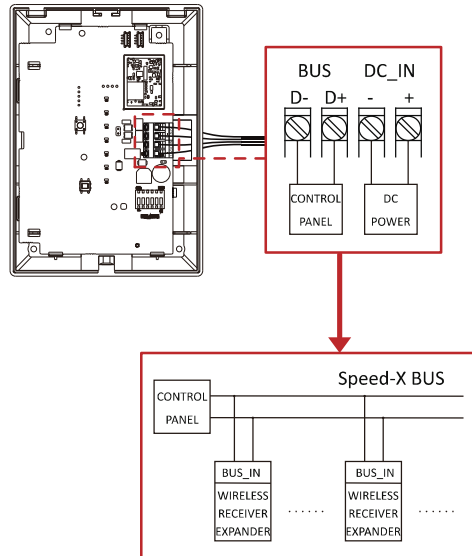

4

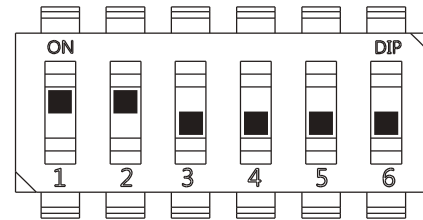

Lowbit ← Highbit
BIN=000011 → Address=3

BIN	Address	BIN	Address
000000	0	111000	56
000001	1	111001	57
000010	2	111010	58
000011	3	111011	59
000100	4	111100	60
000101	5	111101	61
000110	6	111110	62
000111	7	111111	63

1	Indicator
2	Tamper Button
3	Wiring Terminal
4	DIP Switch

©2022 Hangzhou Hikvision Digital Technology Co., Ltd. All rights reserved.
About this Manual
The Manual includes instructions for using and managing the Product. Pictures, charts, logos and all other information herein are for description and explanation only. The information contained in the Manual is subject to change without notice, due to firmware updates or other reasons. Please find the latest version of this Manual at the Hikvision website (<https://www.hikvision.com/>).
Please use this Manual with the guidance and assistance of professionals trained in supporting the Product.
HIKVISION and other Hikvision trademarks and logos are the properties of Hikvision in various jurisdictions. Other trademarks and logos mentioned are the properties of their respective owners.
TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THIS MANUAL AND THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND BATTERY, ARE PROVIDED "AS IS" AND "WITH ALL FAULTS AND ERRORS". HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTION, QUALITY, OR FITNESS FOR A PARTICULAR PURPOSE. THE USE OF THE PRODUCT BY YOU IS AT YOUR OWN RISK. IN NO EVENT WILL HIKVISION BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA, CORRUPTION OF SYSTEMS, OR LOSS OF DOCUMENTATION, WHETHER BASED ON BREACH OF CONTRACT, TORT INCLUDING NEGLIGENCE, PRODUCT LIABILITY, OR OTHERWISE, IN CONNECTION WITH THE USE OF THE PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSS.
YOU ACKNOWLEDGE THAT THE NATURE OF THE INTERNET PROVIDES FOR INHERENT SECURITY RISKS, AND HIKVISION SHALL NOT TAKE ANY RESPONSIBILITY FOR AND/OR ALLEGED, PROVEN, OR SUSPECTED, OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INFECTION, OR OTHER INTERNET SECURITY RISKS. HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUESTED. YOU AGREE TO USE THIS PRODUCT IN COMPLIANCE WITH ALL APPLICABLE LAWS, AND YOU ARE SOLELY RESPONSIBLE FOR ENSURING THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. ESPECIALLY, YOU ARE RESPONSIBLE FOR USING THIS PRODUCT IN A MANNER THAT DOES NOT INFRINGE ON THE RIGHTS OF THIRD PARTIES, INCLUDING WITHOUT LIMITATION, RIGHTS OF PUBLICITY, INTELLECTUAL PROPERTY RIGHTS, OR DATA PROTECTION AND OTHER PRIVACY RIGHTS. YOU SHALL NOT USE THIS PRODUCT FOR ANY PROHIBITED END-USES, INCLUDING THE DEVELOPMENT OR PRODUCTION OF WEAPONS OF MASS DESTRUCTION, THE DEVELOPMENT OR PRODUCTION OF CHEMICAL OR BIOLOGICAL WEAPONS, ANY ACTIVITIES IN THE CONTEXT RELATED TO ANY NUCLEAR EXPLOSION OR UNGUARD NUCLEAR FUEL-CYCLE, OR IN SUPPORT OF HUMAN RIGHTS ABUSES.
This product and, if applicable, the supplied accessories too are marked with "CE" and comply therewith with the applicable harmonized European standards listed under the Directive 2014/53/EU (RED), Directive 2014/30/EU (EMC), Directive 2014/35/EU (LVD), Directive 2011/65/EU (RoHS),
2012/18/EU (WEEE directive). Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see www.recycle.info.
2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with the symbol, which may include letters to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see www.recycle.info.

ELECTRIC CAUTION
⚠ In the use of the product, you must be in strict compliance with the electrical safety regulations of the nation and region.
⚠ Shock hazard! Disconnect all power sources before maintenance.
⚠ The socket-outlet shall be installed near the equipment and shall be easily accessible.
⚠ Ensure correct wiring of the terminals for connection to an AC mains supply.
⚠ The equipment has been designed, when required, modified for connection to an IT power distribution system.

BATTERY CAUTION
⚠ This equipment is not suitable for use in locations where children are likely to be present.
⚠ CAUTION: Risk of explosion if the battery is replaced by an incorrect type.
⚠ Improper replacement of the battery with an incorrect type may defeat a safeguard (for example, in the case of some lithium battery types).
⚠ Do not dispose of the battery into fire or a hot oven, or mechanically crush or cut the battery, which may result in an explosion.
⚠ Do not leave the battery in an extremely high temperature surrounding environment, which may result in an explosion or the leakage of flammable liquid or gas.
⚠ Do not subject the battery to extremely low air pressure, which may result in an explosion or the leakage of flammable liquid or gas.
⚠ Dispose of used batteries according to the instructions.
⚠ Risk of explosion if the battery is replaced by an incorrect type.
⚠ Improper replacement of the battery with an incorrect type may defeat a safeguard (for example, in the case of some lithium battery types).
⚠ Do not dispose of the battery into fire or a hot oven, or mechanically crush or cut the battery, which may result in an explosion.
⚠ Do not leave the battery in an extremely high temperature surrounding environment, which may result in an explosion or the leakage of flammable liquid or gas.
⚠ Do not subject the battery to extremely low air pressure, which may result in an explosion or the leakage of flammable liquid or gas.
⚠ Dispose of used batteries according to the instructions.

⚠ identifies the positive terminal(s) of equipment which is used with, or generates direct current. ⚠ identifies the negative terminal(s) of equipment which is used with, or generates direct current.

FIRE CAUTION
⚠ This equipment is suitable for mounting on concrete or other non-combustible surface only.
⚠ The serial port of the equipment is used for debugging only.

INSTALLATION CAUTION
⚠ This equipment is not suitable for use in locations where children are likely to be present.
⚠ Keep the equipment vertically down when moving or using it.
⚠ Install the equipment according to the instructions in this manual.
⚠ To prevent injury, this equipment must be securely attached to the floor/wall in accordance with the installation instructions.

FCC Information
Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC compliance: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- This equipment should be installed and operated with a minimum distance 20cm between the radiator and your body.
- FCC Conditions
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.