




Quick Installation Guide

Long-rang Outdoor Wireless Transmitter

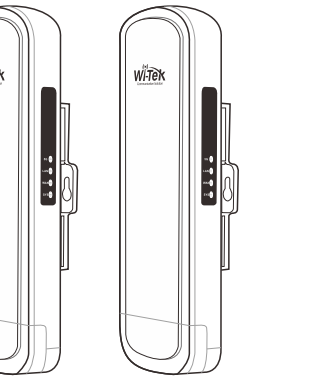

WI-CPE513P-KIT Hardware Version: V3

www.wireless-tek.com

1.Packing Content

- WI-CPE513P-KIT




Wireless Transmitter x 2



PoE Adapter x 2



Metal Tie Cable x 2




Ethernet Cable x 2



Quick Installation Guide x 1

2.Hardware Overview

- WI-CPE513P-KIT

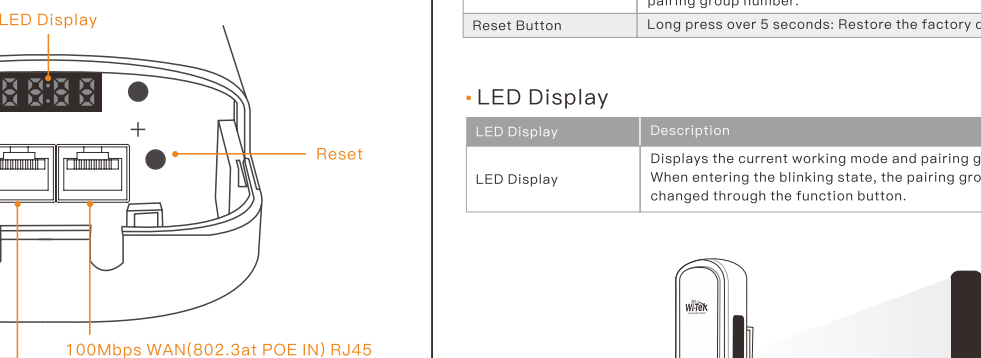

- DIP Switch


DIP Switch	Description
DIP Switch	H: Base station mode, supports wireless point-to-point and point-to-multipoint long-distance transmission. C: CPE mode, a receiving point for connecting a wireless base station.

- Button

Button	Description
Function Button	+/-: Press and hold the button for 3s to enable the pairing group adjustment function. When the LED Display starts to blink, press the button to raise the pairing group number. -/: When the LED Display starts to blink, press the button to reduce the pairing group number.
Reset Button	Long press over 5 seconds: Restore the factory default configuration.

- LED Display


LED Display	Description
LED Display	Displays the current working mode and pairing group number. When entering the blinking state, the pairing group number can be changed through the function button.




- LED Indicator

LED Indicator	Status	Description
5G	Solid On	Pairing successfully.
	Off	Pairing failed.
WAN & LAN	Solid On	A link has been established on the interface.
	Off	No link is established on the interface.
SYS	Solid On	The system is working normally.
	Off	The system is not working.


3.Mounting



1. Insert ribbon at the backside bracket hole. Adjust it according to the pole size and installation position.



2. Install the device on the pole and tighten the ribbon.




3. Hold on the buckle to take down the device back cover. Insert the net cable into the network port, then fasten the back cover.

4.Network Application

- Configuration steps

1. Set one device to Base Station mode, and Another to CPE mode.



2. Set same pairing group number: Long press on "+" button in 3S, the LED Display is flashing, and then adjust the number by "+" or "-".

