

Reza


LED DOWNLIGHT

10W

3CCT SELECTABLE

IC-4

PRODUCT OVERVIEW

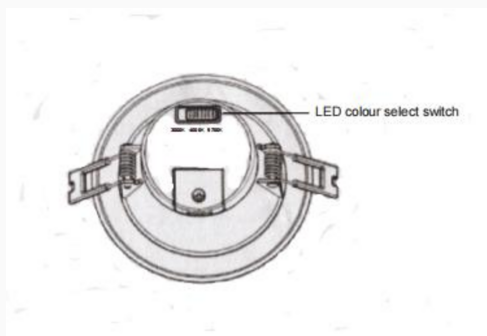


Rear-mounted selector: 3000K / 4000K / 6000K



PRODUCT SPECIFICATIONS

Product	Reza LED Downlight
Model No.	5504018
Input voltage	240V AC
Power	10W
Dimmable	Yes
Colour temperature	3CCT selectable: 3000K / 4000K / 6000K
Beam angle	60 degrees
Cut Out	90mm diameter
Dimensions	103mm (D) x 88mm (H)
IP rating	IP44 - exposed face when correctly installed
Insulation rating	IC-4 - insulation may abut and cover
Finish	White
Rated life	30,000 hours or greater
Supply lead	0.6m cable with plug

INCLUDED IN THIS KIT

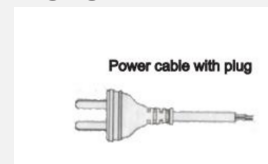

One 10W SMD LED downlight with integrated colour selector, spring clips and 0.6m power lead with plug.

Select the desired colour temperature only while the power is switched off.

INSTALLATION INSTRUCTIONS




Installation must be carried out by a licensed electrician with power isolated at the switchboard.

1 ISOLATE THE POWER

Switch off and isolate the circuit at the switchboard. Confirm that the supply is de-energised before starting work.


2 PREPARE THE OPENING

Confirm the installation position and sufficient ceiling-space clearance. Cut a clean 90mm diameter opening.



3 SELECT THE CCT

With power off, set the rear selector to 3000K, 4000K or 6000K before the fitting is connected.



4 CONNECT THE SUPPLY

Connect the downlight plug to a suitable mains socket outlet located in the ceiling space.




5 FIT THE DOWNLIGHT

Raise both spring clips, insert the fitting through the opening and release it slowly so the clips secure it to the ceiling.



6 RESTORE POWER

Check that the fitting is seated evenly and no cable is trapped. Restore power and test correct operation.



IC-4 INSULATION MAY ABUT & COVER

This recessed luminaire is classified IC-4 in accordance with the applicable recessed-luminaire safety requirements. Building insulation may abut and cover the luminaire.

Do not cover the supply plug, socket outlet or any separate equipment unless that component is also approved for covering.

IMPORTANT SAFETY

- Install in accordance with AS/NZS 3000 and all applicable local requirements.
- Do not change the colour-temperature setting while the fitting is energised.
- Do not install a damaged fitting, supply lead or plug.
- IP44 applies to the exposed face when the downlight is correctly installed.
- Keep the socket outlet and supply connection accessible for inspection and service.
- This product contains no user-serviceable parts. Replace the complete fitting if it fails.



Do not dispose of electrical products with household waste. Recycle through an appropriate local collection facility.

