

Catalogue number: **TS400/630/800 Range**


Thermal Magnetic and Electronic MCCB: 2,3,4 Pole 160A ~ 800A



Thermal Magnetic And Electronic MCCB Range

- Higher short circuit breaking capacity
- Fixed Dimensions
- Available in 2,3 or 4 Pole Range
- Optional Auxiliaries Available
- Shunt/Undervoltage release auxiliaries available.
- Auxiliary/Alarm/Fault Alarm auxiliary Switches available.


Generic photo only (actual product may change depending on configuration)

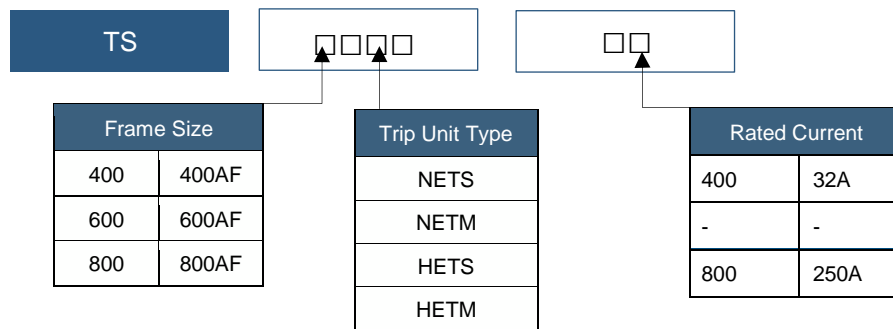


Trip Unit Types

| MCCB Trip Unit Type | |
|---------------------|---|
| NETS | Normal Electronic Trip unit's standard |
| NETM | Normal Electronic Trip unit's multifunction |
| HETS | High Electronic Trip unit's standard |
| HETM | High Electronic Trip units' multifunction |

***High, Normal* signifies the value of the short-circuit breaking capacity (Icu: kA rating)
 High- high short circuit breaking capacity.
 Normal- normal short circuit breaking capacity.

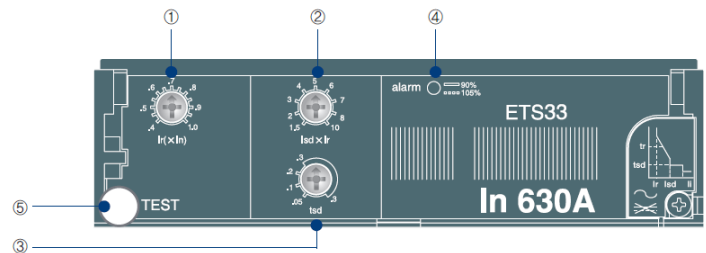

- 1 Adjustable rated current setting (Ir)
- 2 Adjustable short time delay current setting (Isd)
- 3 Adjustable time delay setting (tsd)
- 4 Alarm LED 90% Ir: ON, 105% Ir or more: ON-OFF
- 5 Test connector

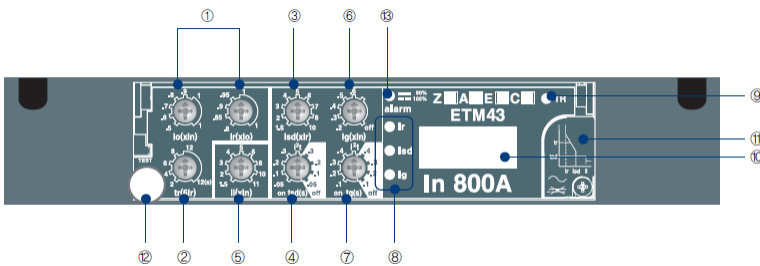

- 1 Adjustable rated current setting (Ir)
- 2 Adjustable long time setting (tr)
- 3 Adjustable short time current setting (Isd)
- 4 Adjustable time delay setting (tsd)
- 5 Adjustable instantaneous current setting (Ii)
- 6 Adjustable earth fault current setting (Ig)
- 7 Adjustable earth fault delay setting (tg)
- 8 Indication LED
- 9 TR (trip reason) button
- 10 Display LCD (Ammeter)
- 11 Auxiliary power
- 12 Test connector
- 13 Alarm LED



| Specifications | | | MCCB Type | | | | | |
|---|----|----------------------|------------|------|------------|------|------------|------|
| | | | TS400 | | TS630 | | TS800 | |
| Frame Size | AF | | 400 | | 630 | | 800 | |
| Rated Current | A | | 300, 400 | | 500, 630 | | 700, 800 | |
| No. of poles | | | 2,3,4 | | 2,3,4 | | 2,3,4 | |
| Rated operational voltage, Ue | AC | V | 690 | | 690 | | 690 | |
| | DC | V | 500 | | 500 | | 500 | |
| Rated impulse withstand voltage, Uimp | | kV | 8 | | 8 | | 8 | |
| Rated Insulation Voltage. Ui | | A | 1000 | | 1000 | | 1000 | |
| Rated Ultimate short-circuit breaking capacity, Icu | AC | 220/240V [kA] | N | H | N | H | N | H |
| | | 380/415V [kA] | 100 | 120 | 100 | 120 | 100 | 120 |
| | | 440/460V [kA] | 65 | 85 | 65 | 85 | 65 | 100 |
| | | 480/500V [kA] | 65 | 85 | 65 | 85 | 65 | 100 |
| | | 525V [kA] | 42 | 65 | 42 | 65 | 42 | 85 |
| | | 660/690V [kA] | 22 | 35 | 22 | 35 | 22 | 35 |
| | DC | 250V [kA] | 10 | 20 | 10 | 20 | 10 | 20 |
| | | 500V(2P series) [kA] | 50 | 85 | 50 | 85 | 50 | 85 |
| Rated service breaking Capacity Ics | AC | 220/240V [%Icu] | 100% | 100% | 100% | 100% | 100% | 100% |
| | | 660/690V [kA] | 10 | 12 | 10 | 12 | 10 | 20 |
| | DC | [%Icu] | 100% | 100% | 100% | 100% | 100% | 100% |
| Rated short-circuit making capacity Icm | AC | 220/240V [kA] | 220 | 264 | 220 | 264 | 220 | 264 |
| | | 380/415V [kA] | 143 | 187 | 143 | 187 | 143 | 220 |
| | | 440/460V [kA] | 143 | 187 | 143 | 187 | 143 | 220 |
| | | 480/500V [kA] | 88 | 143 | 88 | 143 | 88 | 187 |
| | | 525V [kA] | 46 | 74 | 46 | 74 | 46 | 74 |
| | | 660/690V [kA] | 17 | 40 | 17 | 40 | 17 | 40 |
| Trip Unit (release) Available | | | ETS, ETM | | ETS, ETM | | ETS, ETM | |
| Mechanical life | | Operations | 20000 | | 20000 | | 10000 | |
| Electrical life @415 VAC | AC | Operations | 10000 | | 6000 | | 3000 | |
| Reference standard | | | IEC60947-2 | | IEC60947-2 | | IEC60947-2 | |

TS400/630/800 ETS, Standard Electronic MCCB Setting Configuration

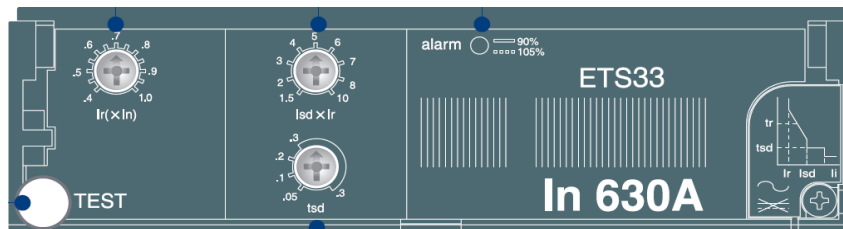
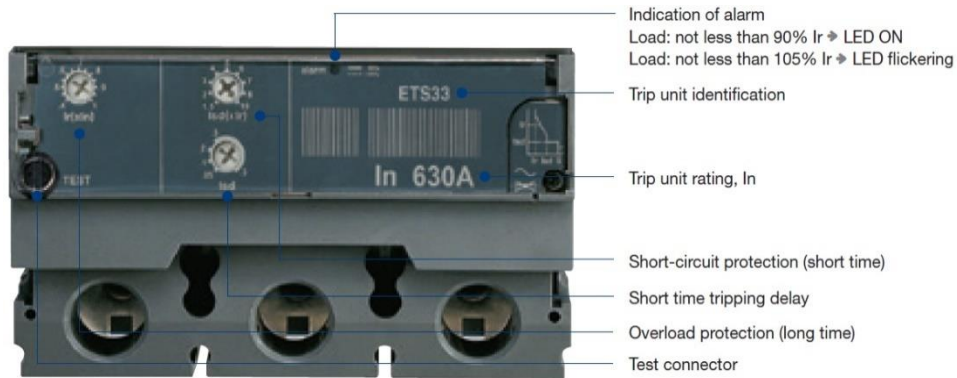


Figure 1 ETS33 Electronic Trip Unit


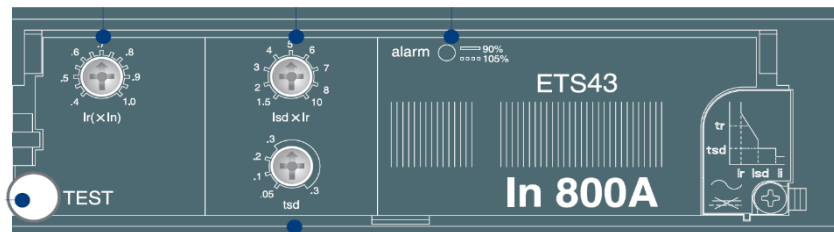


Figure 2 ETS43 Electronic Trip Unit

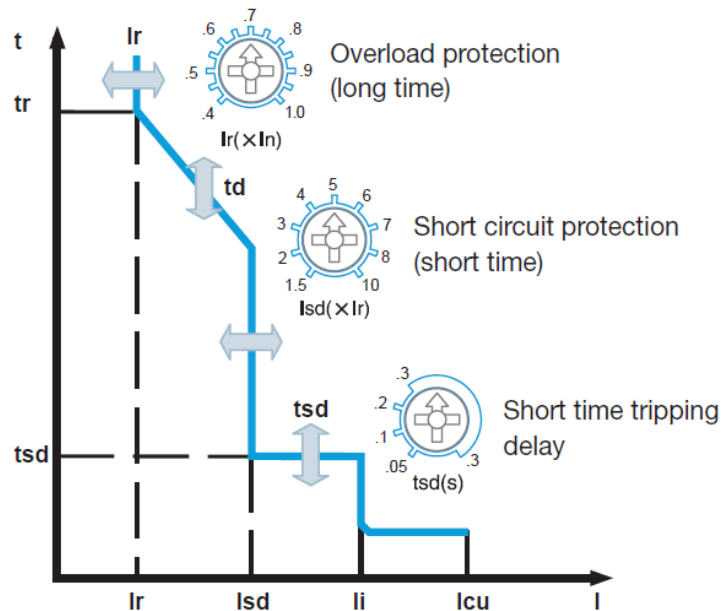

Overload Protection (Long Time), Ir

| Circuit Breakers | TS400 | TS630 | TS800 |
|------------------|--|-------|-------|
| Trip Unit In(A) | 400 | 630 | 800 |
| Setting Value | Overload Protection setting current, $I_r = \text{Setting Value}(0.4-1) \times I_n$ | | |
| 0.4 | 160 | 252 | 320 |
| 0.45 | 180 | 284 | 360 |
| 0.5 | 200 | 315 | 400 |
| 0.55 | 220 | 347 | 440 |
| 0.6 | 240 | 378 | 480 |
| 0.65 | 260 | 410 | 520 |
| 0.7 | 280 | 441 | 560 |
| 0.75 | 300 | 473 | 600 |
| 0.8 | 320 | 504 | 640 |
| 0.85 | 340 | 536 | 680 |
| 0.9 | 360 | 567 | 720 |
| 0.95 | 380 | 599 | 760 |
| 1 | 400 | 630 | 800 |

Long Time tripping delay, td (sec)

| | |
|-------------------|-----------------------------------|
| Tripping Time (s) | Fixed at 6 x Ir Tolerance ±20% |
|-------------------|-----------------------------------|

Short Time tripping setting, tsd (ms)

| | | | | | | |
|------------------|---------------------|---------|----------|-----------|-----------|------------|
| Time delay (tds) | setting time (ms) | 50 | 100 | 200 | 300 | 4 Settings |
| | operation time (ms) | 30<t≤70 | 70<t≤140 | 140<t≤240 | 240<t≤350 | |

Short circuit protection (Instantaneous), li (A)

| | |
|----------------------------|---------------------|
| Tripping Threshold (A), li | Fixed at 11 x In |
|----------------------------|---------------------|

Short-circuit Protection (short time), Isd(xlr)

| Circuit Breakers | | TS400 | TS630 | TS800 |
|------------------|-----|---|-------|-------|
| Trip Unit In(A) | | 400 | 630 | 800 |
| Setting Value | | Short Time pick up current Setting, Isd= Setting Value(1.5-1.0)xIr | | |
| 0.4 | 1.5 | 240 | 378 | 480 |
| 0.45 | | 270 | 425 | 540 |
| 0.5 | | 300 | 473 | 600 |
| 0.55 | | 330 | 520 | 660 |
| 0.6 | | 360 | 567 | 720 |
| 0.65 | | 390 | 614 | 780 |
| 0.7 | | 420 | 662 | 840 |
| 0.75 | | 450 | 709 | 900 |
| 0.8 | | 480 | 756 | 960 |
| 0.85 | | 510 | 803 | 1020 |
| 0.9 | | 540 | 851 | 1080 |
| 0.95 | | 570 | 898 | 1140 |
| 1 | | 600 | 945 | 1200 |
| 0.4 | | 2 | 320 | 504 |
| 0.45 | 360 | | 567 | 720 |
| 0.5 | 400 | | 630 | 800 |
| 0.55 | 440 | | 693 | 880 |
| 0.6 | 480 | | 756 | 960 |
| 0.65 | 520 | | 819 | 1040 |
| 0.7 | 560 | | 882 | 1120 |
| 0.75 | 600 | | 945 | 1200 |
| 0.8 | 640 | | 1008 | 1280 |
| 0.85 | 680 | | 1071 | 1360 |
| 0.9 | 720 | | 1134 | 1440 |
| 0.95 | 760 | | 1197 | 1520 |
| 1 | 800 | | 1260 | 1600 |
| 0.4 | 3 | | 480 | 756 |
| 0.45 | | 540 | 851 | 1080 |
| 0.5 | | 600 | 945 | 1200 |
| 0.55 | | 660 | 1040 | 1320 |
| 0.6 | | 720 | 1134 | 1440 |
| 0.65 | | 780 | 1229 | 1560 |
| 0.7 | | 840 | 1323 | 1680 |
| 0.75 | | 900 | 1418 | 1800 |
| 0.8 | | 960 | 1512 | 1920 |
| 0.85 | | 1020 | 1607 | 2040 |
| 0.9 | | 1080 | 1701 | 2160 |
| 0.95 | | 1140 | 1796 | 2280 |
| 1 | | 1200 | 1890 | 2400 |


| Circuit Breakers | | TS400 | TS630 | TS800 |
|------------------|------|---|-------|-------|
| Trip Unit In(A) | | 400 | 630 | 800 |
| Setting Value | | Short Time pick up current Setting, Isd= Setting Value(1.5-1.0)xIr | | |
| 0.4 | 4 | 640 | 1008 | 1280 |
| 0.45 | | 720 | 1134 | 1440 |
| 0.5 | | 800 | 1260 | 1600 |
| 0.55 | | 880 | 1386 | 1760 |
| 0.6 | | 960 | 1512 | 1920 |
| 0.65 | | 1040 | 1638 | 2080 |
| 0.7 | | 1120 | 1764 | 2240 |
| 0.75 | | 1200 | 1890 | 2400 |
| 0.8 | | 1280 | 2016 | 2560 |
| 0.85 | | 1360 | 2142 | 2720 |
| 0.9 | | 1440 | 2268 | 2880 |
| 0.95 | | 1520 | 2394 | 3040 |
| 1 | | 1600 | 2520 | 3200 |
| 0.4 | | 5 | 800 | 1260 |
| 0.45 | 900 | | 1418 | 1800 |
| 0.5 | 1000 | | 1575 | 2000 |
| 0.55 | 1100 | | 1733 | 2200 |
| 0.6 | 1200 | | 1890 | 2400 |
| 0.65 | 1300 | | 2048 | 2600 |
| 0.7 | 1400 | | 2205 | 2800 |
| 0.75 | 1500 | | 2363 | 3000 |
| 0.8 | 1600 | | 2520 | 3200 |
| 0.85 | 1700 | | 2678 | 3400 |
| 0.9 | 1800 | | 2835 | 3600 |
| 0.95 | 1900 | | 2993 | 3800 |
| 1 | 2000 | | 3150 | 4000 |
| 0.4 | 6 | | 960 | 1512 |
| 0.45 | | 1080 | 1701 | 2160 |
| 0.5 | | 1200 | 1890 | 2400 |
| 0.55 | | 1320 | 2079 | 2640 |
| 0.6 | | 1440 | 2268 | 2880 |
| 0.65 | | 1560 | 2457 | 3120 |
| 0.7 | | 1680 | 2646 | 3360 |
| 0.75 | | 1800 | 2835 | 3600 |
| 0.8 | | 1920 | 3024 | 3840 |
| 0.85 | | 2040 | 3213 | 4080 |
| 0.9 | | 2160 | 3402 | 4320 |
| 0.95 | | 2280 | 3591 | 4560 |
| 1 | | 2400 | 3780 | 4800 |




| Circuit Breakers | | TS400 | TS630 | TS800 |
|------------------|----|--|-------|-------|
| Trip Unit In(A) | | 400 | 630 | 800 |
| Setting Value | | Short Time pick up current Setting, $I_{sd} = \text{Setting Value}(1.5-1.0) \times I_r$ | | |
| 0.4 | 7 | 1120 | 1764 | 2240 |
| 0.45 | | 1260 | 1985 | 2520 |
| 0.5 | | 1400 | 2205 | 2800 |
| 0.55 | | 1540 | 2426 | 3080 |
| 0.6 | | 1680 | 2646 | 3360 |
| 0.65 | | 1820 | 2867 | 3640 |
| 0.7 | | 1960 | 3087 | 3920 |
| 0.75 | | 2100 | 3308 | 4200 |
| 0.8 | | 2240 | 3528 | 4480 |
| 0.85 | | 2380 | 3749 | 4760 |
| 0.9 | | 2520 | 3969 | 5040 |
| 0.95 | | 2660 | 4190 | 5320 |
| 1 | | 2800 | 4410 | 5600 |
| 0.4 | 8 | 1280 | 2016 | 2560 |
| 0.45 | | 1440 | 2268 | 2880 |
| 0.5 | | 1600 | 2520 | 3200 |
| 0.55 | | 1760 | 2772 | 3520 |
| 0.6 | | 1920 | 3024 | 3840 |
| 0.65 | | 2080 | 3276 | 4160 |
| 0.7 | | 2240 | 3528 | 4480 |
| 0.75 | | 2400 | 3780 | 4800 |
| 0.8 | | 2560 | 4032 | 5120 |
| 0.85 | | 2720 | 4284 | 5440 |
| 0.9 | | 2880 | 4536 | 5760 |
| 0.95 | | 3040 | 4788 | 6080 |
| 1 | | 3200 | 5040 | 6400 |
| 0.4 | 10 | 1600 | 2520 | 3200 |
| 0.45 | | 1800 | 2835 | 3600 |
| 0.5 | | 2000 | 3150 | 4000 |
| 0.55 | | 2200 | 3465 | 4400 |
| 0.6 | | 2400 | 3780 | 4800 |
| 0.65 | | 2600 | 4095 | 5200 |
| 0.7 | | 2800 | 4410 | 5600 |
| 0.75 | | 3000 | 4725 | 6000 |
| 0.8 | | 3200 | 5040 | 6400 |
| 0.85 | | 3400 | 5355 | 6800 |
| 0.9 | | 3600 | 5670 | 7200 |
| 0.95 | | 3800 | 5985 | 7600 |
| 1 | | 4000 | 6300 | 8000 |

TS400/630/800 ETS Characteristic Curve


- TS400NETS400
- TS400NETS400/4
- TS630NETS630
- TS630NETS630/4
- TS400HETS400
- TS400HETS400/4
- TS630HETS630
- TS630HETS630/4
- TS800NETS800
- TS800NETS800/4
- TS800HETS800
- TS800HETS800/4

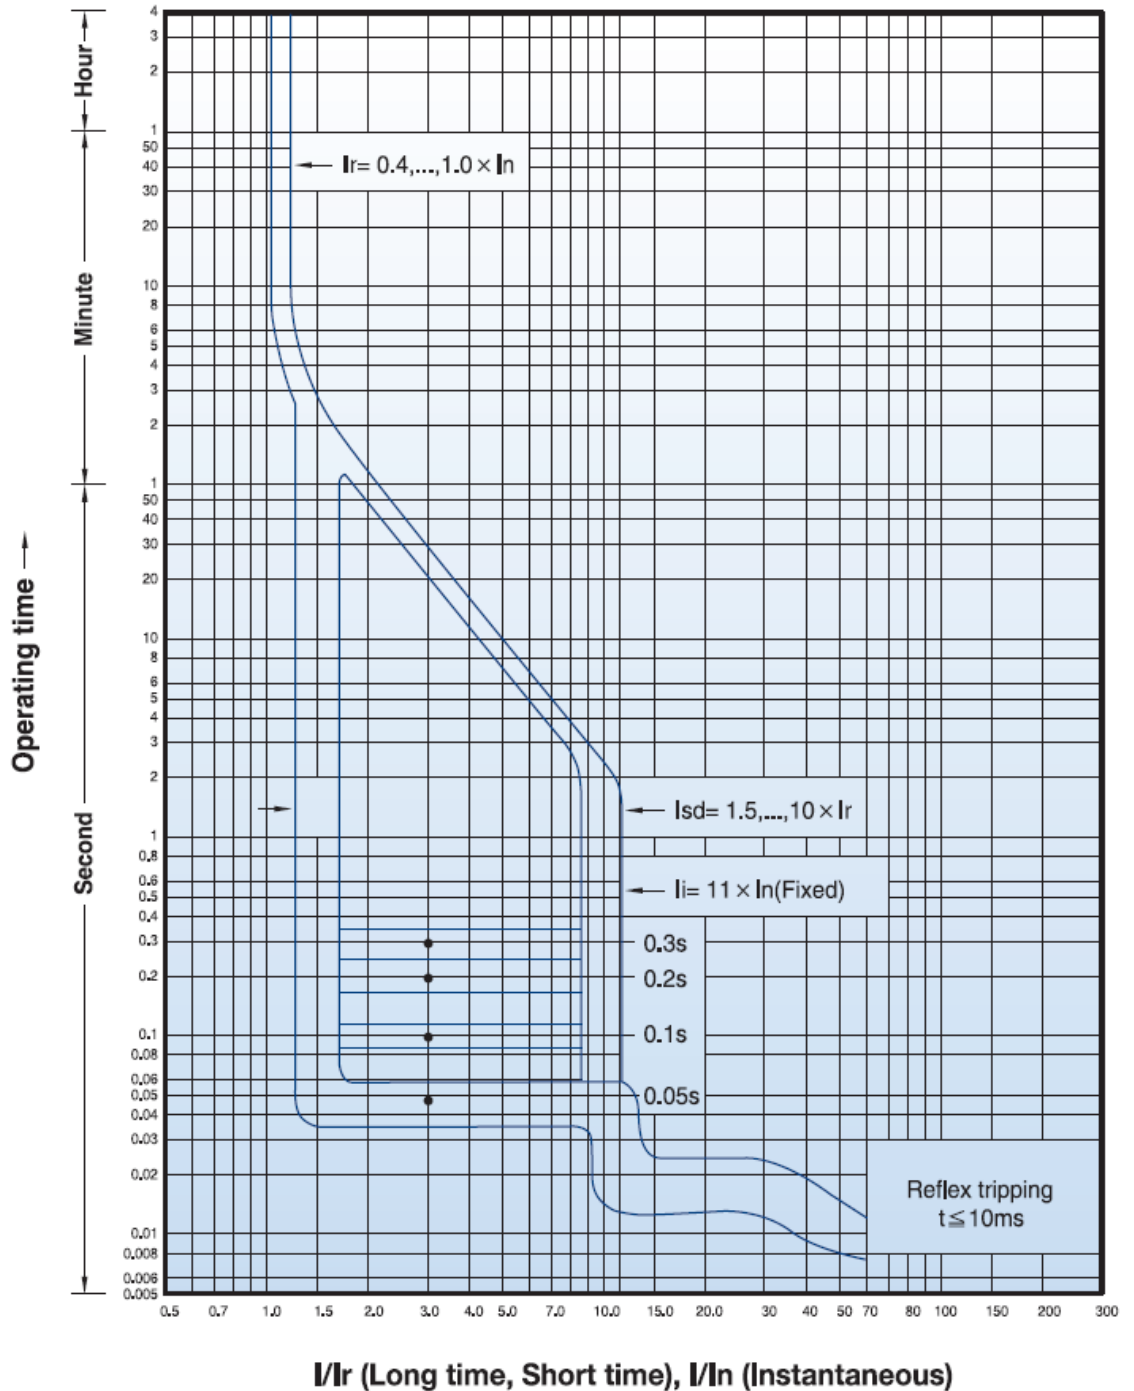

TS400/630/800 ETM, Multifunction Electronic MCCB Setting Configuration

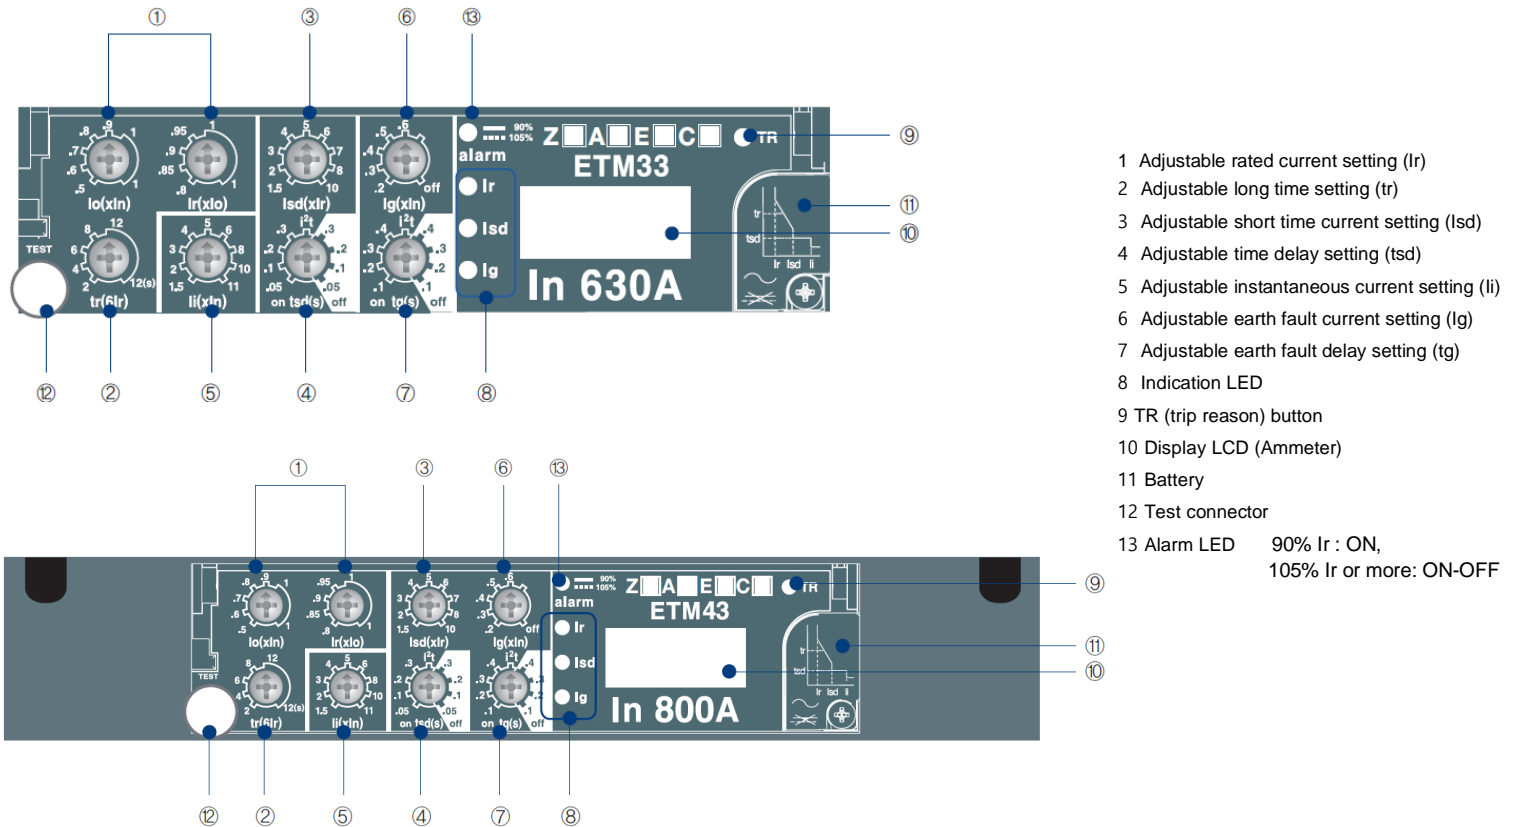

- 1 Adjustable rated current setting (Ir)
- 2 Adjustable long time setting (tr)
- 3 Adjustable short time current setting (Isd)
- 4 Adjustable time delay setting (tsd)
- 5 Adjustable instantaneous current setting (Ii)
- 6 Adjustable earth fault current setting (Ig)
- 7 Adjustable earth fault delay setting (tg)
- 8 Indication LED
- 9 TR (trip reason) button
- 10 Display LCD (Ammeter)
- 11 Battery
- 12 Test connector
- 13 Alarm LED 90% Ir : ON, 105% Ir or more: ON-OFF

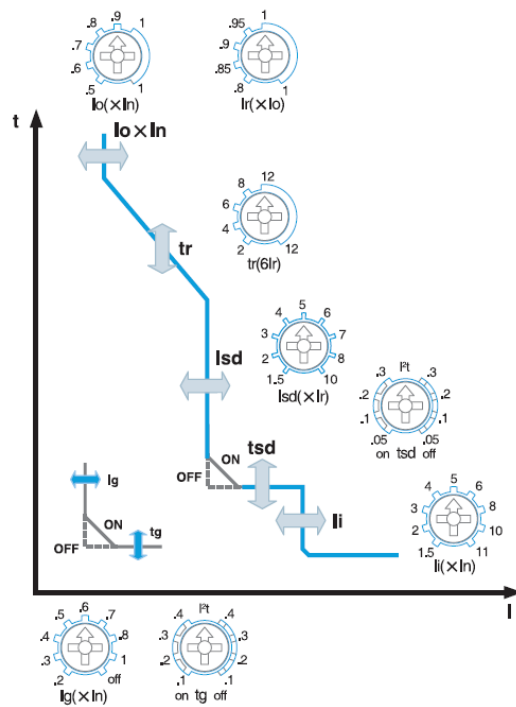

Long time protection against overloads
 lo = Coarse adjustment (function of I_n)
 Ir = Fine adjustment
 tr = Long time delay

Short circuit protection
 Isd = Short circuit threshold,
 tsd = Short circuit time delay
 I^2t curve in position ON or OFF


Instantaneous protection
 Ii = Instantaneous threshold

Earth fault protection
 Ig = Insulation fault threshold
 tg = Earth fault time delay
 I^2t curve in position ON or OFF

Overload Protection (Long Time), Ir


| Trip Unit Type | | TS400 | TS630 | TS800 |
|--------------------------|------------------------|---|--------|-------|
| Trip Unit In(A) | | 400 | 630 | 800 |
| Setting Value Coarse, Io | Setting value Fine, Ir | Short Time pick up current Setting, I _{sd} = Setting Value(1.5-1.0)xI _r | | |
| 0.5 | 0.8 | 160 | 252 | 320 |
| | 0.85 | 170 | 267.75 | 340 |
| | 9 | 1800 | 2835 | 3600 |
| | 0.95 | 190 | 299.25 | 380 |
| | 1 | 200 | 315 | 400 |
| 0.6 | 0.8 | 192 | 302.4 | 384 |
| | 0.85 | 204 | 321.3 | 408 |
| | 9 | 2160 | 3402 | 4320 |
| | 0.95 | 228 | 359.1 | 456 |
| | 1 | 240 | 378 | 480 |
| 0.7 | 0.8 | 224 | 352.8 | 448 |
| | 0.85 | 238 | 374.85 | 476 |
| | 9 | 2520 | 3969 | 5040 |
| | 0.95 | 266 | 418.95 | 532 |
| | 1 | 280 | 441 | 560 |
| 0.8 | 0.8 | 256 | 403.2 | 512 |
| | 0.85 | 272 | 428.4 | 544 |
| | 9 | 2880 | 4536 | 5760 |
| | 0.95 | 304 | 478.8 | 608 |
| | 1 | 320 | 504 | 640 |
| 0.9 | 0.8 | 288 | 453.6 | 576 |
| | 0.85 | 306 | 481.95 | 612 |
| | 9 | 3240 | 5103 | 6480 |
| | 0.95 | 342 | 538.65 | 684 |
| | 1 | 360 | 567 | 720 |
| 1 | 0.8 | 320 | 504 | 640 |
| | 0.85 | 340 | 535.5 | 680 |
| | 9 | 3600 | 5670 | 7200 |
| | 0.95 | 380 | 598.5 | 760 |
| | 1 | 400 | 630 | 800 |

Setting example :

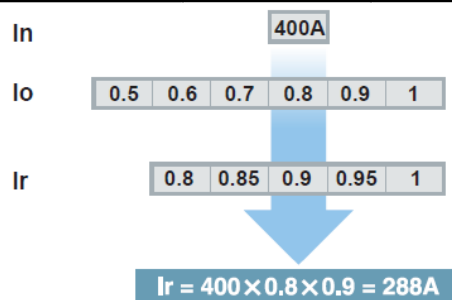



Short Circuit Protection, I_{sd} (A)

Setting example :

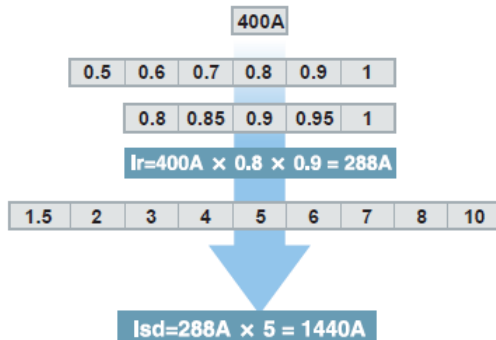


The breaker trips when the current exceeds 2880 A.



Short circuit time delay, t_{sd}

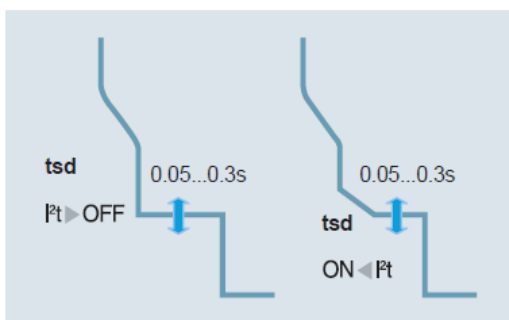

Earth fault protection(E), optional

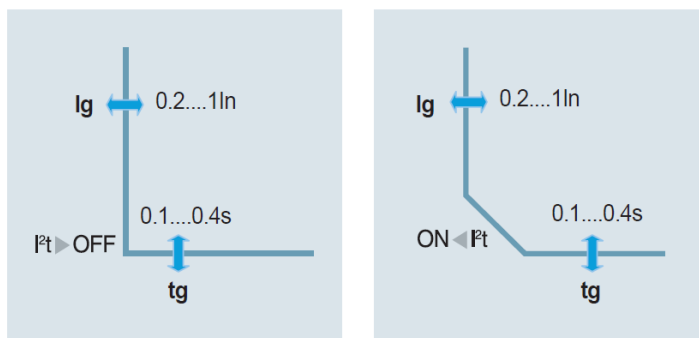

I_g = insulation fault threshold
t_g = earth fault time delay




Optional units

The following optional units can be added to the ETM Electronic MCCB,

- **A-Ammeter (A)**; measure of current with an accuracy of ±10%.
- **Z-Zone selective interlocking (ZSI)**; reduce stress on components during short-circuit or earth fault conditions, reduces tripping time and reduced damages caused by faults of interference to the power supply. **DC24V power supply required.**
- **C-Communication**; RS485 (Modbus-RTU) interface, connection available to all kinds of PLC and computers. Transmitted data; protection setting values, highest current of the three phases, "R, S, T and N" phase currents and fault reading (Overload, short-circuit, etc.).


TS400/630/800 ETM Characteristic Curve

- TS400NETM400
- TS400NETM400/4
- TS630NETM630
- TS630NETM630/4
- TS800NETM800
- TS800NETM800/4
- TS800HETM800
- TS800HETM800/4

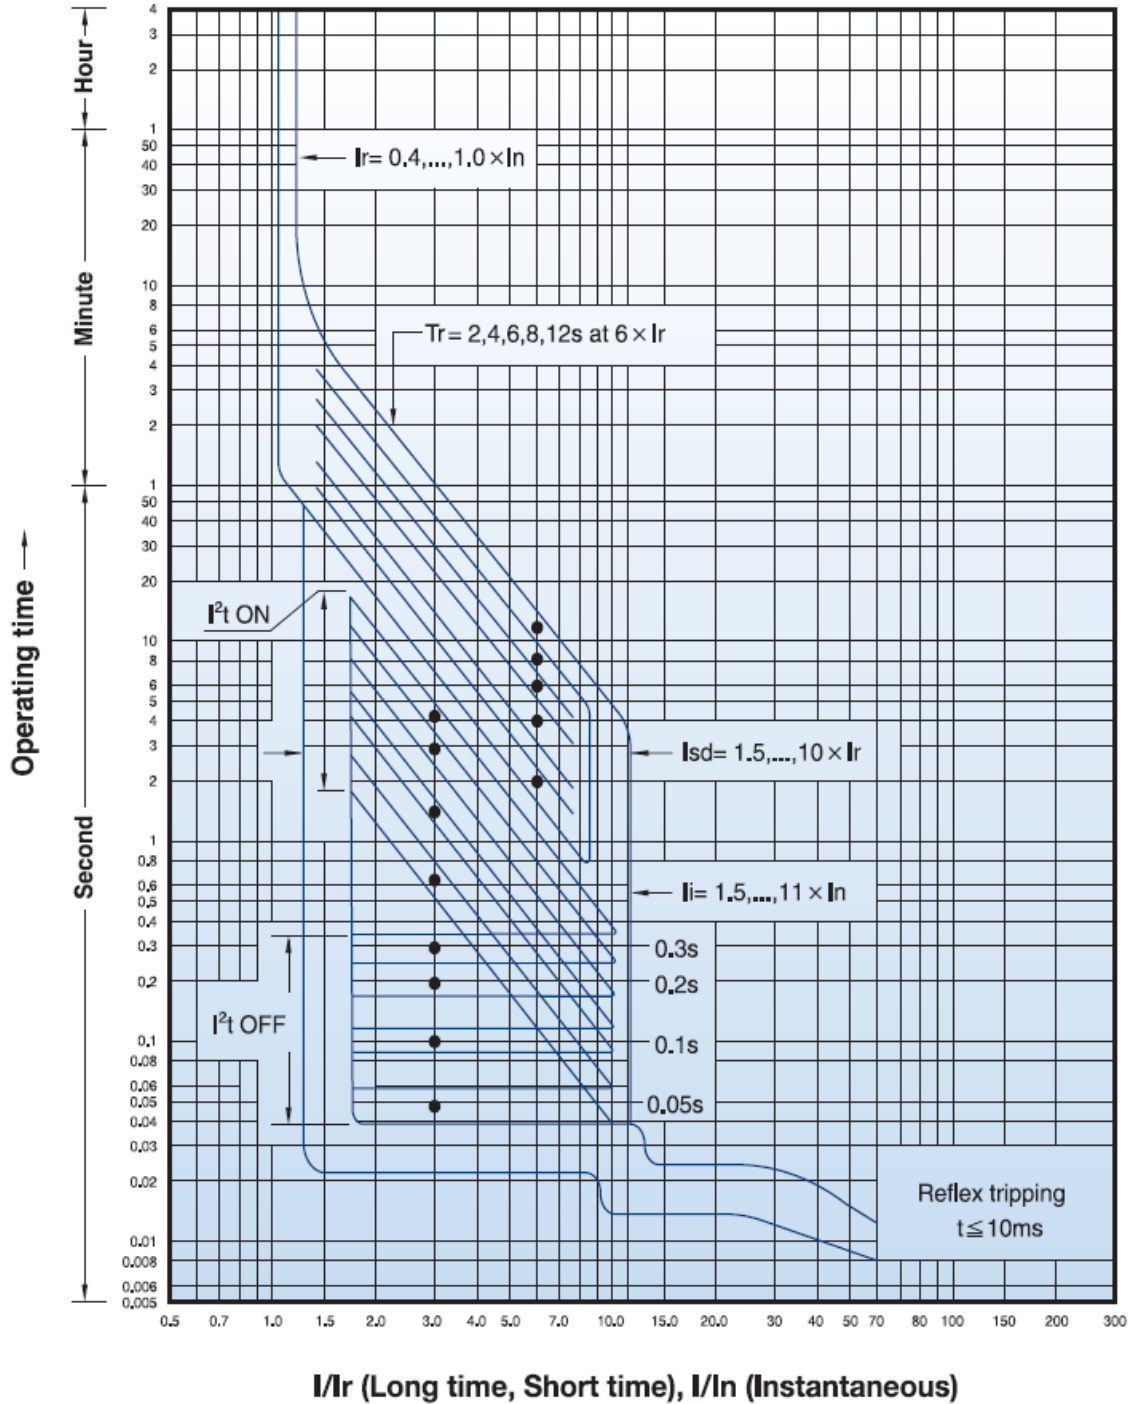

TS400/630/800 ETM Ground Fault (G) Curve

- TS400NETM400
- TS400NETM400/4
- TS630NETM630
- TS630NETM630/4
- TS800NETM800
- TS800NETM800/4
- TS800HETM800
- TS800HETM800/4

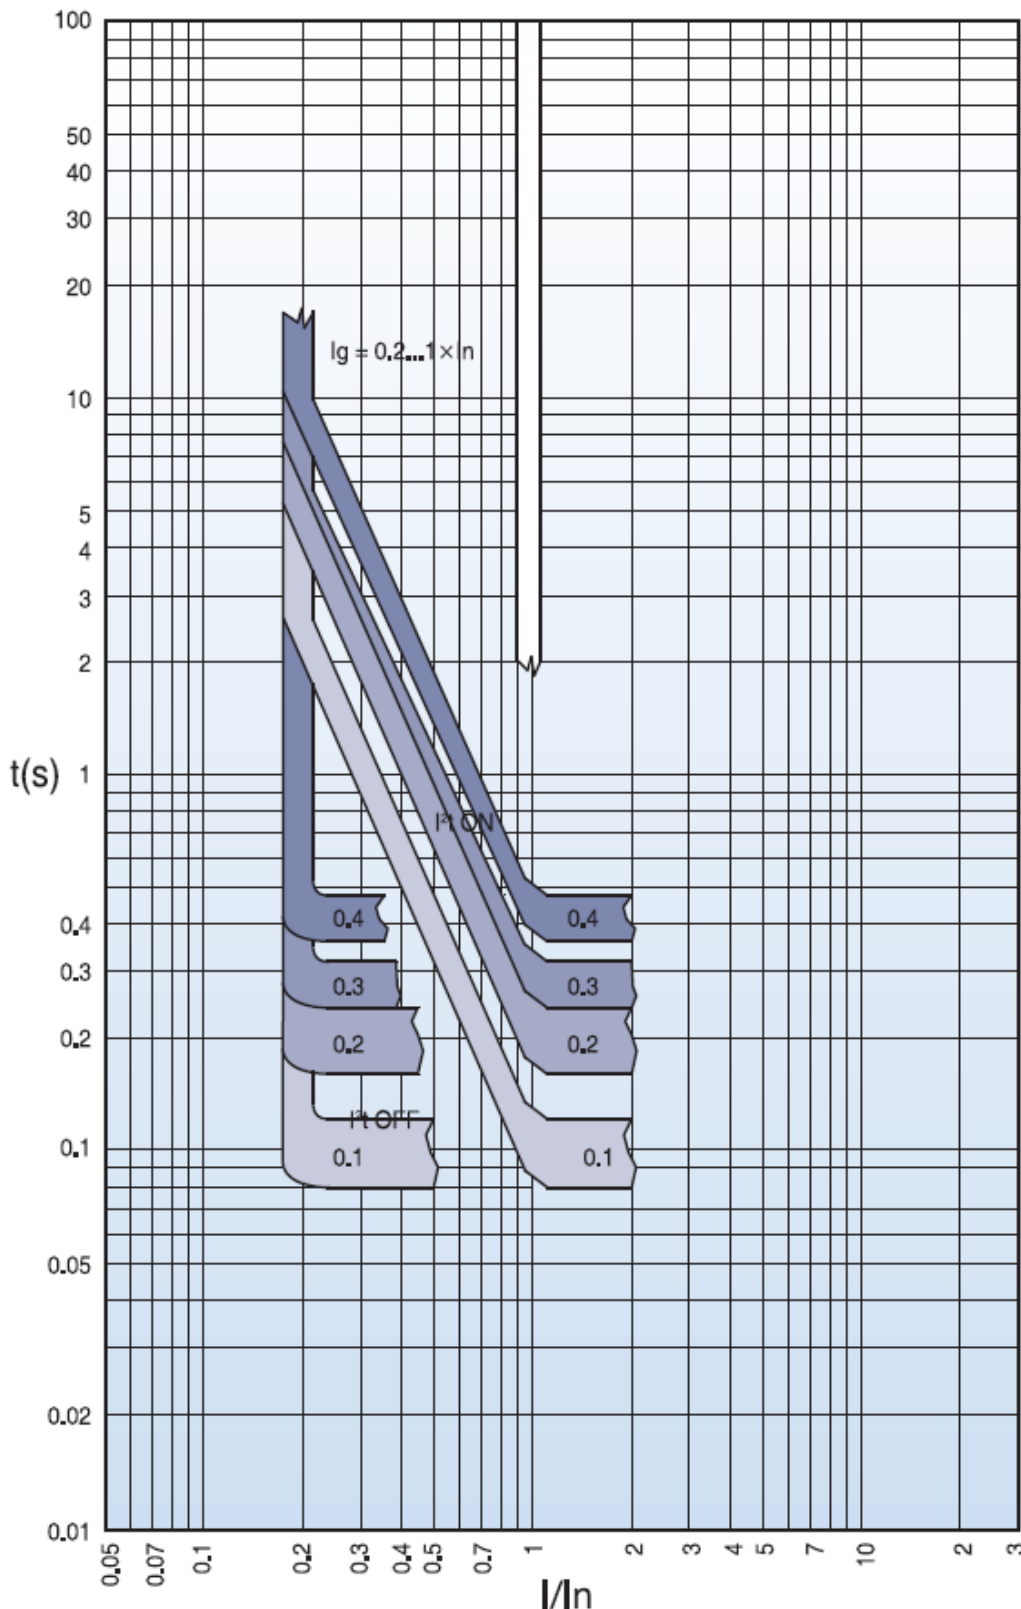


Catalogue number: **TS400/630/800 Range**


Thermal Magnetic and Electronic MCCB: 2,3,4 Pole 160A ~ 800A




TS400/630 Overall Dimensions

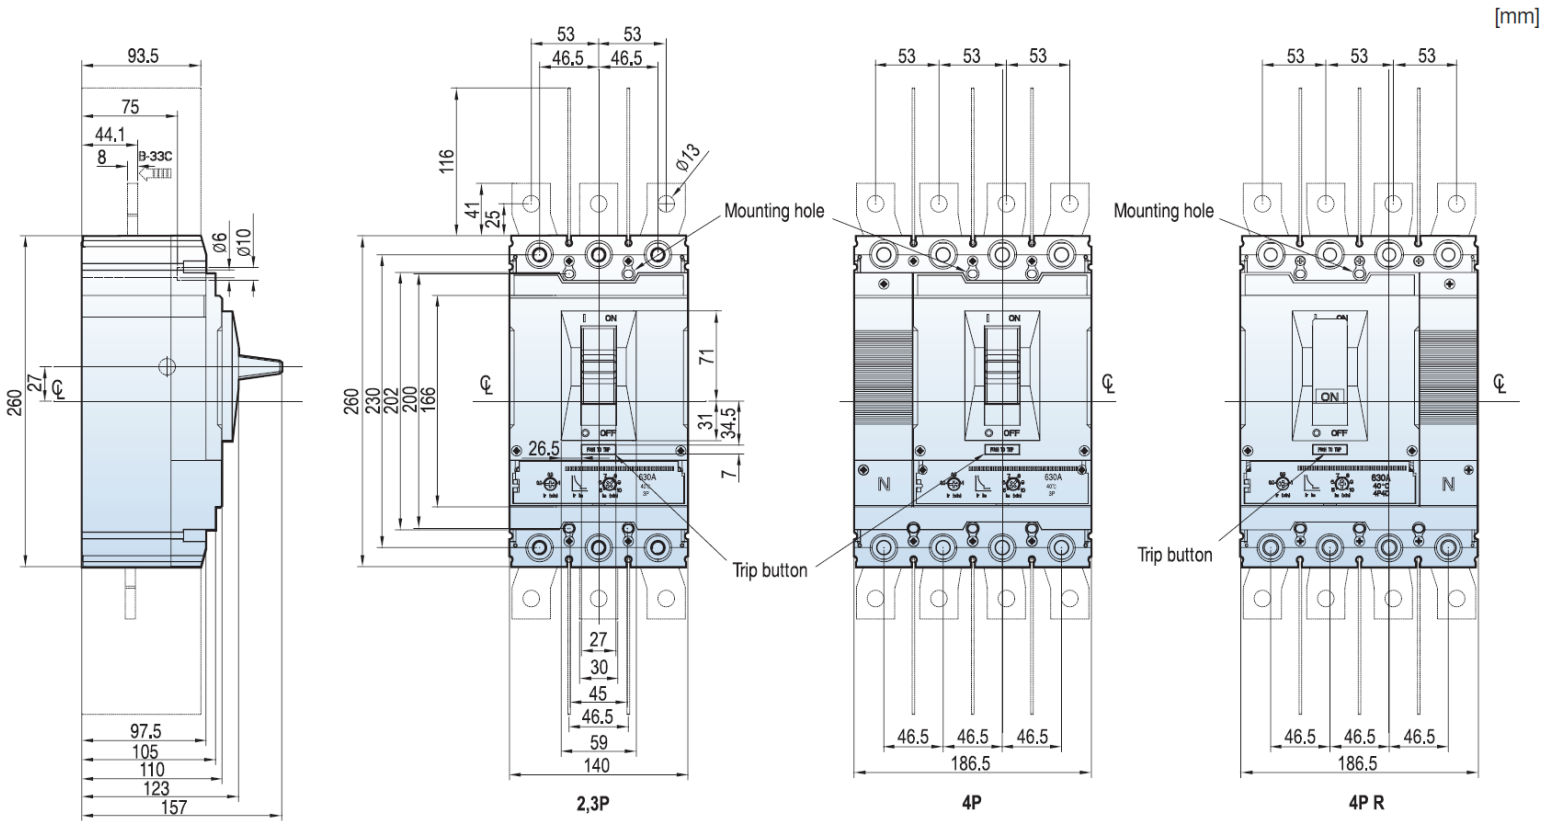


Terminal section




Conductor



Panel drilling

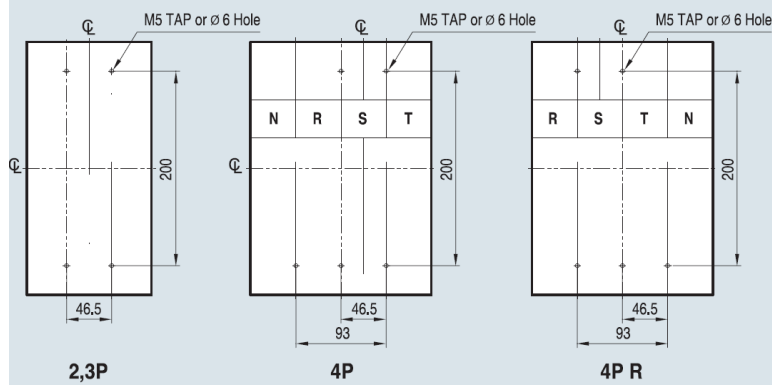


Front panel cutting

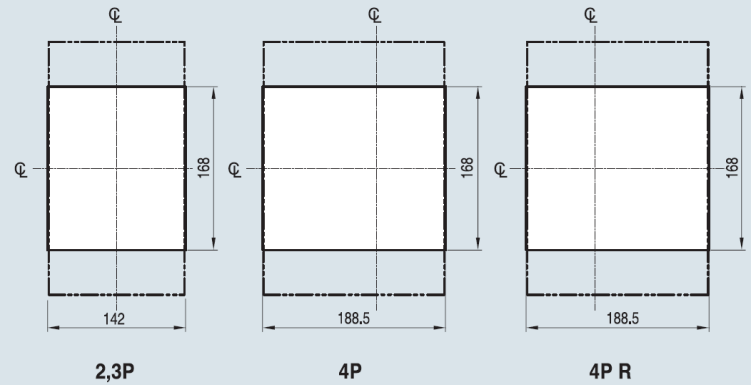



TS800 Overall Dimensions

[mm]

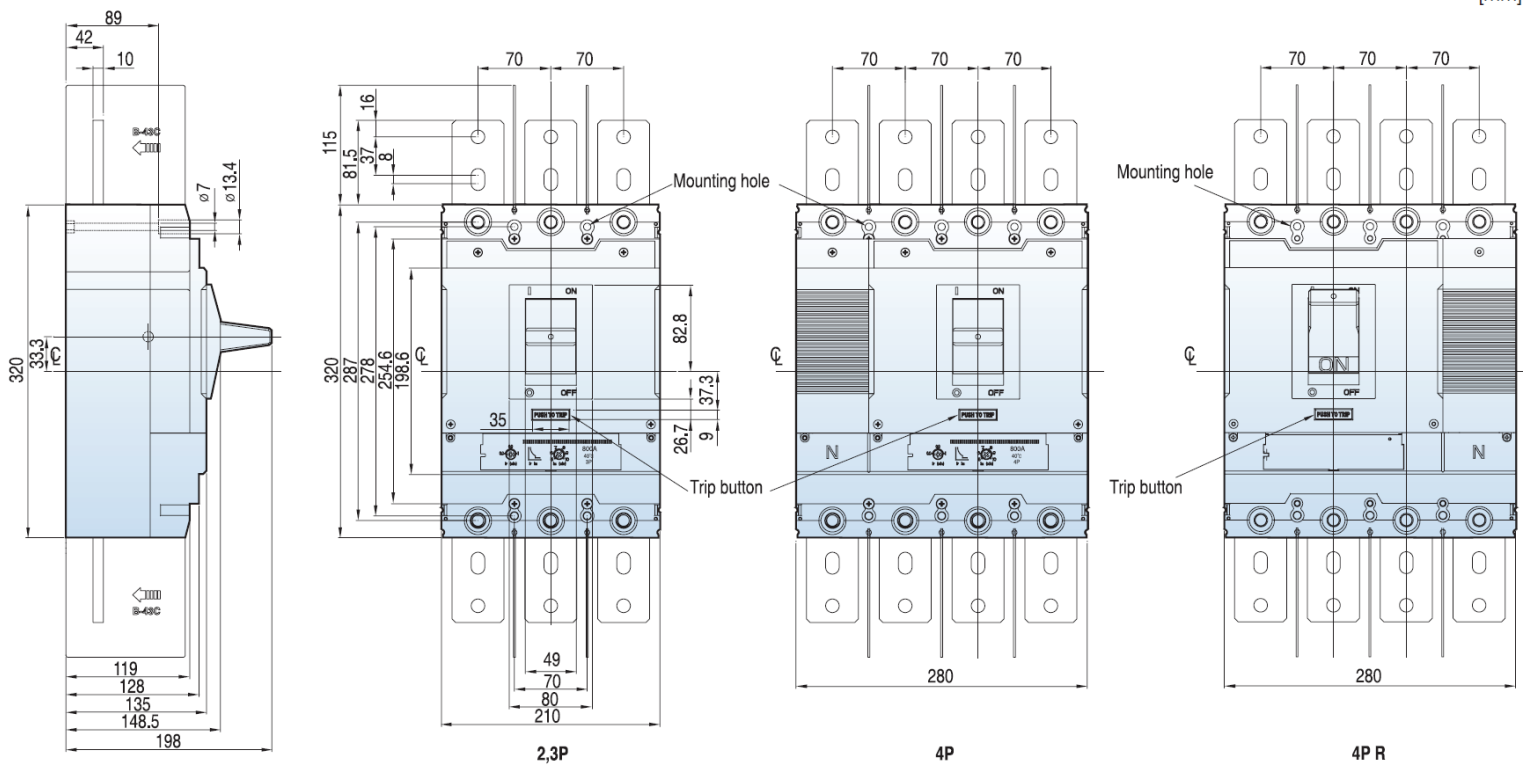

Terminal section

Conductor



Panel drilling

Front panel cutting

