



VFD-C2000

Classical Field Oriented Control AC Motor Drive



www.delta.com.tw/industrialautomation

IBU Headquarters

Delta Electronics, Inc.

Taoyuan
31-1, Xingbang Road, Guishan Industrial Zone,
Taoyuan County 33370, Taiwan, R.O.C.
TEL: 886-3-362-6301 / FAX: 886-3-362-7267

Asia

Delta Electronics (Jiang Su) Ltd.

Wuliang Plant3
1688 Jiangxing East Road,
Wuliang Economy Development Zone,
Wuliang City, Jiang Su Province,
People's Republic of China (Post code: 215200)
TEL: 86-512-6340-3008 / FAX: 86-512-6340-7290

Delta Greentech (China) Co., Ltd.

238 Min-Xia Road, Cao-Lu Industry Zone, Pudong, Shanghai,
People's Republic of China
Post Code: 201209
TEL: 021-58635678 / FAX: 021-58630003

Delta Electronics (Japan), Inc.

Tokyo Office
Delta Shibadaimon Building, 2-1-14
Shibadaimon, Minato-Ku, Tokyo, 105-0012,
Japan
TEL: 81-3-5733-1111 / FAX: 81-3-5733-1211

Delta Electronics (Korea), Inc.

234-9, Duck Soo Building 7F, Nonhyun-Dong,
Kangnam-Gu, Seoul, Korea 135-010
TEL: 82-2-515-5305 / FAX: 82-2-515-5302

Delta Electronics (Singapore) Pte. Ltd.

8 Kaki Bukit Road 2, #04-18 Ruby Warehouse Complex,
Singapore 417841
TEL: 65-6747-5155 / FAX: 65-6744-9228

Delta Electronics (India) Pvt. Ltd.

Plot No. 43, Sector - 35, HSIDC,
Gurgaon 122001, Haryana, India
TEL: 91-124-416-9040 / FAX: 91-124-403-6045

America

Delta Products Corporation (USA)

Raleigh Office
P.O. Box 12173, 5101 Davis Drive,
Research Triangle Park, NC 27709, U.S.A.
TEL: 1-919-767-3813 / FAX: 1-919-767-3969

Delta Products Corporation (Brazil)

Sao Paulo Office
Rua Itapeva, N° 26, 3° andar, Bela Vista
ZIP: 01332-000 - Sao Paulo - SP - Brasil
TEL: 55-11-3568-3875 / FAX: 55-11-3568-3865

Europe

Deltronics (The Netherlands) B.V.

Eindhoven Office
De Witboog 15, 5652 AG Eindhoven, The Netherlands
TEL: 31-40-2592850 / FAX: 31-40-2592851



certification
in progress





Leading the Future of Drive Technology

Delta Electronics, a leading brand in drive technology, has officially launched its most cost-effective classical field oriented control in AC motor drive VFD-C2000 series. This series offers four competitive values "high efficiency, high performance, low cost of maintenance and long product life" to customers to enhance their competitive advantage while spending less cost.

Standard Models (IP20/NEMA1)

Power range: 230V 0.75~90kW, 460V 0.75~355kW

230V (kW)	0.75	A			B			C			D			E			F		
		1	2	3	5	7.5	10	15	20	25	30	40	50	60	75	100	125		
230V (HP)	1	2	3	5	7.5	10	15	20	25	30	40	50	60	75	100	125			
460V (kW)	0.75	1.5	2.2	3.7	4.0	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90		
460V (HP)	1	2	3	5	7.5	10	15	20	25	30	40	50	60	75	100	125			

132	160	185	220	280	315	355
175	215	250	300	375	425	475

Main Functions and Features

- Field oriented control with built-in PLC function
- Wide variety of applications
- Modular design for easy maintenance and many extensions
- Built-in MODBUS communication
- Long-life design and self diagnosis
- Enhanced protections and adaptation to ambient conditions
- Complies with global safety standards, including CE, UL and cUL
- Wide range of models to meet requirements
- High-speed communication interface
- Fully CANopen master and slave functions prepared, only option converter card CMC-COP01 needed.

(optional cards for PROFIBUS-DP, DeviceNet, MODBUS TCP and EtherNet/IP)

High-performance Variable-frequency Technology

- High bandwidth control
- Speed/torque/position control mode
- Dual rating design (Normal duty/heavy duty)
- 4-quadrant torque control and limit
- A drive for induction motor and synchronous motor

Versatile Driving Controls

- Built-in safe stop function
- Built-in PLC function
- Built-in brake unit
- Support various network protocols
- Synchronous position control

Environmental Adaptability

- 50°C operating temperature
- Built-in DC reactor
- Coated circuit boards
- Built-in RFI filter
- Global safety standards (CE/UL/cUL)



Modular Design

- Hot-plugging digital keypad
- I/O extension cards
- Various PG (encoder) feedback cards
- Network cards for fieldbus modules
- Removable fan

Modular Design

- Various accessories options, such as I/O extension cards, encoder feedback cards, communication cards, hot-plugging LCM keypad, removable terminals and removable fan.

PG (Encoder) cards
EMC-PG010
EMC-PG01U
EMC-PG01L
EMC-PG01R

I/O cards
EMC-R6AA
EMC-D42A
EMC-D611A

Communication cards
CMC-PD01
CMC-DN01
CMC-MOD01
CMC-EIP01
EMC-COP01

Removable fan
To ensure personal safety, do not begin wiring before the indicator light is off.

Power indicator
To prevent personal injury, please do not perform wiring before power indicator is off.

Removable terminals
Convenient wiring and safety equipment.

Analog I/O switch

Termination resistor

Dual RJ45 communication ports

***NOTE: ▶* are optional accessories.**

- The modular design fulfills the needs of system applications and equipment maintenance.

■ Easy to remove with one touch

■ Uses standard RJ45 cable for long-distance operation

■ Optional accessory

■ RF filter disconnection

■ Press the tabs on both sides of the front cover after the screws are removed.

■ With its modular design, the fan is easy to clean and replace for longer fan life.

■ Product label includes I/O current, voltage and enclosure rating

Environmental Adaptability Design

- The built-in DC reactor and RFI filter controls harmonics and noise interference effectively.
- Strong coating to ensure safe operation in harsh environments
- Heatsink and electronics components are completely isolated from each other. With the following two heatsink designs, the best cooling according to requirements is achieved:
(1) Flange mounting: Heat from the drive can be dissipated out of the cabinet
(2) Forced fan cooling: Blow cool air into aluminum heatsink.




High-speed Network Building

- Provides various communication network cards and fieldbus cards
- Built-in RS-485 modbus protocol

CANopen (DS402)

- Supports all Delta industrial automation products (all EDS files of Delta industrial automation products are built-in)
- I/O data layout of each pieces of equipments on the CANopen Network
- Planning function for motion control
- WPL Soft

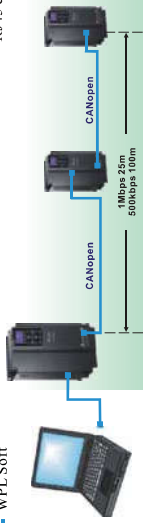

- TAP-CN03 distribution box for long distances



DeviceNet
Delta DeviceNet Builder software is specially designed for DeviceNet communication. With this software, it is easy to plan DeviceNet equipment and remote I/O via parameters to build a standard DeviceNet monitoring structure.

- Supports all Delta industrial automation products (all EDS files of Delta industrial automation products are built-in)
- I/O data layout of each piece of equipment in the DeviceNet network
- DeviceNet layout software



EtherNet/IP
MODBUS TCP
Delta's communication integrator software not only provides graphic module setting and human interface design but also supports settings and online monitoring for all Ethernet products

- Delta software for Ethernet/MODBUS TCP products
- Graphic module setting and human interface design
- Auto search function
- Setting interface for virtual COM port




Convenient Operation Platform for Drive System Management

Provides a complete operation platform for users' easy control and monitoring via PC, including parameters save/setting, real-time wave monitor, quick setup, for multiple languages and with multi-language operation systems.

- Trend records** ← Monitors operation curve of the drive by communication and displays I/O terminal status. Useful for tasks such as 'trial non-monitoring'.
- Start-up display** → Displays horsepower, rated voltage and current of present model!
- Parameter management** → Provides parameter copy/comparison for convenient parameter management.
- Quick setup** ← Guides the user step-by-step to complete the quick setup according to quick setup wizard.


Enhanced Motor Efficiency in General Applications

Improved sensorless vector control (SVC) response and torque control in, for example, crane applications.



High-performance Field Oriented Control

In FOC+PG mode, C2000 is capable of creating a start-up torque up to 200% at extremely low speed to result a much stable speed control.

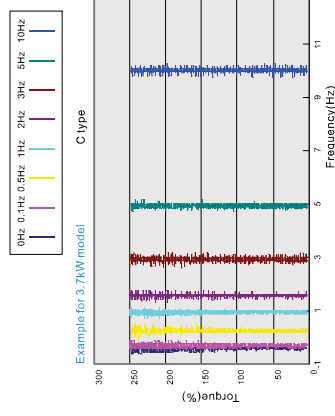


Safe Stop Function

VFD-C2000 series is built according to category safe stop standard: EN954-1, EN60204-1 and IEC6158 to prevent personal injury at accidental start-up.




Improved Load Impact

When load changes, VFD-C2000 will provide a best torque response by FOC to minimize the vibration of load impact.

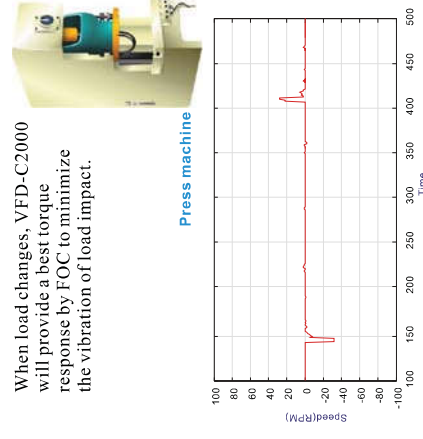


High-performance Field Oriented Control

A best choice for precise position and speed control, applicable to e.g. control printing machine.

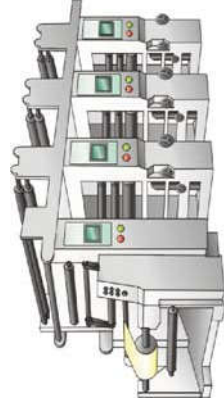


Innovative PID Technology

Apart from traditional PI control, VFD-C2000 also provides PDFF control in speed regulation to eliminate overshoot and increase response time.

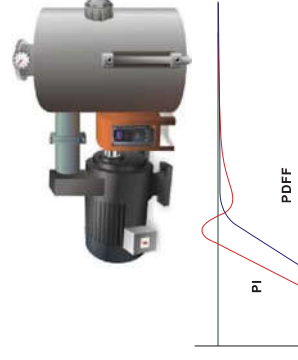


Intelligent Programmable Logic Controller

- In network systems, distributed control and independent operation can easily be achieved with the built-in Delta PLC.

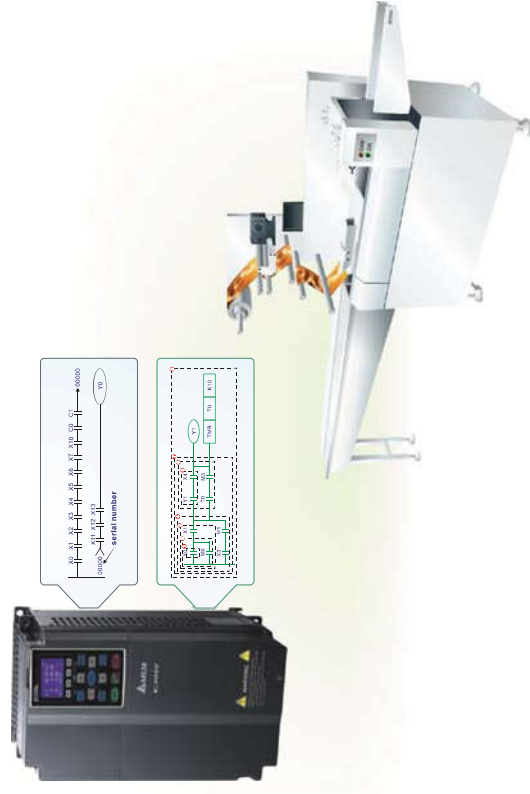

A Drive for Permanent Magnet (PM) Motors

- VFD-C2000 is a dual mode drive for induction motors and permanent magnet motors. The dynamic response of a PM motor provides precise control of position, speed and torque.

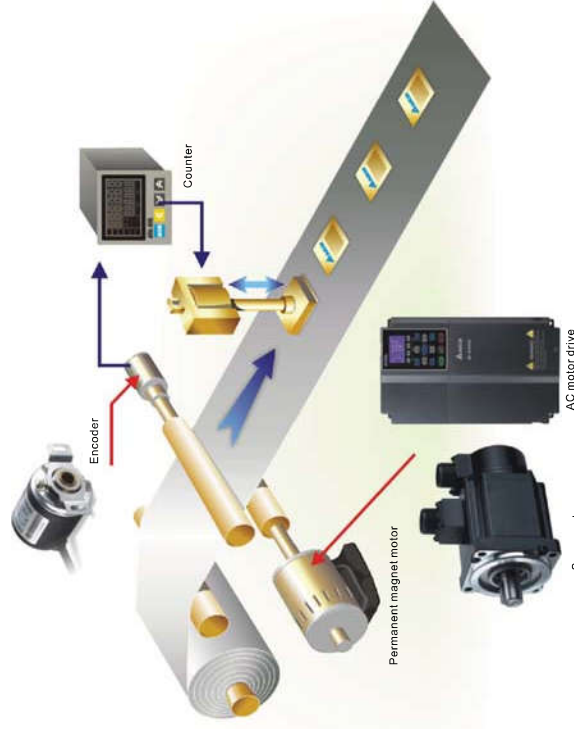

Environment for Operation, Storage and Transportation

DO NOT expose the AC motor drive in the bad environment, such as dust, direct sunlight, corrosive/inflammable gasses, humidity, liquid and vibration environment. The salt in the air must be less than 0.01mg/cm³ every year.

Installation location	IEC60364-1/IEC60664-1 Pollution degree 2, indoor use only
Surrounding Temperature	Storage/Transportation -25°C ~ +70°C
Rated Humidity	No-condensation, non-frozen Operation Max. 90%
	Storage/Transportation Max. 95%
Air Pressure	No condense water Operation/Storage 86 to 106 kPa
	Transportation 70 to 106 kPa
Pollution Level	IEC60721-3-3 Operation Class 3C2 : Class 3S2
	Storage Class 2C2 : Class 2S2
	Transportation Class 1C2 : Class 1S2
Altitude	No concentrate Operation If AC motor drive is installed at altitude 0~1000m, follow normal operation restriction. If it is install at altitude 1000~3000m, decrease 2% of rated current or lower 0.5°C of temperature for every 100m increase in altitude. Maximum altitude for Corner Grounded is 2000m.
	Storage/Transportation ISTA procedure 1A(according to weight)/IEC60068-2-31 1.0mm, peak to peak value range from 2Hz to 13.2 Hz; 0.7G~1.0G range from 13.2Hz to 58Hz; 1.0G range from 55Hz to 512 Hz. Comply with IEC 60068-2-6
Package Drop	IEC/EN 60068-2-27
Vibration	Max. allowed offset angle ±10° (under normal installation position)
Impact	10 ⁻² → 10 ⁻¹⁰
Operation Position	

Specification for Operation Temperature and Protection Level

Model	Frame	Top cover	Conduit Box	Protection Level	Operation Temperature
VFDxxxCxxA	Frame A-C 230V: 0.75~22kW 460V: 0.75~30kW	Remove top cover Standard with top cover	Standard conduit plate	IP20/UL-Open Type IP20/UL Type1/NEMA1	-10°C ~50°C -10°C ~40°C
	Frame D-H 230V: >22kW 460V: >30kW	N/A	No conduit box	IP00 IP20/UL-Open Type	-10°C ~50°C
VFDxxxCxxE	Frame A-C 460V: 0.75~30kW	Remove top cover Standard with top cover	Standard conduit plate	IP20/UL-Open Type IP20/UL Type1/NEMA1	-10°C ~50°C -10°C ~40°C
	Frame D-H 230V: >22kW 460V: >30kW	N/A	Standard conduit box	IP20/UL Type1/NEMA1	-10°C ~40°C

Only the circled area is IP00, others are IP20.

Specifications

230V	Frame Size		A		B		C		D		E		F			
Model VFD--C--	007	015	022	037	055	075	110	150	185	220	300	370	450	550	750	900
Applicable Motor Output (kW)	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90
Applicable Motor Output (hp)	1	2	3	5	7.5	10	15	20	25	30	40	50	60	75	100	125
Rated Output Capacity (kVA)	1.9	2.8	4.0	6.4	9.6	12	19	25	28	34	45	55	68	81	96	131
Rated Output Current (A)	4.8	7.1	10	16	24	31	47	62	71	86	114	139	171	204	242	329
Carrier Frequency (kHz)	2-6kHz															
Rated Output Capacity (kVA)	2.0	3.2	4.4	6.8	10	13	20	26	30	36	48	58	72	86	102	138
Rated Output Current (A)	5	8	11	17	25	33	49	65	75	90	120	146	180	215	255	346
Carrier Frequency (kHz)	2-15kHz															
Input Current (A)	6.1	11	15	18.5	26	34	50	68	78	95	118	136	162	196	233	315
Input Current (A) Normal Duty	6.4	12	16	20	28	36	52	72	83	99	124	143	171	206	245	331
Rated Voltage/Frequency	3-phase AC 200V-240V (-15%--+10%), 50/60Hz															
Operating Voltage Range	170-265Vac															
Frequency Tolerance	47-63Hz															
Cooling Method	Natural cooling															
DC Reactor	Built-in															
Braking Chopper	Option															
EMI Filter	Option															

460V	Frame Size		D		E		*F		*G		*H	
Model VFD--C--	370	450	550	750	900	1100	1320	1600	1850	2200	2800	3150
Applicable Motor Output (kW)	37	45	55	75	90	110	132	160	185	220	280	315
Applicable Motor Output (hp)	50	60	75	100	125	150	175	215	250	300	375	425
Rated Output Capacity (kVA)	55	69	84	114	136	167	197	235	280	348	417	466
Rated Output Current (A)	69	86	105	143	171	209	247	295	352	437	523	585
Carrier Frequency (kHz)	2-6kHz											
Rated Output Capacity (kVA)	58	73	88	120	143	175	207	247	295	367	438	491
Rated Output Current (A)	73	91	110	150	180	220	260	310	370	460	550	616
Carrier Frequency (kHz)	2-10kHz											
Input Current (A) Heavy Duty	70	96	108	149	159	197	228	285	361	380	469	527
Input Current (A) Normal Duty	74	101	114	157	167	207	240	300	380	400	494	555
Rated Voltage/Frequency	3-phase AC 380V-480V (-15%--+10%), 50/60Hz											
Operating Voltage Range	323-528Vac											
Frequency Tolerance	47-63Hz											
Cooling Method	Fan cooling											
Braking Chopper	Option											
DC Reactor	Built-in											
EMI Filter	VFDXXX43A: without EMI filter VFDXXX43E: built-in EMI filter											

General Specifications

Control Method	1: V/F, 2: SVC, 3: VF+PG, 4: FOC+PG, 5: TOC+PG,
Starting Torque	Reach up to 150% or above at 0.5Hz. Under FOC+PG mode, starting torque can reach 150% at 0Hz.
V/f Curve	4-point adjustable V/f curve and square wave
Speed Response Ability	5Hz (vector control can reach up to 40Hz)
Torque Limit	Max. 200% torque current
Torque Accuracy	±5%
Max. Output Frequency (Hz)	Normal duty: 0.01~600.00Hz; Heavy duty: 0.00~300.00 Hz
Frequency Output Accuracy	Digital command: ±0.01%, -10C--+40C, Analog command: ±0.1%, 25±10C
Output Frequency Resolution	Digital command: 0.01Hz, Analog command: 0.03 X max. output frequency/60 Hz (±11 bit)
Overload Tolerance	Normal duty: rated output current is 120% for 60seconds Heavy duty: rated output current is 150% for 60seconds
Frequency Setting Signal	+10V~-10.0--+10V, 4-20mA, 0-20mA, Pulse input
Accel./Decel. Time	0.00-600.00/0.0-60000.0 Seconds
Main Control Function	Torque control, Droop control, Speed/torque control switching, Feed forward control, Zero-servo control, Momentary power loss ride thru, Speed search, Over-torque detection, Torque limit, 17-step speed (max.), Accel./decel time switch, S-curve accel./decel, 3-wire sequence, Auto-Tuning (rotational, stationary), Dwell, Cooling fan on/off switch, Slip compensation, Torque compensation, JOG frequency, Frequency upper/lower limit settings, DC injection braking at start/stop, High slip braking, PID control (with sleep function), Energy saving control, MODBUS communication (RS-485 RJ45, max. 115.2 kbps), Fault restart, Parameter copy
Fan Control	230V model: VFD150C23A (include) and series above; PMW control; VFD150C23A and series below; on/off switch control 460V model: VFD150C23A (include) and series above; PMW control; VFD150C23A and series below; on/off switch control
Motor Protection	Electronic thermal relay protection
Over-current Protection	Over-current protection for 220% rated current current clamp "Normal duty: around 170-175%"; "Heavy duty: around 180-185%"
Over-voltage Protection	230: drive will stop when DC-BUS voltage exceeds 410V 460: drive will stop when DC-BUS voltage exceeds 820V
Over-temperature Protection	Built-in temperature sensor
Stall Prevention	Stall prevention during acceleration, deceleration and running independently.
Restart after Instantaneous Power Failure	Parameter setting up to 20 seconds
Grounding Leakage Current Protection	Leakage current is higher than 50% of rated current of the AC motor drive

Control Characteristics

Output Rating	HEAVY DUTY	370	450	550	750	900	1100	1320	1600	1850	2200	2800	3150
Output Rating	NORMAL DUTY	37	45	55	75	90	110	132	160	185	220	280	315
Output Rating	NORMAL DUTY	50	60	75	100	125	150	175	215	250	300	375	425
Output Rating	NORMAL DUTY	55	69	84	114	136	167	197	235	280	348	417	466
Output Rating	NORMAL DUTY	69	86	105	143	171	209	247	295	352	437	523	585
Output Rating	NORMAL DUTY	58	73	88	120	143	175	207	247	295	367	438	491
Output Rating	NORMAL DUTY	73	91	110	150	180	220	260	310	370	460	550	616
Output Rating	NORMAL DUTY	70	96	108	149	159	197	228	285	361	380	469	527
Output Rating	NORMAL DUTY	74	101	114	157	167	207	240	300	380	400	494	555
Output Rating	NORMAL DUTY	3-phase AC 380V-480V (-15%--+10%), 50/60Hz											
Output Rating	NORMAL DUTY	323-528Vac											
Output Rating	NORMAL DUTY	47-63Hz											
Output Rating	NORMAL DUTY	Fan cooling											
Output Rating	NORMAL DUTY	Option											
Output Rating	NORMAL DUTY	Built-in											
Output Rating	NORMAL DUTY	VFDXXX43A: without EMI filter VFDXXX43E: built-in EMI filter											


Protection Characteristics

Protection Characteristics	Motor Protection	Electronic thermal relay protection
Protection Characteristics	Over-current Protection	Over-current protection for 220% rated current current clamp "Normal duty: around 170-175%"; "Heavy duty: around 180-185%"
Protection Characteristics	Over-voltage Protection	230: drive will stop when DC-BUS voltage exceeds 410V 460: drive will stop when DC-BUS voltage exceeds 820V
Protection Characteristics	Over-temperature Protection	Built-in temperature sensor
Protection Characteristics	Stall Prevention	Stall prevention during acceleration, deceleration and running independently.
Protection Characteristics	Restart after Instantaneous Power Failure	Parameter setting up to 20 seconds
Protection Characteristics	Grounding Leakage Current Protection	Leakage current is higher than 50% of rated current of the AC motor drive

NOTE: F-H is under development.
 * For FRAME B and C, Model VFDXXX43A is under IP20/NEMA 1/UL TYPE1 protection level.
 * For FRAME D and above, if the last character of the model is A then it is under IP20 protection level but the wiring terminal is under IP00 protection level.
 * For FRAME D and above, if the last character of the model is B then it is under IP20 protection level but the wiring terminal is under IP00 protection level.
 * For FRAME D and above, if the last character of the model is C then it is under IP20 protection level but the wiring terminal is under IP00 protection level.

Wiring

Frame A-C
Offers 3-phase power supply

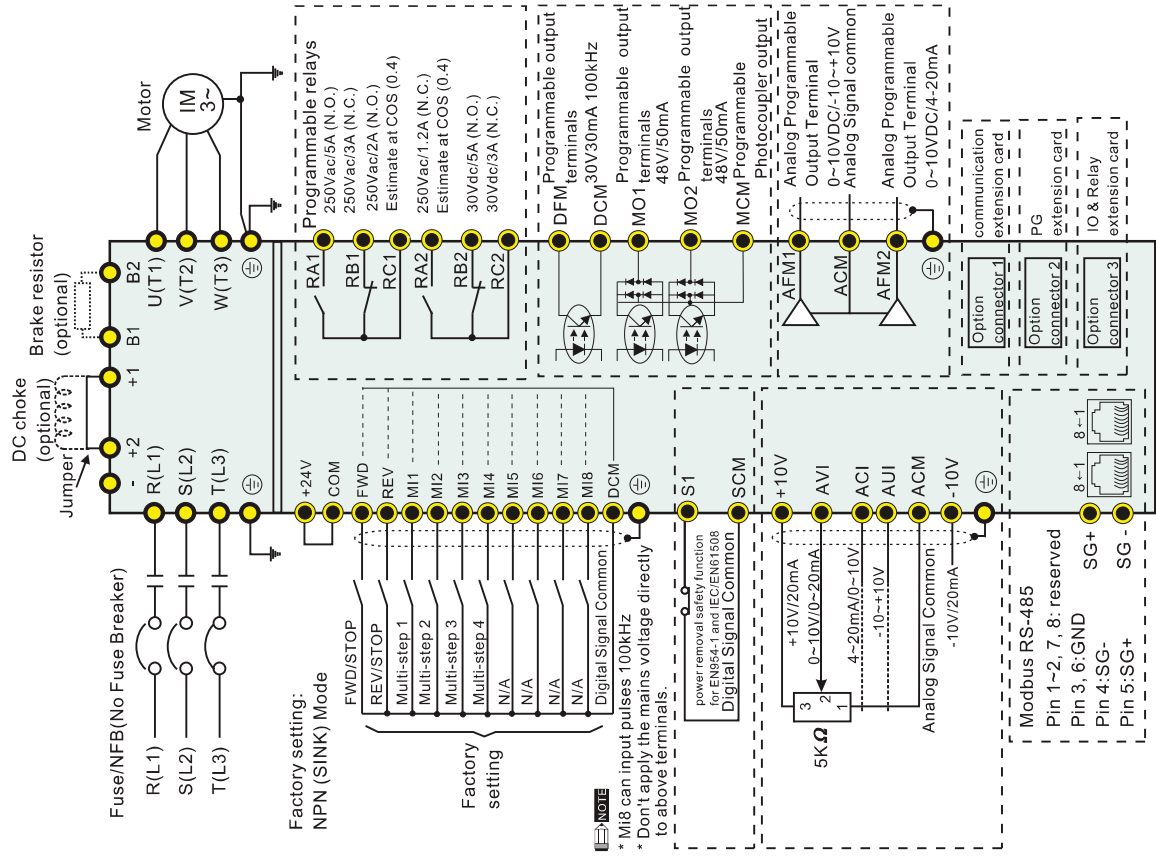


Main circuit (power) terminals
Control terminals

Shielded leads & Cable


Input power terminals for frame G and H
Provides 3-phase power

It provides 12-phase power

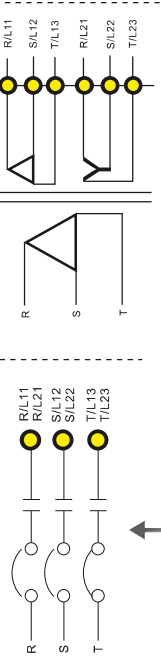

Wiring diagram for frame D and above

It provides 3-phase power

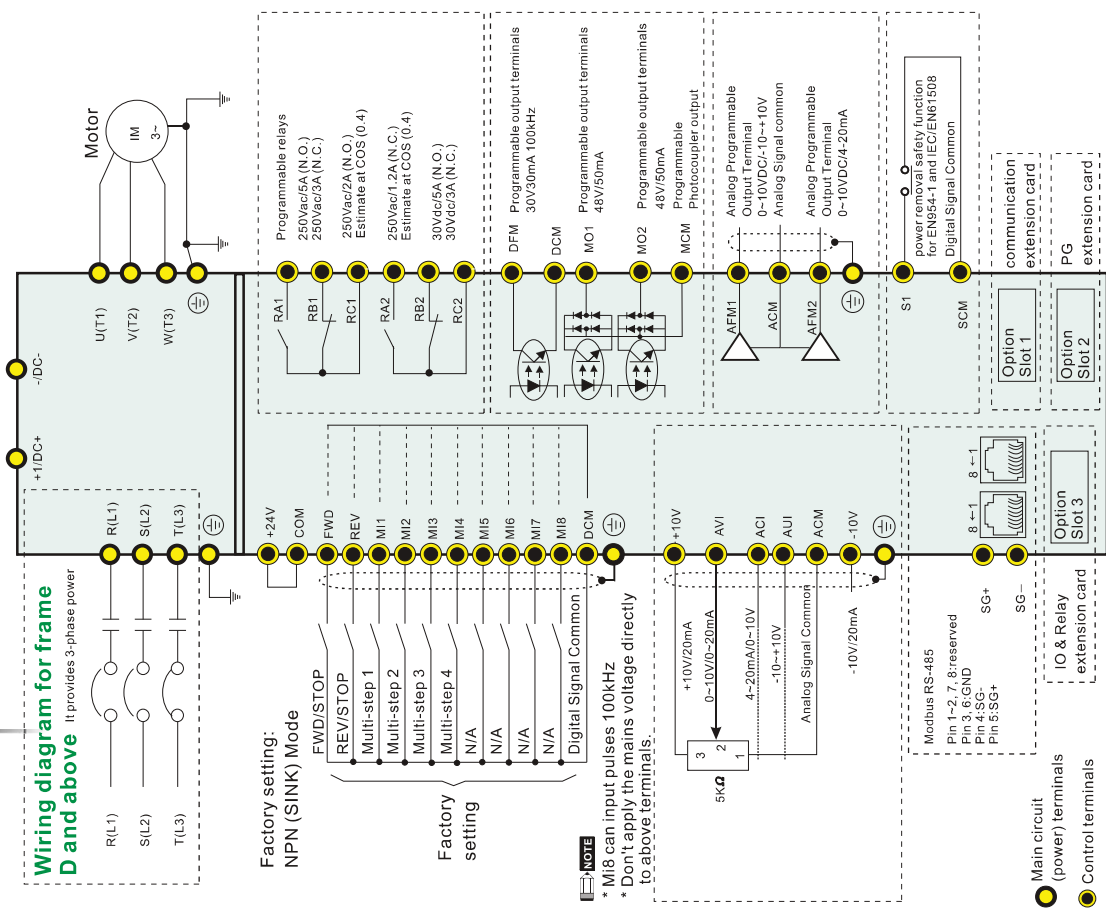

NOTE


M18 can input pulses 100kHz
* Don't apply the mains voltage directly to above terminals.

Main circuit (power) terminals
Control terminals

Shielded leads & Cable

■ Dimensions


■ Digital Keypad

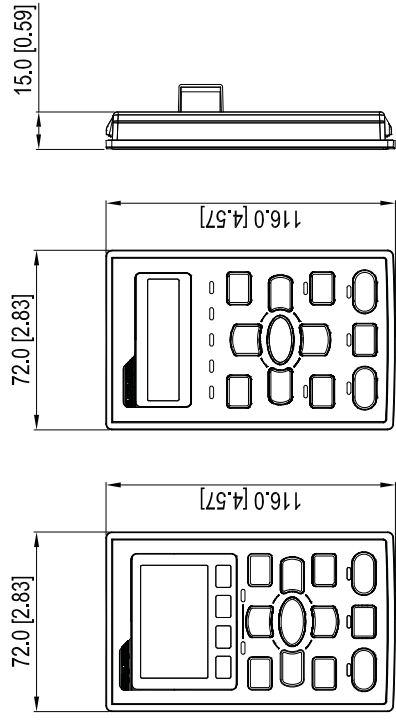

KPC-CC01

KPC-CE01

■ Frame A

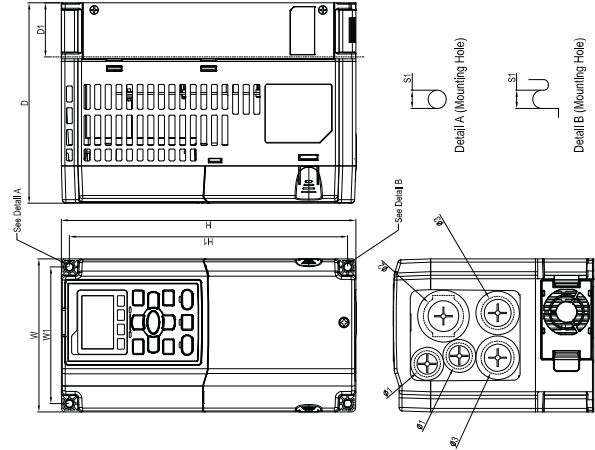


MODEL

- VFD007C23A
- VFD007C43A/43E
- VFD015C23A
- VFD015C43A/43E
- VFD022C23A
- VFD022C43A/43E
- VFD037C23A
- VFD037C43A/43E
- VFD040C43A/43E
- VFD055C43A/43E

Frame	W	H	D	W1	H1	D1*	Ø	Ø1	Ø2	Ø3	
A1	mm	130.0	250.0	170.0	116.0	236.0	45.8	6.2	22.2	34.0	28.0
	inch	5.12	9.84	6.69	4.57	9.29	1.80	0.24	0.87	1.34	1.10

NOTE: Model VFD007C43E, VFD015C43E, VFD022C43E, VFD037C43E, VFD040C43E, VFD055C43E will be available for ordering soon. Please contact your local distributor or Delta representative for detailed launch schedule.

■ Frame B

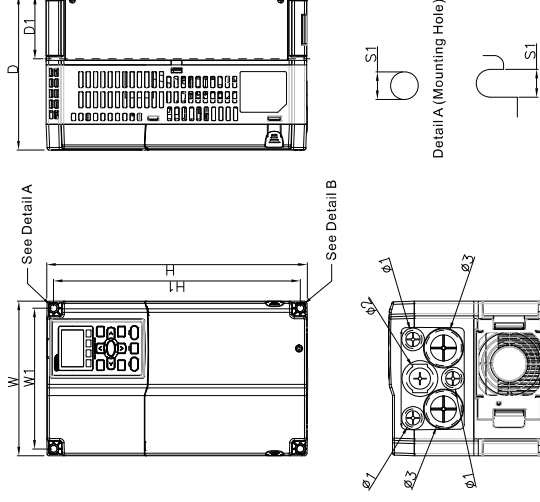


MODEL

- VFD055C23A
- VFD075C23A
- VFD075C43A/43E
- VFD110C23A
- VFD110C43A/43E
- VFD150C43A/43E

Frame	W	H	D	W1	H1	D1*	S1	Ø1	Ø2	Ø3
B1	mm	190.0	320.0	190.0	303.0	77.9	8.5	22.2	34.0	28.0
	inch	7.48	12.60	7.48	11.93	3.07	0.33	0.87	1.34	1.10

NOTE: Model VFD075C43E, VFD110C43E, VFD150C43E will be available for ordering soon. Please contact your local distributor or Delta representative for detailed launch schedule.

■ Frame C

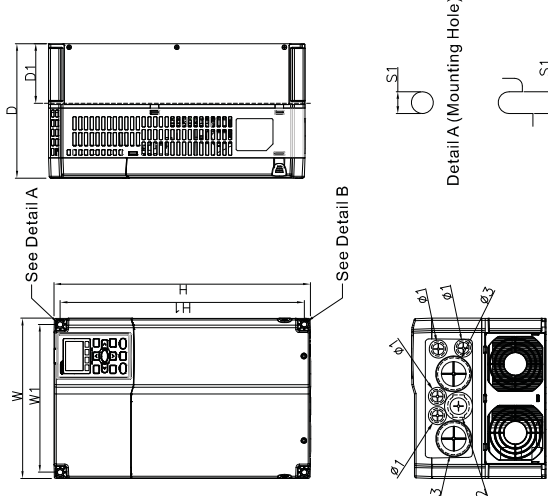

MODEL


- VFD150C23A
- VFD185C23A
- VFD185C43A/43E
- VFD220C23A
- VFD220C43A/43E
- VFD300C43A/43E

Frame	W	H	D	W1	H1	D1*	S1	Ø1	Ø2	Ø3
C1	mm	250.0	400.0	210.0	231.0	381.0	92.9	8.5	22.2	34.0
	inch	9.84	15.75	8.27	9.09	15.00	3.66	0.33	0.87	1.34

NOTE: Model VFD185C43E, VFD220C43E, VFD300C43E will be available for ordering soon. Please contact your local distributor or Delta representative for detailed launch schedule.



■ Dimensions

■ Frame D

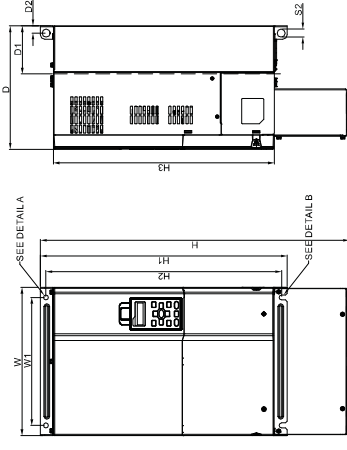

MODEL


- FRAME_D1
- VFD300C23A
- VFD300C23E
- VFD370C23A
- VFD370C23E
- VFD370C43A
- VFD370C43E
- VFD450C43A
- VFD450C43E
- VFD500C43A
- VFD500C43E
- VFD750C43A
- VFD750C43E



Frame	W	H	D	W1	H1	H2	H3	D1*	D2	S1	S2	Ø1	Ø2	Ø3
D1	330.0 [12.99]	-	275.0 [10.83]	285.0 [11.22]	550.0 [21.65]	482.0 [19.37]	422.0 [16.61]	107.2 [4.22]	16.0 [0.63]	11.0 [0.43]	18.0 [0.71]	-	-	-
D2	330.0 [12.99]	688.3 [27.10]	275.0 [10.83]	285.0 [11.22]	550.0 [21.65]	492.0 [19.37]	422.0 [16.61]	107.2 [4.22]	16.0 [0.63]	11.0 [0.43]	18.0 [0.71]	34.0 [1.34]	22.0 [0.87]	-



Unit : mm[inch]

■ Frame E

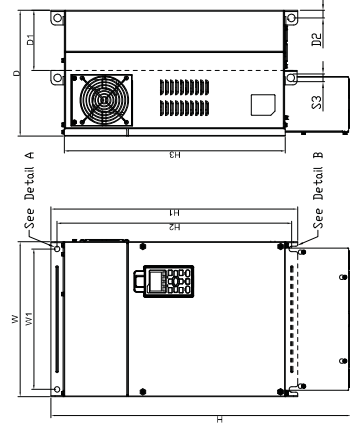

MODEL




- FRAME_E1
- VFD450C23A
- VFD450C23E
- VFD550C23A
- VFD550C23E
- VFD750C23A
- VFD750C23E
- VFD900C43A
- VFD900C43E
- VFD1100C43A
- VFD1100C43E



Frame	W	H	D	W1	H1	H2	H3	D1*	D2	S1,S2	S3	Ø1	Ø2	Ø3
E1	370.0 [14.57]	-	300.0 [11.81]	335.0 [13.19]	589 [23.19]	580.0 [22.05]	528.0 [20.80]	143.0 [5.63]	18.0 [0.71]	13.0 [0.51]	18.0 [0.71]	-	-	-
E2	370.0 [14.57]	745.8 [28.18]	300.0 [11.81]	335.0 [13.19]	589 [23.19]	580.0 [22.05]	528.0 [20.80]	143.0 [5.63]	18.0 [0.71]	13.0 [0.51]	18.0 [0.71]	34.0 [1.34]	22.0 [0.87]	36.0 [1.42]

Unit : mm[inch]

■ Frame F

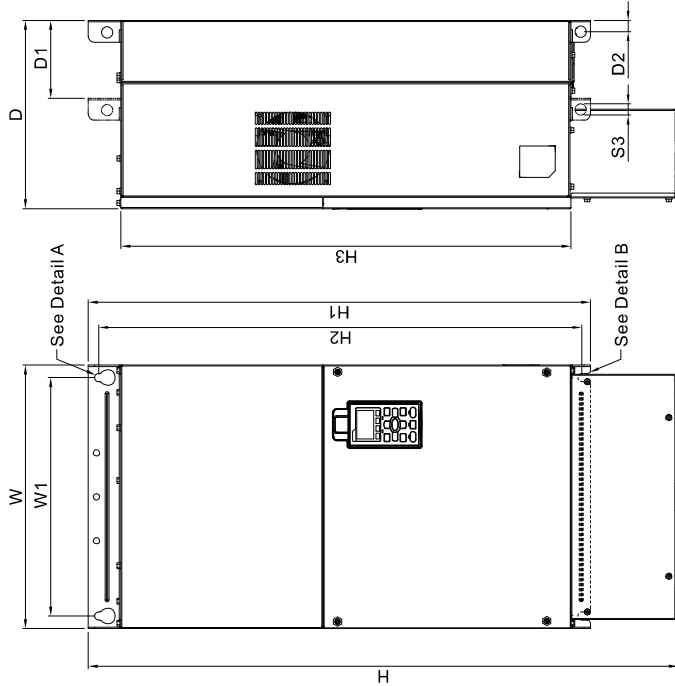

MODEL

- FRAME_F2
- VFD900C23E
- VFD1320C43E
- VFD1600C43E




Frame	W	H	D	W1
F1	420.0 [16.54]	-	300.0 [11.81]	380.0 [14.96]
F2	420.0 [16.54]	940.0 [37.00]	300.0 [11.81]	380.0 [14.96]

Frame	W	H	D	W1	H1	H2	H3	D1*	D2	S1	S2	S3	Ø1	Ø2	Ø3
F1	800.0 [31.50]	770.0 [30.32]	717.0 [28.23]	124.0 [4.88]	18.0 [0.71]	13.0 [0.51]	25.0 [0.98]	18.0 [0.71]	18.0 [0.71]	13.0 [0.51]	18.0 [0.71]	35.0 [1.38]	22.0 [0.87]	-	-
F2	800.0 [31.50]	770.0 [30.32]	717.0 [28.23]	124.0 [4.88]	18.0 [0.71]	13.0 [0.51]	25.0 [0.98]	18.0 [0.71]	18.0 [0.71]	13.0 [0.51]	18.0 [0.71]	35.0 [1.38]	22.0 [0.87]	22.0 [0.87]	22.0 [0.87]

Unit : mm[inch]

■ Dimensions

■ Frame G

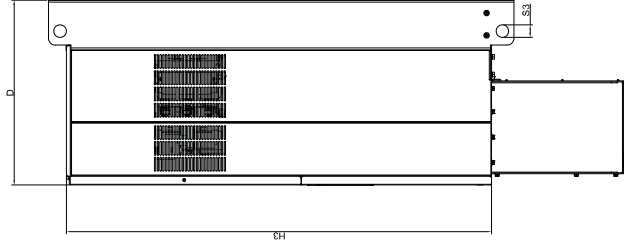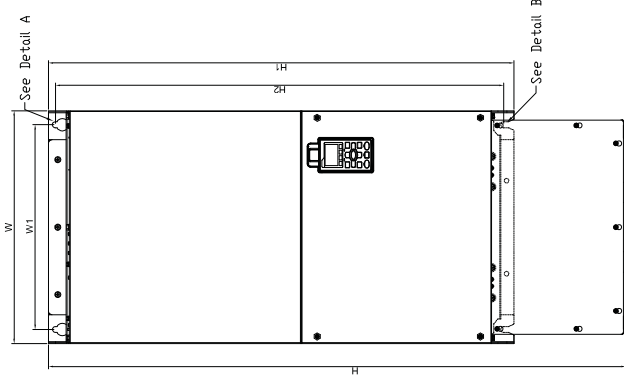

Detail A (Mounting Hole)

Detail B (Mounting Hole)

MODEL




FRAME G1	FRAME G2
VFD1850C43A	VFD1850C43E
VFD2200C43A	VFD2200C43E

Frame	W	H	D
G1	500.0 [19.69]	-	397.0 [15.63]
G2	500.0 [19.69]	1240.2 [48.83]	397.0 [15.63]

Unit : mm[inch]

Frame	W1	H1	H2	H3	S1	S2	S3	Ø1	Ø2	Ø3
G1	440.0 [17.32]	1000.0 [39.37]	963.0 [37.91]	913.6 [35.97]	13.0 [0.51]	26.5 [1.04]	27.0 [1.06]	-	-	-
G2	440.0 [17.32]	1000.0 [39.37]	963.0 [37.91]	913.6 [35.97]	13.0 [0.51]	26.5 [1.04]	27.0 [1.06]	22.0 [0.87]	34.0 [1.34]	117.5 [4.63]

■ Frame H

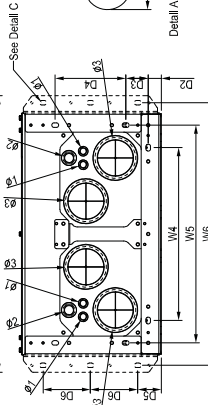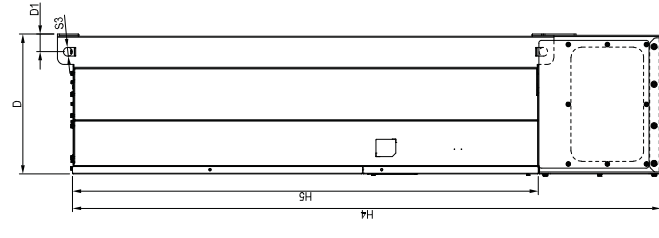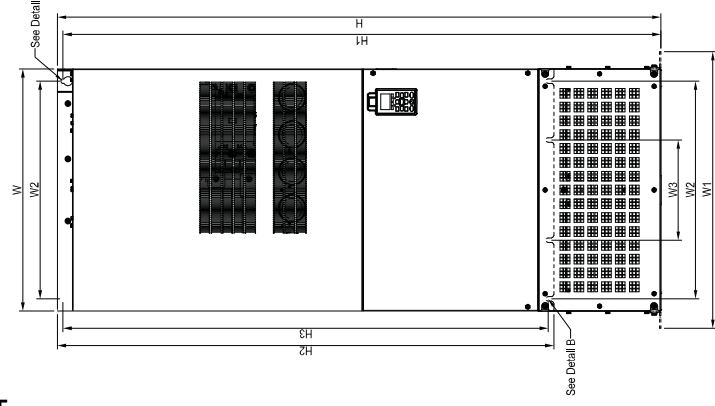

Detail A (Mounting Hole)

Detail B (Mounting Hole)

Detail C (Mounting Hole)

MODEL

FRAME H1	FRAME H2	FRAME H3
VFD2800C43A	VFD2800C43E-1	VFD2800C43E
VFD3150C43A	VFD3150C43E-1	VFD3150C43E
VFD3550C43A	VFD3550C43E-1	VFD3550C43E

Unit : mm[inch]

Frame	W	H	D	W1	W2	W3	W4	W5	W6	H1	H2	H3	H4
H1	700.0 [27.56]	-	398.0 [15.67]	-	630.0 [24.80]	290.0 [11.42]	-	-	-	-	1435.0 [56.50]	1403.0 [55.24]	-
H2	700.0 [27.56]	1745.0 [68.70]	404.0 [15.91]	800.0 [31.50]	-	-	500.0 [19.69]	630.0 [24.80]	760.0 [29.92]	1729.0 [68.07]	-	-	1701.6 [66.99]
H3	700.0 [27.56]	1745.0 [68.70]	404.0 [15.91]	800.0 [31.50]	-	-	500.0 [19.69]	630.0 [24.80]	760.0 [29.92]	1729.0 [68.07]	-	-	1701.6 [66.99]


Unit : mm[inch]

Frame	H5	D1	D2	D3	D4	D5	D6	S1	S2	S3	Ø1	Ø2	Ø3
H1	1346.6 [53.02]	45.0 [1.77]	-	-	-	-	-	13.0 [0.51]	26.5 [1.04]	25.0 [0.98]	-	-	-
H2	1346.6 [53.02]	51.0 [2.01]	38.0 [1.50]	65.0 [2.56]	204.0 [8.03]	68.0 [2.68]	137.0 [5.39]	13.0 [0.51]	26.5 [1.04]	25.0 [0.98]	-	-	-
H3	1346.6 [53.02]	51.0 [2.01]	38.0 [1.50]	65.0 [2.56]	204.0 [8.03]	68.0 [2.68]	137.0 [5.39]	13.0 [0.51]	26.5 [1.04]	25.0 [0.98]	22.0 [0.87]	34.0 [1.34]	117.5 [4.63]

Option Cards

EMC-D42A

Terminals	Descriptions
COM	Common for multi-function input terminals Select SINK (NPN) /SOURCE (PNP) in J1 jumper / external power supply
M110- M113	Refer to parameters 02-26-02-29 to program the multi-function inputs M110-M113. Internal power is applied from terminal E24: +24Vdc±5%, 200mA, 5W External power +24Vdc: max. voltage 30Vdc, min. voltage 18Vdc, 30W ON: the activation current is 6.5mA OFF: leakage current tolerance is 10µA
I/O Extension Card	Multi-function output terminals (photocoupler) Duty-cycle: 50% Max. output frequency: 100Hz Max. current: 50mA Max. voltage: 48Vdc
MXM	Common for multi-function output terminals MO10, MO11 (photocoupler) Max. 48Vdc 50mA



EMC-D611A

Terminals	Descriptions
AC	AC power common for multi-function input terminal (Neutral)
M110- M115	Refer to Pr. 02-26- Pr. 02-31 for multi-function input selection Input voltage: 100-130VAC Input frequency: 57-63Hz Input impedance: 27Kohm Terminal response time: ON: 10µs OFF: 20ms
I/O Extension Card	



EMC-R6AA

Terminals	Descriptions
R10A-R15A R10C-R15C	Refer to Pr. 02-36- Pr. 02-41 for multi-function input selection Resistive load: 5A(N.O.)/3A(N.C.) 250VAC 5A(N.O.)/3A(N.C.) 30Vdc Inductive load (COS 0.4) 2.0A(N.O.)/1.2A(N.C.) 250VAC 2.0A(N.O.)/1.2A(N.C.) 30Vdc It is used to output each monitor signal, such as for drive in operation, frequency attained or overload indication.
Relay Extension Card	



EMC-PG01L

Terminals	Descriptions
VP	Output voltage for power: +5V/+12V±5% (use FSW3 to switch +5V/+12V) Max. output current: 200mA
DCM	Common for power and signal
A1, /A1 B1, /B1 Z1, /Z1	Encoder Input signal It can be 1-phase or 2-phase input. Max. output frequency: 300kP/sec
A2, /A2 B2, /B2	Pulse Input signal It can be 1-phase or 2-phase input. Max. output frequency: 300kP/sec.
AO, /AO BO, /BO ZO, /ZO	PG Card Output signals. It has division frequency function: 1~255 times Max. output voltage for Line driver: 5Vdc Max. output current: 50mA Max. output frequency: 300kP/sec
Set by Pr.10-00~10-02	



EMC-PG01O

Terminals	Descriptions
VP	Output voltage for power: +5V/+12V±5% (use FSW3 to switch +5V/+12V) Max. output current: 200mA
DCM	Common for power and signal
A1, /A1 B1, /B1 Z1, /Z1	Encoder Input signal It can be 1-phase or 2-phase input. Max. output frequency: 300kP/sec
A2, /A2 B2, /B2	Pulse Input Signal It can be 1-phase or 2-phase input. Max. output frequency: 300kP/sec.
V+	Needs external power source for PG OUT circuit.
V-	Input voltage of power: +12V ~ +24V
A/O, B/O, /O	PG Card Output signals. It has division frequency function: 1~255 times Input signal of open collector. Please add a pull-high resistor on the external power V+~V- (e.g. power of PLC) to prevent the interference of the receiving signal. Max. Output current: 20mA. Max output frequency: 300kP/Sec
Set by Pr.10-00~10-02	



EMC-PG01R

Terminals	Descriptions
R1-R2	Resolver Output Power 7Vrms, 10kHz
S1, S2, S3, S4,	Resolver Input Signal 3.5±0.175Vrms, 10kHz
A2, /A2 B2, /B2	Pulse Input Signal It can be 1-phase or 2-phase input. Max. output frequency: 300kP/sec.
AO, /AO, BO /BO, ZO, /ZO	PG Card Output signals. It has division frequency function: 1~255 times Max. output voltage for Line driver: 5Vdc Max. output current: 50mA Max. output frequency: 300kP/sec
Set by Pr.10-00~10-02	



Screw Specifications for Option card Terminals:

EMC-D42A	Wire gauge	24~12AWG (0.205~3.31mm ²)
	Torque	4Kg-cm [3.47lb-in]
EMC-R6AA	Wire gauge	24~16AWG (0.205~1.31mm ²)
	Torque	6Kg-cm [5.21lb-in]
EMC-PG01L		
EMC-PG01O	Wire gauge	30~16AWG (0.0509~1.31mm ²)
EMC-PG01R	Torque	2Kg-cm [1.74lb-in]
EMC-PG01U		

Option Cards

EMC-PG01U

- **FJMP1[S]**: Standard UVW Output Encoder; **D**: Delta Encoder
- Set by Pr.10-00~10-02



Terminals	Descriptions
VP	Output voltage for power; +5V/+12V/5% (use FSW3 to switch +5V/+12V) Max. output current: 200mA
PG1	DCM Common for power and signal
	A1, /A1, B1, /B1, Z1, /Z1 Encoder input signal 1-phase or 2-phase input. Max. output frequency: 300kP/sec
PG2	U1, /U1, V1, /V1, W1, /W1 Encoder input signal
	A2, /A2, B2, /B2 Pulse Input signal 1-phase or 2-phase input. Max. output frequency: 300kP/sec.
PG OUT	PG Card Output signals. Division frequency function: 1~255 times Max. output voltage for Line driver: 5Vdc Max. output current: 50mA Max. output frequency: 300kP/sec

CMC-MOD01



Features

- MDI/MDI-X auto-detect
- Virtual serial port.
- Supports Modbus TCP protocol
- AC motor drive keypad/Ethernet configuration

Network Interface

Interface	RJ-45 with Auto MDI/MDIX
Number of ports	1 Port
Transmission method	IEEE 802.3, IEEE 802.3u
Transmission cable	Category 5e shielding 100M
Transmission speed	10/100 Mbps Auto-Detect
Network protocol	ICMP, IP, TCP, UDP, DHCP, SMTP, MODBUS OVER TCP/IP, Delta Configuration

CMC-EIP01



Features

- MDI/MDI-X auto-detect
- Supports Modbus TCP and Ethernet/IP protocol
- Baud rate: 10/100Mbps auto-detect
- AC motor drive keypad/Ethernet configuration

Network Interface

Interface	RJ-45 with Auto MDI/MDIX
Number of ports	1 Port
Transmission method	IEEE 802.3, IEEE 802.3u
Transmission cable	Category 5e shielding 100M
Transmission speed	10/100 Mbps Auto-Detect
Network protocol	ICMP, IP, TCP, UDP, DHCP, HTTP, SMTP, MODBUS OVER TCP/IP, EtherNet/IP, Delta Configuration

CMC-PD01



Features

- Supports PZD control data exchange.
- Supports PKW polling AC motor drive parameters.
- Supports user diagnosis function.
- Auto-detects baud rates; supports Max. 12Mbps.

PROFIBUS DP Connector

Interface	DB9 connector
Transmission method	High-speed RS-485
Transmission cable	Shielded twisted pair cable
Electrical isolation	500VDC

Communication

Message type	Cyclic data exchange
Module name	CMC-PD01
GSD document	DELA08DB.GSD
Company ID	08DB (HEX)
Serial transmission speed supported (auto-detection)	9.6kbps; 19.2kbps; 93.75kbps; 187.5kbps; 125kbps; 250kbps; 500kbps; 1.5Mbps; 3Mbps; 6Mbps; 12Mbps (bits per second)

CMC-DN01



Features

- Based on the high-speed communication interface of Delta HSSP protocol, able to conduct immediate control of AC motor drive.
- Supports Group 2 only connection and polling I/O data exchange.
- For I/O mapping, supports Max. 32 words of input and 32 words of output.
- Supports EDS file configuration in DeviceNet configuration software.
- Supports all baud rates on DeviceNet bus: 125kbps, 250kbps, 500kbps and extendable serial transmission speed mode.
- Node address and serial transmission speed can be set up on AC motor drive.
- Power supplied from AC motor drive.

DeviceNet Connector

Interface	5-PIN open removable connector. Of 5.08mm PIN interval
Transmission method	CAN
Transmission cable	Shielded twisted pair cable (with 2 power cables)
Transmission speed	125kbps, 250kbps, 500kbps and extendable serial transmission speed mode
Network protocol	DeviceNet protocol

AC Motor Drive Connection Port


Interface	50 PIN communication terminal
Transmission method	SPI communication
Terminal function	1. Communicating with AC motor drive 2. Transmitting power supply from AC motor drive
Communication protocol	Delta HSSP protocol

Option Cards

EMC-COP01



RJ-45 Pin definition




Specification

Interface	RJ-45
Number of ports	1 Port
Transmission method	CAN
Transmission cable	CAN standard cable
Transmission speed	1M 500k 250k 125k 100k 50k
Communication protocol	CANopen

CANopen Communication Cable


Model: TAP-CB03, TAP-CB04



Title	Part No.	mm	inch
1	TAP-CB03	500 ± 10	19 ± 0.4
2	TAP-CB04	1000 ± 10	39 ± 0.4

CANopen Dimensions

Model: TAP-CN03

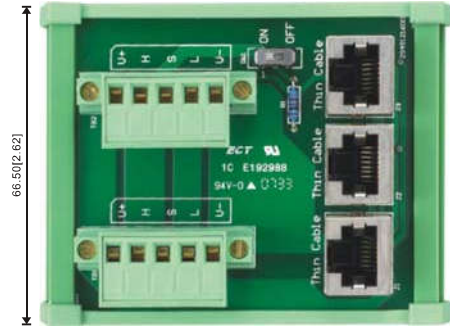


Ordering information

Frame A	230V: 0.75-3.7kW (1-5HP) 460V: 0.75-5.5kW (1-7.5HP)	VFD007C23A VFD007C43A/E VFD015C43A/E VFD037C43A/E VFD040C43A/E VFD055C43A/E VFD015C23A/E VFD022C23A/E VFD022C43A/E
Frame B	230V: 5.5-11kW (7.5-15HP) 460V: 7.5-15 kW (10-20HP)	VFD055C23A VFD075C23A VFD110C23A/E VFD075C43A/E VFD110C43A/E VFD150C43A/E
Frame C	230V: 15-22 kW (20-30HP) 460V: 18.5-30 kW (25-40HP)	VFD150C23A VFD185C23A VFD220C23A VFD185C43A/E VFD220C43A/E VFD300C43A/E
Frame D	230V: 30-37 kW (40-50HP) 460V: 37-75 kW (50-100HP)	VFD300C23A VFD370C23A VFD370C43A VFD450C43A VFD550C43A VFD750C43A VFD300C23E VFD370C23E VFD370C43E VFD450C43E VFD550C43E VFD750C43E
Frame E	230V: 45-55 kW (60-75HP) 460V: 90-110 kW (125-150HP)	VFD450C23A/E VFD550C23A/E VFD900C43A/E VFD110C43A/E VFD750C23A/E
Frame F	230V: 75-90 kW (100-125HP) 460V: 132-160 kW (175-215HP)	VFD900C23A/E VFD1320C43A/E VFD1600C43A/E
Frame G	460V: 185-220 kW (250-300HP)	VFD1850C43A/E VFD2200C43A/E
Frame H	460V: 280-355 kW (375-475HP)	VFD2800C43A/E VFD3150C43A/E VFD3550C43A/E

Nameplate

AC Drive Model → MODEL: VFD007C43A
 Input Voltage/Current → INPUT: 3PH 480V 50/60Hz 4.8A
 Normal Duty / Heavy Duty → 3PH 480V 400/600Hz 4.1A
 Output Voltage/Current → OUTPUT: Normal Duty: 3PH 0-480V 3A 2.4kVA 1HP
 Heavy Duty: 3PH 0-480V 2.9A 2.3kVA 1HP
 Frequency Ranges → FREQUENCY RANGE: Normal Duty: 0-600Hz
 Heavy Duty: 0-300Hz
 Firmware Version → Version: Vx.XX
 Certifications →
 Enclosure rating (IPXX) →
 Serial Number → 007C43A7T9300002
 DELTA ELECTRONICS, INC.
 MADE IN TAIWAN

Model name

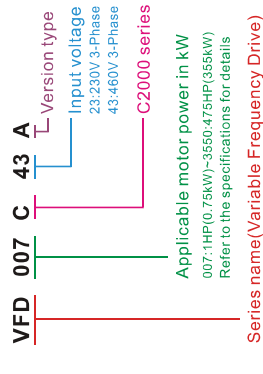

Optional Accessories

- Digital Keypad KPC-0E01
- Option Cards
- Fuse
- Non-fuse Circuit Breaker
- All Brake Resistors and Brake Units Used in AC Motor Drives
- AC Reactor
- Zero Phase Reactor
- DC Reactor
- EMI Filter
- Panel Mounting
- Conduit Box Kit
- Fan Kit
- Flange Mounting Kit



Attention

Standard Motors

- **Used with 400V Standard Motors**
To be used only with the C-2000 Carrier when using with a 400V standard motor to prevent damage to motor installation.

Temperature Rise

- When a standard motor is drive controlled, the motor temperature will be higher than with DOL operation.
Please reduce the motor output torque when operating at low speeds to compensate for less cooling efficiency.
For continuous constant torque at low speeds, external forced motor cooling is recommended.

Vibration

- When the motor drives the machine, resonances may occur, including machine resonances.
Abnormal vibration may occur when operating a 2-pole motor at 60Hz or higher.

Noise

- When a standard motor is drive controlled, the noise will be higher than with DOL operation.
To lower the noise, please increase the carrier frequency of the drive. The motor fan can be very noisy when the motor speed exceeds 60Hz.

Special Motors

- **High-speed Motor**
To ensure safety, please try the frequency setting with another motor before operating the high-speed motor at 120Hz or higher.
- **Explosion-proof Motor**
Please use a motor and drive that comply with explosion-proof requirements.
- **Submersible Motor & Pump**
Rated current is higher than that of a standard motor.
Please check before operation and select the capacity of the AC motor drive carefully.
The motor temperature characteristics differ from a standard motor; please set the motor thermal time constant to a lower value.

Brake Motor

- When equipped with a mechanical brake, the brake should be powered by the mains supply.
Damage may occur when the brake is powered by the drive output. Please DO NOT drive the motor with the brake engaged.

Gear Motor

- When equipped with a gear motor, the gear motor or reduction gears, lubrication may be required for the gear. Please refer to the manual for details.
Please DO NOT operate in this way.

Synchronous Motor

- These of motors need suitable software to control them. Please contact Delta for more information.

Single-phase Motor

- Single-phase motors are not suitable for being operated by an AC Motor Drive. Please use a 3-phase motor instead when necessary.

Environmental Conditions

Installation Position

1. The drive is suitable for installation in a place with ambient temperature from -10 to 50°C.
2. The surface temperature of the drive and brake resistor will rise under specific operation conditions. Therefore, please install the drive on materials that are noncombustible.
3. Ensure that the installation site complies with the ambient conditions as stated in the manual.

Wiring

- **Limit of Wiring Distance**
For the remote operation, please use twist-shielding cable and the distance between the drive and control box should be less than 20m.
- **Maximum Motor Cable Length**
Motor cables that are too long may cause overheating of the drive or current peaks due to stray capacitance.
Please ensure that the motor cable is less than 100m.
If the cable length can't be reduced, please lower the carrier frequency or use an AC reactor.
- **Choose the Right Cable**
Please refer to current value to choose the right cable section with enough capacity or use recommended cables.

Grounding

- Please ground the drive completely by using the grounding terminal.

How to Choose the Drive Capacity

- **Standard Motor**
Please select the drive according to applicable motor rated current listed in the drive specification.
Please select the next higher power AC drive in case higher starting torque or quick acceleration/deceleration is needed.
- **Special Motor**
Rated current of the drive > rated current of the motor

Transportation and Storage

- Please transport and store the drive in a place that meets environment specifications.

Peripheral Equipment

Molded-Case Circuit Breakers (MCCB)

- Please install the recommended MCCB or ELCB in the main circuit of the drive and make sure that the capacity of the breaker is equal to or lower than the recommended one.

Add a Magnetic Contactor (MC) in the Output Circuit

- When a MC is installed in the output circuit of the drive to switch the motor to commercial power or other purposes, please make sure that the drive and motor are completely stopped and remove the surge absorbers from the MC before switching it.

Add a Magnetic Contactor (MC) in the Input Circuit

- Please only switch the MC ONCE per hour or it may damage the drive. Please use RUN/STOP signal to switch many times during motor operation.

Motor Protection

- The thermal protection function of the drive can be used to protect the motor by setting the operation level and motor type (standard motor or variable motor).
When using a high-speed motor or a water-cooled motor the thermal time constant should be set to a lower value.

- When using a lower cable to connect the motor thermal relay to a motor, high frequency currents may enter via the stray capacitance. It may result in malfunctioning of the relay as the real current is lower than the setting of thermal relay. Under this condition, please lower the carrier frequency or add an AC reactor to solve this.

DO NOT Use Capacitors to Improve the Power Factor

- Use a DC reactor to improve the power factor of the drive. Please DO NOT install power factor correction capacitors on the main circuit of the drive to prevent motor faults due to over current.

Do NOT Use Surge Absorber

- Please DO NOT install surge absorbers on the output circuit of the drive.

Lower the Noise

- To ensure compliance with EMC regulations, usually a filter and shielded wiring is used to lower the noise.

Method Used to Reduce the Surge Current

- Surge currents may occur in the phase-lead capacitor of the power system, causing an overvoltage when the drive is stopped or at low loads.

- It is recommended to add a DC reactor to the drive.