



**AUDIO SYSTEMS**

# Rack mount Mixer Power Amplifiers

## EA-60AD/120AD/240AD/350AD/500AD



### Features:

- Desktop or 19" rack mount
- Available in 60W / 120W / 240W / 350W / 500W
- Built-in 100V / 70V transformer technology
- Speaker output of 100V / 70V or 4 / 8 / 16 Ohms
- MP3 player with USB/SD input + IR remote
- Bluetooth capability
- DAB+ and FM radio tuner
- LED indicators for power, clip, protect and signal
- Short-circuit, clip, overload and high temperature protection
- AC220V or 115V & 24V DC operation



# Rack mount mixer power amplifiers


## EA-60AD/120AD/240AD/350AD/500AD



### Specifications:

Model	EA-60AD	EA-120AD	EA-240AD	EA-350AD	EA-500AD
Description	Mixer Amplifier with USB/SD & FM & Bluetooth, DAB+				
Rated Power Output	60W	120W	240W	350W	500W
Speaker Outputs	100V or 70V & 4-16Ω				
Connector	Mic1 input by balanced XLR with +48V phantom power Input2-3 inputs Mic/Line switchable unbalanced 6.3mm jack Line1-2 inputs by RCA, Line output by RCA				
Input	MIC1-3: 5-8mV, 600Ω; Line, 150-470mV, 10KΩ, unbalanced RCA				
Line Out	0.775(0dBV)				
Frequency Response	60Hz-15kHz(±3dB)				
S/N Ratio	Line ≥ 85dB, Mic ≥ 72dB				
THD	Less than 0.5%				
Protection	short-circuit, clip, overload and high temp protection				
Power Consumption	80W	150W	310W	450W	650W
Power Supply	230V AC; 50-60Hz				
Dimension	484×335×88mm				
Weight	6.1kg	6.6kg	9.6kg	11.9kg	13.7kg

### Rear Panel:

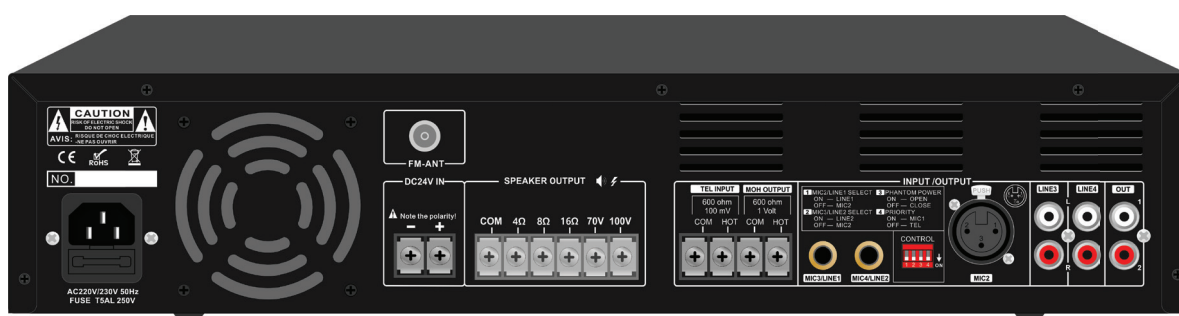

Specifications subject to change without notice.