



IS310

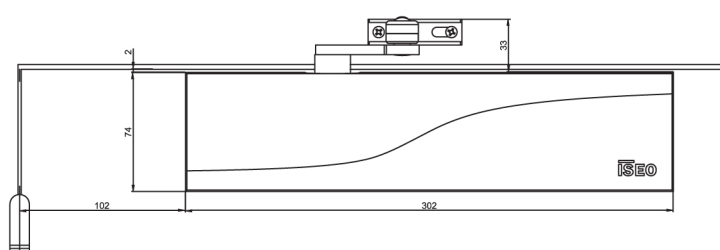

Technical drawings available in the instruction manual

Application field:

- For internal doors and doors opening outwards
- For single action door
- Non-handed for mounting on door or on frame (right or left opening)
- For fire resistance door and smoke proof door
- For every type of door set material (wood, aluminium, steel, etc.)
- Door width max. 1400 mm
- Door weight max. 160 kg.

Versions/accessories:

- Standard colours: silver, white and black.
- Accessories:
 - Parallel arm bracket (PAB) installation opposite hinges with the body on the door. Equip with a standard door closer. The force changes from 2 to 5.
 - Mounting plate.

Features:

- Full cover with new design ISEO protecting every adjustment valves.
- Closing and opening speed adjustable by valves present on the front of the device allowing an easy adjustment.
- Door closer with delayed closing action as standard, adjustable by valve, to allow a delayed closing time as by customer needs. Useful for buildings where a longer passage through the doorway is required (for persons and goods).
- Door closer with backcheck as standard, adjustable by valve, for outwards opening doors ensuring a controlled opening to protect door and wall against wind effect.
- Concealed fixing.
- Low resistance during door opening.
- Closing time adjustment steady and reliable.
- 2 years warranty.