




KEY SAFE



en User manual

BURG-WÄCHTER KG
Altenhofer Weg 15
58300 Wetter
Germany

BA Key Safe dp 05/2014

www.burg-wachter.com

Dear customer,

Thank you very much for deciding for a KEY SAFE manufactured by BURG-WÄCHTER. The KEY SAFE permits a reliable storage of keys and /or other valuables.

Important: Please read the entire User Manual before you start to mount the device and before resetting.

Let us wish you a high level of security and quality of living with your KEY SAFE


your BURG-WÄCHTER

To Open

Rotate all 4 dials to the pre-set combination, grasp the sides on the top section of the box and pull lid towards you.

Resetting Combination

1. Open the KEY SAFE using the secret number (the factory preset is " 0 - 0 - 0 - 0 ").

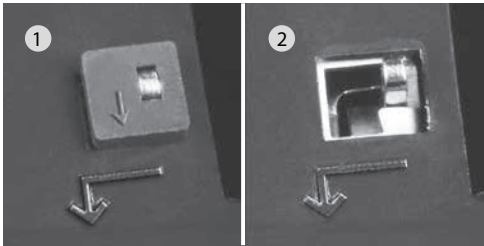

2. Remove the small black cap which is located around the silver pin on the inside of the box. see Fig 1.
3. Slide the reset pin to the left and down as per arrow (Fig 2) (Lid should be opened toward you with the hinge at the bottom).
4. Rotate the 4 dials on the front to your new secret combination. Ensure the numbers are positioned centrally and have clicked into position.

Attention: If the code gets lost the opening of the KEY SAFE is impossible.

5. Return the reset pin to the original position (up and to the right, in the opposite direction of arrow).

6. Re-insert the black cap around the silver pin. (The cap will be flush with pin when fitted correctly) see Fig 1.
7. Close the lid and check the operation of the box using the new combination.

To lock

The combination must be scrambled by rotating the 4 dials.

Fitting Instructions

Attention: Depending on different types of walls and floors special dowels are recommended to increase the effectiveness of anchoring.

The box should be mounted on to a solid wall using all 4 corner holes on the back plate.

Wall plugs should be used for masonry and brick walls. Use a Ø 8 mm drill for the holes and put in the anchors. Now fix the KEY Safe with the screws on the wall

The KEY SAFE should be mounted in a discreet location for maximum protection and in an area with sufficient light for authorised users to see the dials.

Maintenance:

It is recommended the dials are rotated weekly to keep them moving freely.

Errors and changes reserved.