



HEAVY DUTY TAILORED CAR SEAT COVERS

Dear Customer,

Your covers are custom-made and tailored to fit your exact vehicle. As opposed to universal covers, the fit should be tight and snug, and fitting times will vary depending on your vehicle. It is advisable to allow up to 45 minutes to install these. If your covers initially appear ill-fitting, don't be afraid to push/pull the cover to fit the contours. Ensure all ties, latch hole provisions or gaps for armrests (if applicable) are fitted correctly.

Please refer to the fitting instructions overleaf.

GETTING IN TOUCH

If you have any questions, or if, for some reason, you are unhappy with the fit of your product, please send a photo of your covers fitted or attempted to be fitted to: admin@airplex.co.nz in the first instance. A member of our team will be in touch to solve any issues as quickly as possible.

WARRANTY AND GUARANTEE

Your custom-fit covers are protected by a minimum 12-month manufacturer's warranty and are guaranteed to be free of defects in material and workmanship at the time of sale. Please refer to the Terms and Conditions on our website for full information regarding what is and what is not covered by our warranties.


We thank you for your business!

The team at Airplex

CAUTION: Use caution when feeding straps through under seat. Sharp edges could be present.


1. Identify Each Piece

Unpack the covers and lay out to identify each piece before you fit them. You can line up seat belt holes visually.

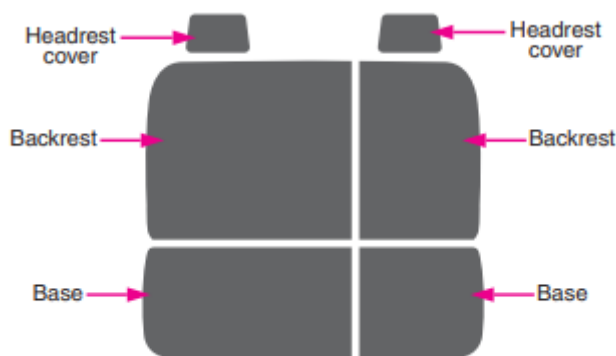

2. Seat Identification


Middle & rear seat configurations vary considerably from vehicle to vehicle. Some of the more common configurations are illustrated below. It is important to identify your type, don't worry if yours is not listed here, your pattern will match your vehicles configuration.

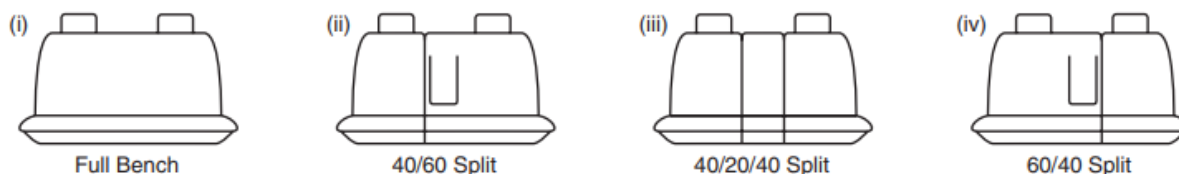

Once you have determined your seating configuration please refer to the correct fitting instructions. Generally there are one of 2 options: split fold and full bench seats.

Option 1: Split Fold Seats


In most cases split fold seats do not require to be removed from the vehicle to fit the seat covers as the base and backrest sections tilt on a hinge making for easy fitment. Simply locate the seat release mechanism, usually found at the front of base sections and top of backrest sections. Example below (Fig 1):

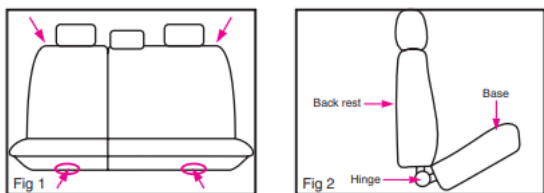


With the base elevated (Fig 2) fit the seat cover. There is no need to remove the base from the car with these configurations.

FITTING BASE COVER

Fit the base cover by aligning the covers seam edges with the edge of the seat, from underneath align ties and tie them together using a bow as pictured.

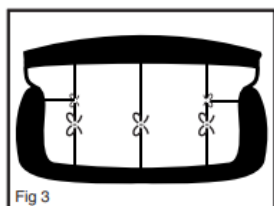

Remove Head Rests

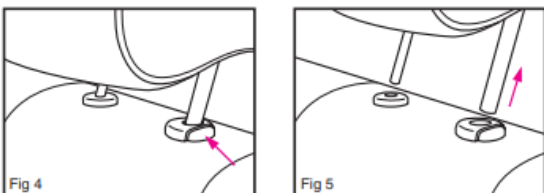


1. Depress button

2. Slide out head rest

Note some headrests might require an additional step to disengage the headrest from the seat. Check owners manual for more information.


Fitting Back Rest Covers

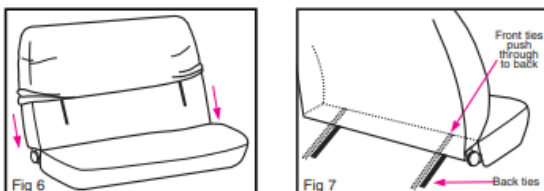


Fit the backrest section of the seat cover by sliding it down back and forth until the top of the cover reaches top of the seat. Align seat cover seams with the edge of seat and line up rear armrest and seat belt receiver allowances before fastening with the ties. Ensure the front face panel is not twisted and smooth out the fabric against the seat to reduce creases (Fig 6). Feed the front ties through backrest and seat base so the ties can be connected at the rear of the seat by tying a bow (Fig 7).

FITTING HEADRESTS

Refit headrest into the seat before fitting the headrest cover. Slide headrest cover on from side to side and smooth any wrinkles.

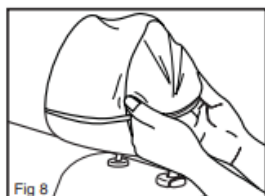


Integrated Seat Belts

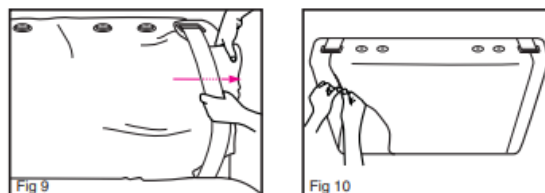

Some vehicles have integrated seat belts. To fit the seat cover separate the velcro section before sliding the cover over the seat. The velcro section allows the cover to be passed through and behind the seat belt and then fastened on the rear side of the backrest.

Option 2: Full Bench

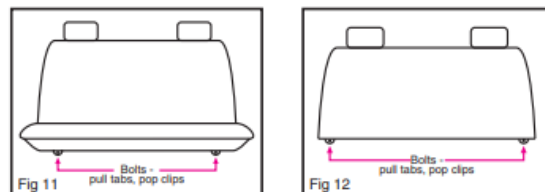


A full bench seat will usually require to be removed from the vehicle to fit the seat covers. Fastening points may include bolts, pull tabs or pop clips. These are usually located at the front of the base section. Note: Pop clips can require some force to disengage and re-engage. Once the base is removed the backrest fastening points will be visible, repeat the process. If the backrest is hinged removal is not required as it can be tilted forward to fit the covers.

Fitting Base & Backrest Section

Remove headrests (See Fig 4 & 5). Place a drop cloth on the ground, next to vehicle to place the seats on to fit the covers. This will protect seats from getting scuffs & abrasions when fitting the covers.

Fit the base cover by aligning the seams of the cover with the edges of the seat, match up the allowances for headrest and seat belt holes. Secure the covers by aligning the ties underneath the seat base and tying with a bow.

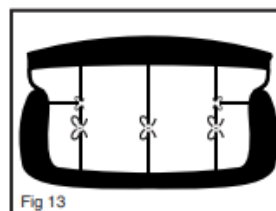

Repeat for backrest cover and refit to vehicle.

To get the best out of your seat covers below are some important tips:

1. Properly fitted seat covers will not slip and slide and will last longer than poorly fitted seat covers.
2. The ties are designed to keep them in place, they do not need to be over tensioned.
3. Tuck and tidy straps, consider if you cut ties it might be hard to fit again if you wash your covers.
4. After 1 month it is recommended to re-tension ties if required