

FITTING INSTRUCTIONS FIT1380 PLEASE READ INSTRUCTIONS COMPLETELY BEFORE INSTALLATION

Intercooler Guard

SG404B

MADE IN NEW ZEALAND


Intercooler Guard for Fuso – Fuso Shogun with smaller intercooler:

Note: the installation will need to be done over a pit or ledge to insert the intercooler guard up from under the vehicle.

1. Press the release tab and open the upper bonnet/hood.
2. Locate and remove the three screws that hold the centre grill on. Retain these to refit later.



3. Remove the centre grill.
4. Insert the Intercooler Guard orientated so the top left hole aligns with factory bolt marked 'A'. (upper-most of the two bolts)

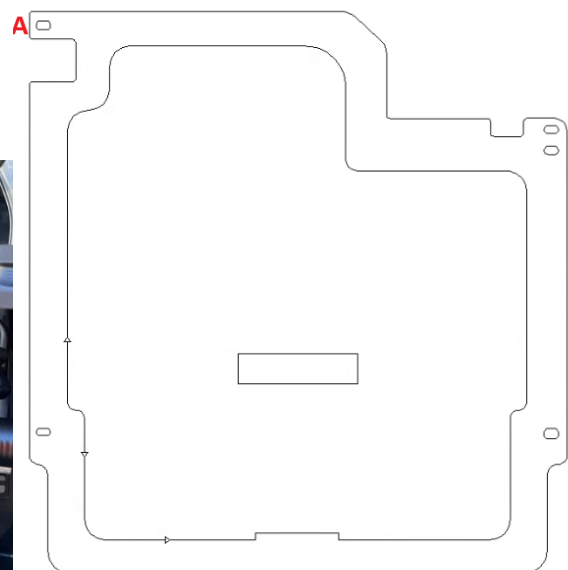

5. Align the remaining holes with factory mount points on the front of the intercooler. The top right bolt will align with factory bolt. Use this to secure the guard. The lower bolts will use the supplied hardware.



AUTOMOTIVE ACCESSORY
MANUFACTURE & DISTRIBUTION

AIRPLEX INDUSTRIES LTD
21 Saleyards Road, Otahuhu, Auckland 1062, New Zealand
PO Box 11286, Ellerslie, Auckland 1542 New Zealand
PH +64 (9) 276-9826 Fax +64 (9) 276-9836
info@airplex.co.nz www.airplex.co.nz

6. Fasten all bolts firmly.
7. If the Intercooler guard has a slight bow inward, full forward so the bow 'Pops' forward.
8. Refit the factory grill using original screws.