



P4-BP - BLOWPIPE HANDLE

- Proven Quality, Robust Long-Life Design
- Dual-Stage Valves for quick and precise adjustment from fine work through to heavy cutting and heating
- Superior Valve Design with Tension System to Prevent Accidental Adjustment
- Suitable for Oxygen/LPG and Oxygen/Acetylene gases
- Fits to Cutting Attachment (Part no P4-CA) or Brazing/Heating Mixers
- 12 Month Warranty
- Date Stamped for periodic testing in accordance with AS4839

For more info



Part No.	Description	Compatible Gases	Inlet Connections	Unit
P4-BP	Blowpipe Handle	Oxy / Acetylene Oxy / LPG	5/8" UNF x 18 tpi	Each

DIAGRAM - CYLINDER TO TORCH


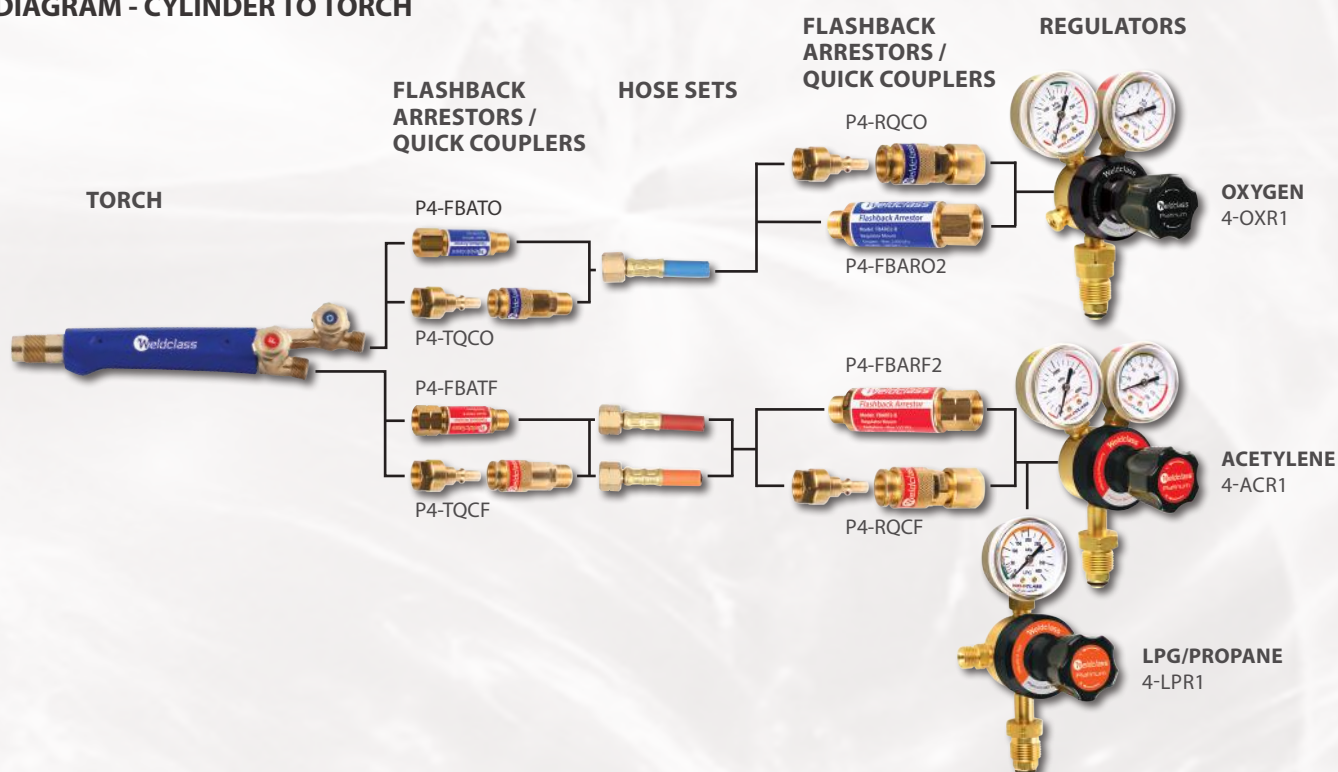



DIAGRAM - TORCH TO TIP - CUTTING & GOUGING


Cutting Attachment | P4-CA




Blowpipe Handle | P4-BP

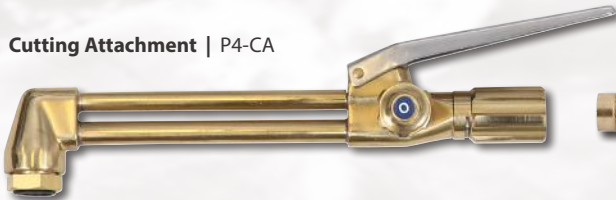

Oxy/Acetylene




Oxy / LPG



CUTTING & GOUGING TIPS				
Type	Size	Capacity/ Shape	Part No.	
			Acet.	LPG
Cutting	6	1-6mm	P4-T416	P4-T446
	8	6-10mm	P4-T418	P4-T448
	12	10-20mm	P4-T4112	P4-T4412
	15	20-75mm	P4-T4115	P4-T4415
	20	75-125mm	P4-T4120	P4-T4420
	24	125-200mm	P4-T4124	P4-T4424
Gouging	32GS	Straight	P4-4132GS	P4-4432GS
	32GB	Bent	P4-4132GB	P4-4432GB
	48GB	Bent	P4-4148GB	P4-4448GB


DIAGRAM - TORCH TO TIP - HEATING & BRAZING

BRAZING



BRAZING TIPS			
Size	Capacity Max Steel Thickness	Part No.	
		Acet.	LPG
8	2.0mm	P4-08WT	P4-08WTLP
10	2.5mm	P4-10WT	P4-10WTLP
12	4.0mm	P4-12WT	P4-12WTLP
15	6.5mm	P4-15WT	P4-15WTLP
20	10.0mm	P4-20WT	-

HEATING




Acetylene **LPG**


HEATING MIXERS

Acet/LPG | P4-AHMX


LPG Hi-Flow | P4-LPHMX




Standard Mixer | P4-MX




Blowpipe Handle | P4-BP



Acetylene 8x12 (180Mj/hr) P4-AH812

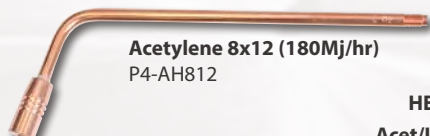

Heating Barrel S/Steel 450mm | P4-SHB

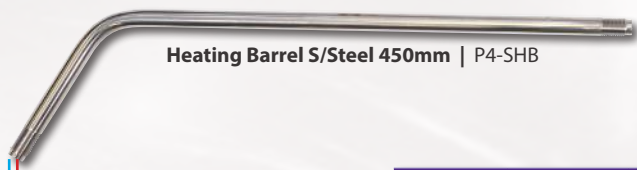

HEATING TIPS			
Fuel Gas	Size	Max Output	Part No.
Acet	1 (8x12)	180 Mj/hr	P4-AHT1
Acet	2 (12x12)	215 Mj/hr	P4-AHT2
LPG	1 (18x12)	280 Mj/hr	P4-LPHT1
LPG	2 (36x12)	420 Mj/hr	P4-LPHT2
LPG	3 (48x12)	560 Mj/hr	P4-LPHT3

