


Carriages


BUG-O carriages maximum load capacity is based on the number of carriage wheels.
A carriage is capable of holding 25 lbs. per wheel.

For Aluminum Rigid Rail

For Modular Drive And Universal Bug-O-Matic

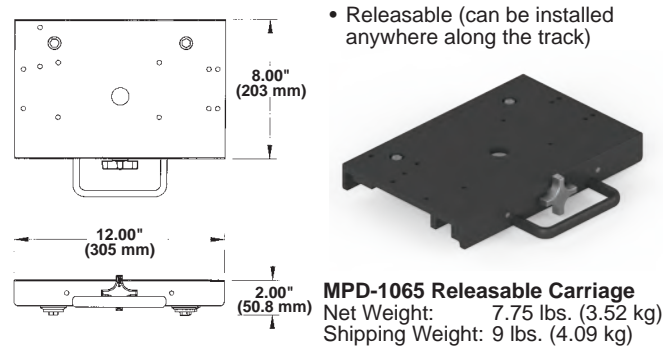

For DC IV Drives

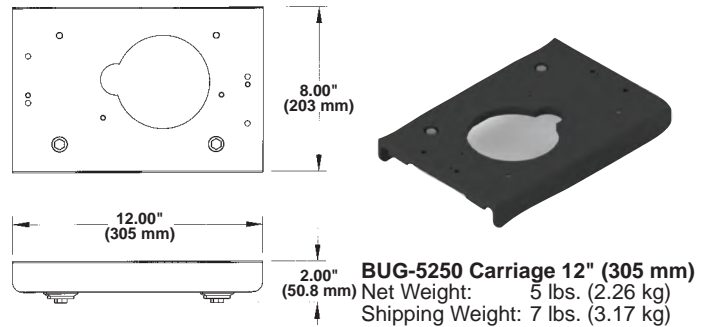


For Bent Rigid Rail

- Mounts a DC IV Drive Unit, Modular Drive Unit and Universal Bug-O-Matic
- Releasable (can be installed anywhere along the track)
- Runs on straight or BRR Ring Rail



For Hi-Flex Rail

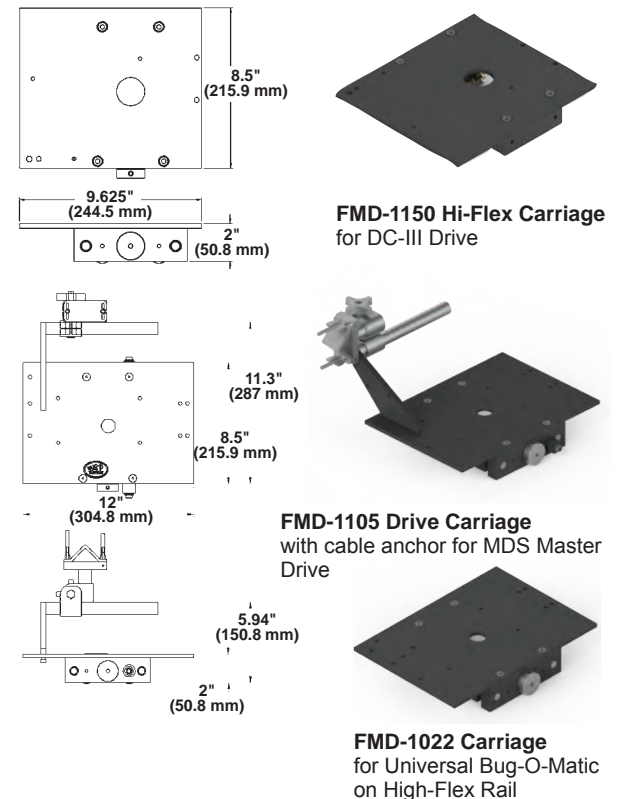


		Rails		
		ARR	AFR	BRR
Carriages	BUG-5250	X	X	N/A
	BUG-5910	X	X	X
	MPD-1065	X	X	X
	BUG-5260	X	X	N/A
	BUG-2790	X	X	N/A
	BUG-2785	X	X	N/A

* These carriages are split style and can be mounted or removed at any location on the rail.

BUG-5250 accepts: DC IV Drives

BUG-5910 accepts: DC IV, MDS & Universal Bug-O-Matic Drives

MPD-1065 accepts: MDS & Universal Bug-O-Matic Drives

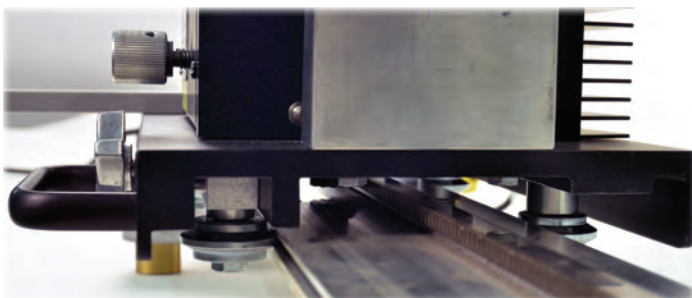

MPD-1065 Releasable Carriage
Mounted on Bug-O Aluminum Rigid Rail



FMD-1105 Drive Carriage
Mounted on Bug-O Hi-Flex Rail