

# EasyCharge Portable: Waterproof portable battery chargers


For people on the move, the EasyCharge portable battery charger offers a reliable solution that can be used on the boat, car, motorcycle, and camper van. With a rugged, ergonomic construction, and waterproof to IP65 standard, the portable chargers have an intuitive control panel and a universal input (120-230 V) for total worldwide freedom.

Users can quickly select between 6 V (ideal for toys, classic cars and motorcycles) and 12 V operation. The units include 1.8 m of DC cable that connects to either a 61 cm lead with ring terminals, or a 61 cm lead with alligator clips, for easy installation and a variety of applications; both leads are included in the package.



## FEATURES

- Entry level model with Mastervolt 3-step+ charge characteristic.
- Suitable for any type of battery, including Lithium Ion.
- Full power up to 40 °C.
- Includes cable & Euro plug.
- Simple switching between 6 V and 12 V.
- Portable and waterproof.
- Easy to connect through ring terminals, or alligator clips (included).

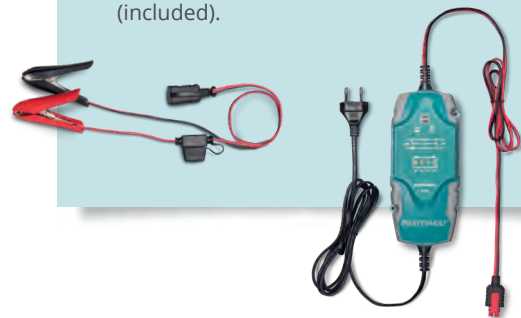

## Specifications EasyCharge Portable battery chargers

	EasyCharge Portable 1.1A	EasyCharge Portable 4.3A
Product code	43510100	43510400
With UK plug	43510102	43510402
<b>GENERAL SPECIFICATIONS</b>		
Total charge current	1.1 A	4.3 A
Recommended battery capacity: maintain	2.2 to 40 Ah	14 to 120 Ah
Recommended battery capacity: charge	2.2 to 25 Ah	14 to 90 Ah
Nominal input voltage	120/230 V (90-265 V), 50/60 Hz	120/230 V (90-265 V), 50/60 Hz
AC connection	1.8 m (6 ft) cable + Euro plug (CEE7/16)	1.8 m (6 ft) cable + Euro plug (CEE7/16)
DC connection	ring and alligator clip connections, with integrated fuse for additional safety	ring and alligator clip connections, with integrated fuse for additional safety
Dimensions, hxxwxd	152 x 63 x 35.5 mm 6 x 2.5 x 1.4 inch	161 x 72 x 43.7 mm 6.3 x 2.8 x 1.7 inch
Weight	0.5 kg / 1.1 lb	0.9 kg / 2 lb
Approvals	CE, ABYC	CE, ABYC
<b>TECHNICAL SPECIFICATIONS</b>		
Charge characteristic	IUoUo, automatic 3-step+ for Gel/AGM/flooded	IUoUo, automatic 3-step+ for Gel/AGM/flooded/Lithium Ion
Temperature range (ambient temp.)	-20 °C to 40 °C	-20 °C to 40 °C
Protection degree	IP65	IP65
Protections	short circuit, reverse polarity, over-voltage, current limited, over-temperature	short circuit, reverse polarity, ver voltage, current limited, over-temperature
MasterBus compatible	no	no



In addition to the waterproof Mastervolt battery chargers, we also supply ProMariner ProSport series waterproof battery chargers.

For more information, please consult the ProMariner product catalogue and ProMariner website.

**ProMariner™**  
PROMARINER.COM