



Maßzeichnungen in: mm/inch

Serie 34

**LED Navigationslaternen –
Neueste LED-Generation im
attraktiven und schlanken Design.
Absolut wartungsfrei**

Einsatzbereich

Einsatz je nach Tragweite und Schiffslänge.
Siehe Produkttabelle

Gehäuse

Aluminium/Polykarbonat, seewasserfest,
UV-geschützt, korrosionsbeständig,
amagnetisch, schlag- und stoßfest

Optik

Innovative Linsentechnologie für weite
Sichtbarkeit mit zwei Leuchtdioden

Montage

Deckmontage

Elektrik

Verpolungsschutz enthalten, Leucht-
mittel inklusive



1 Zweifarben Aluminium



2 Zweifarben weiß



3 Zweifarben schwarz

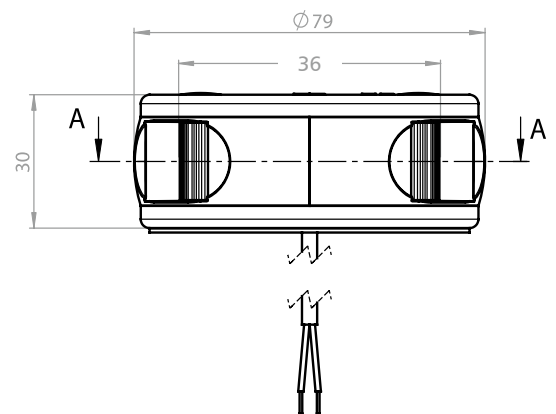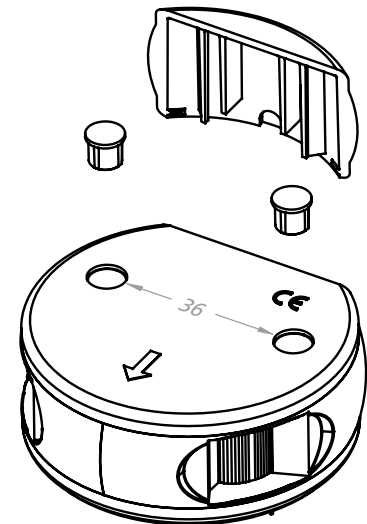

Befestigung auf Deck und unter Tritt möglich!

Nr.	Bezeichnung	Schiffslänge	Wattage	Tragweite	Gehäusefarbe	Montage	Voltage	Artikelnummer
NEU! 1	Zweifارben	< 20 m/ < 65 ft.	3 W	2 nm	Aluminium	Deck	12 V, 24 V	3863201000
2	Zweifارben	< 20 m/ < 65 ft.	3 W	2 nm	Weiß	Deck	12 V, 24 V	3863101000
3	Zweifارben	< 20 m/ < 65 ft.	3 W	2 nm	Schwarz	Deck	12 V, 24 V	3863001000



Dimensions in: mm/inch



Series 34

LED navigation lights –
The latest LED generation in
an attractive and slim design.
Totally maintenance-free

Application

Application depending on required visibilities. See product table

Housing

Aluminium/Polycarbonate, seawater resistant, UV protected, non-corrosive, non-magnetic, impact and shock resistant

Optics

Innovative lens technology for wide visibility with two light-emitting diodes

Mounting

Deck-mount

Electric

Invers polarity protection included, bulb included



1 Bicolor aluminium



2 Bicolor white



3 Bicolor black

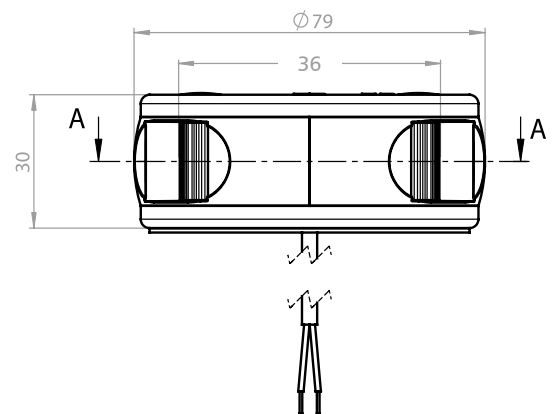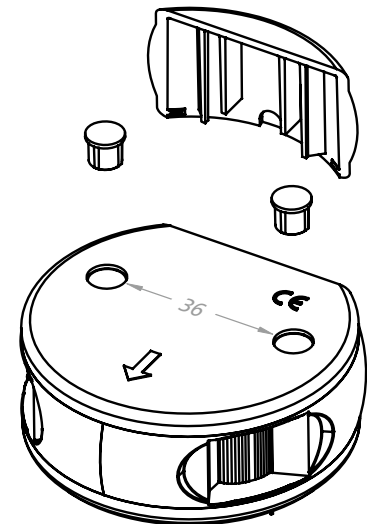

Deck-mount or under step!

NEW!

No.	Description	Ship size	Wattage	Visibility	Housing colour	Mounting	Voltage	Article number
1	Bicolor	< 20 m/ < 65 ft.	3 W	2 nm	Aluminium	deck-mount	12 V, 24 V	3863201000
2	Bicolor	< 20 m/ < 65 ft.	3 W	2 nm	White	deck-mount	12 V, 24 V	3863101000
3	Bicolor	< 20 m/ < 65 ft.	3 W	2 nm	Black	deck-mount	12 V, 24 V	3863001000