



# POLY CONNECTOR ELBOW PE X FI

## FI ELBOW

### Specifications

- Working temperature -20°C to 60°C
- Max. pressure rating 1600kPa

### Features

- DR Brass
- Watermark approved
- No disassembly required, pipe can be inserted without disassembling the fitting
- Triple lip seal
- No fidly thimbles or grab rings
- Spare parts available




Austworld  
PO Box 311  
Ashmore City  
QLD 4214

P: 1300 780 430  
F: 1300 780 441  
E: [info@austworld.com.au](mailto:info@austworld.com.au)  
W: [www.austworld.com.au](http://www.austworld.com.au)





# POLY CONNECTOR ELBOW PE X FI

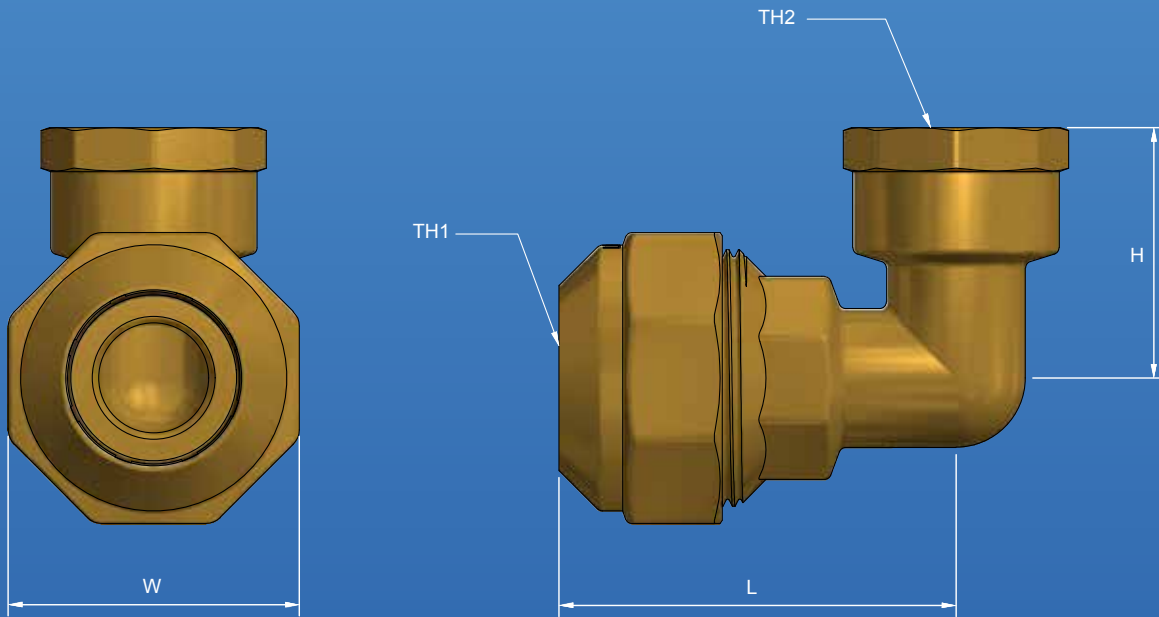

## Sizing Chart MM

	L	H	W	TH1	TH2
AW4201	59	37	43	25PE	Rp 3/4"
AW4207	60	45	50	32PE	Rp 1"



Austworld  
PO Box 311  
Ashmore City  
QLD 4214

P: 1300 780 430  
F: 1300 780 441  
E: [info@austworld.com.au](mailto:info@austworld.com.au)  
W: [www.austworld.com.au](http://www.austworld.com.au)

