



POLY CONNECTOR ELBOW PE X MI

MI ELBOW

Specifications

- Working temperature -20°C to 60°C
- Max. pressure rating 1600kPa

Features

- DR Brass
- Watermark approved
- No disassembly required, pipe can be inserted without disassembling the fitting
- Triple lip seal
- No fidly thimbles or grab rings
- Spare parts available




Austworld
PO Box 311
Ashmore City
QLD 4214

P: 1300 780 430
F: 1300 780 441
E: info@austworld.com.au
W: www.austworld.com.au





POLY CONNECTOR ELBOW PE X MI

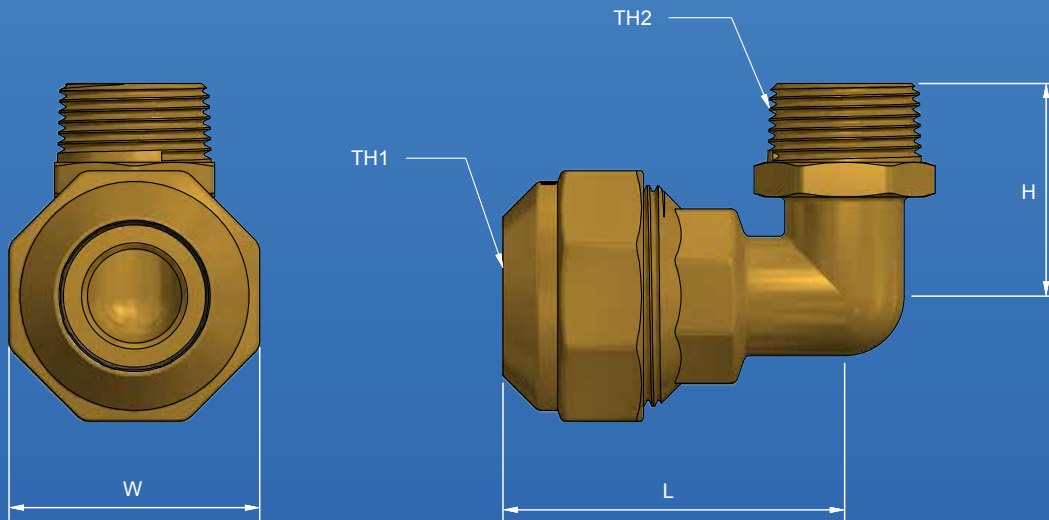

Sizing Chart MM

| | L | W | H | TH1 | TH2 |
|--------|----|----|----|------|--------|
| AW4202 | 59 | 43 | 37 | 25PE | R 3/4" |



Austworld
PO Box 311
Ashmore City
QLD 4214

P: 1300 780 430
F: 1300 780 441
E: info@austworld.com.au
W: www.austworld.com.au

