








Bicycle Cargo Trailer

Owner's Manual & Instruction




You should not use the Carrier if you have not read and understood the contents of this Owner's Manual. Failure to heed this warning may result in serious or fatal injury.

The bicycle follower can be coupled to bicycles to me to the bicycle size of 20 " to 28".

-  - Our bicycle followers are determined only for the transport of luggage. no children or animals may be transported.
-  - Maximum useful load 45 kg
-  - As with an automobile is valid: The higher the useful load of the follower, the greater is the effect on the Handling and braking distance of the vehicle.
-  - The luggage must be certainly fastened.
-  - Before every journey you check your bicycle brake for the functionality.
-  -Maximum speed 40 KM/H think by the bending always of the fact that now your bicycle has become longer about 140 cm.
-  - Please, check whether the bicycle is likely to pull the bicycle follower. Ask your bicycle trader or read the instructions for use of the bicycle manufacturer

Step 1:

Connect loading frame(1) and the fork with wheel by connect nut as per below images:

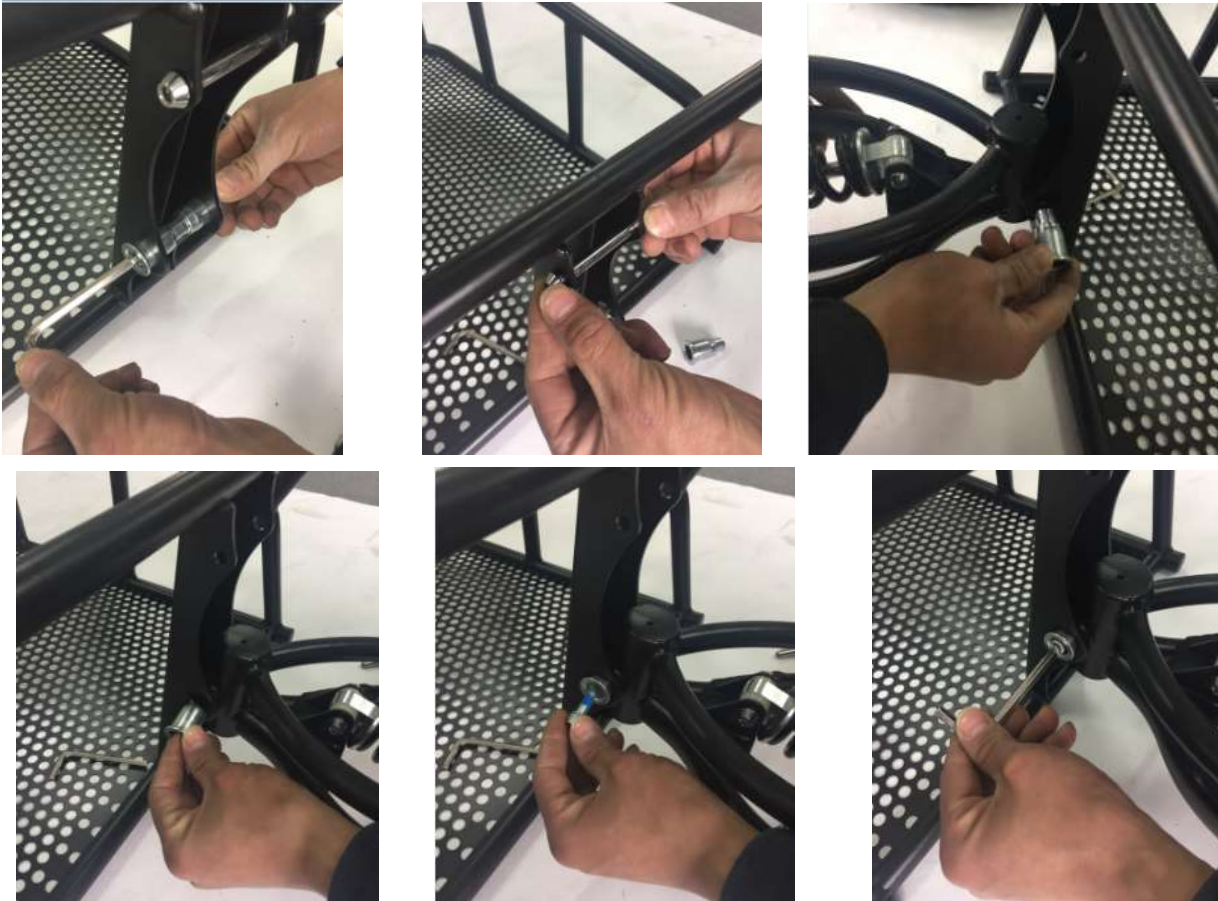

Step 2:

Install the damper on the loading frame as per below images:



Step 3:

Install the rear wheel and cargo rack on the rear fork as per below images:



Step 4:

Install the front fork as below images:




Step 5:

Install the safety flag as per below images:



CONNECTION: THE BIKE USING THE QUICK RELEASE AND USING THE ADPATER:

REMARK: QR (QUICK RELEASE) INCLUDE IN PACKAGE, BUT ADAPTER NOT INCLUDE, IT IS OPTIONAL.

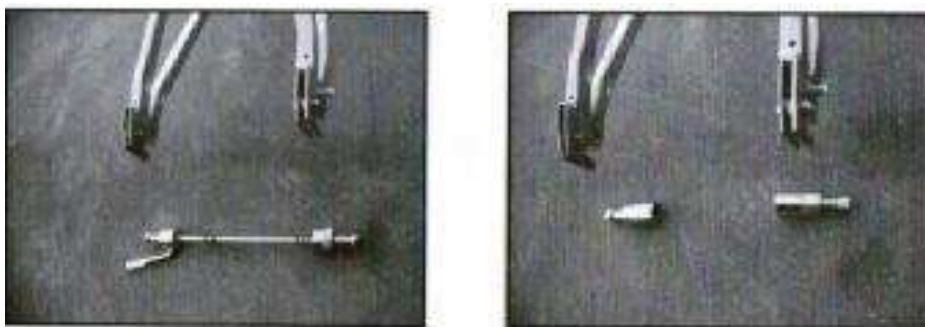

THE BIKE NOT USING THE QUICK RELEASE



tight the screw



put assembled trailer on the quick release



put down the safe lock and
move down along the
arrow sign



now it is locked

ASSEMBLY READY PRODUCT

