

Knit Picker Kits Assembly Instructions

Required Accessories

- 7mm, Pen Mandrel
- 8mm Brad Point Drill Bit- BPD-8mm-PRC
- 8mm Barrel Trimmer – CT-PM-SET-4E
- 2 PCS Bushings Set – BUSH-SRNT
- Glue (Thick CA or Epoxy)


Diagram A



Preparing the Blank

- Prepare and cut a blank of 20mm or larger, to the length of the brass tube (add 2mm for trimming)
- Drill an 8mm hole through the center of the blank.
- Spread glue over the tube, insert into blank with a twisting motion to spread the glue evenly inside.
- Centre the tube inside the blank.
- When glue is dry. Trim the ends of the blank flush to the tube.


Diagram B - Turning the Blank

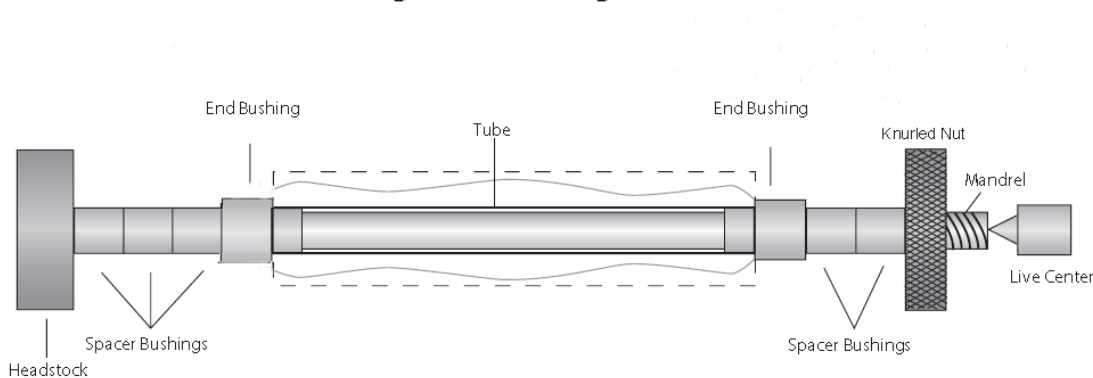

Turning the Blank

- Place the bushings and blank on the mandrel according to Diagram B.
- Thread on the knurled nut and hand tighten to hold all items in place.
- Slide the tailstock to the mandrel shaft, (do not over tighten, it could damage the mandrel) lock in place.
- Turn the handle ends down, flush with the bushings using the lathe tools, gradually increasing the grades of sandpaper.
- Finish the wood with friction polish.

Diagram C

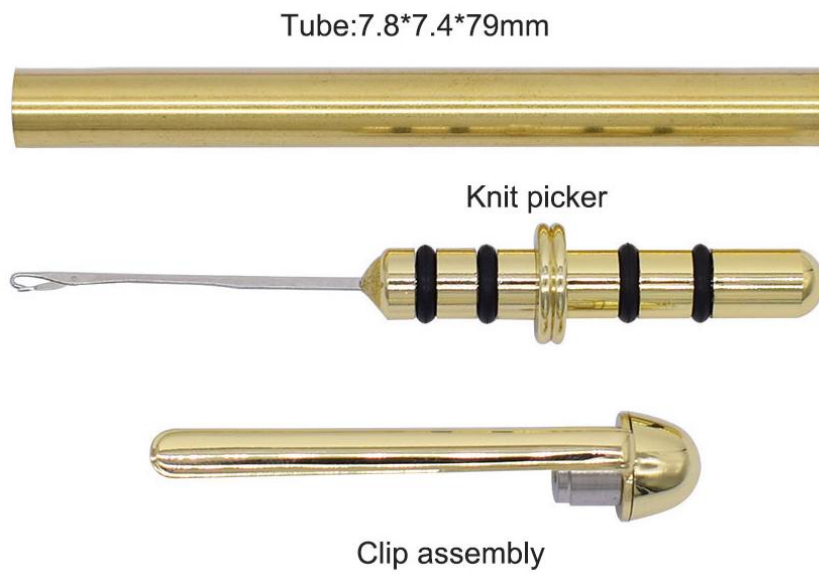

Assembly

- Line up finished parts according to the diagram above.
- Press the clip assembly to one end of the tube.
- Slide the knit picker in and out with both ends to assure a secure fit.
- When not in use, reverse the knit picker to safely store the blade(s).