



PRODUCT ADVANTAGES

- **PERMANENT-CLEAN** automatic soil removal: innovative filter system eliminates manual pre-cleaning. Soil is immediately removed into an external strainer, which saves operating costs and protects the machine
- **VISIOTRONIC-TOUCH** control: colour touchscreen (displays text and graphic) in conjunction with single-button control and remaining cycle time indication
- **WASHSMART** app: controlling your warewash operation with smart technology: status and messages, usage and operating costs, hygiene, service and consumables order
- **SENSO-ACTIVE** resource management: constantly measures the quality of the wash water and keeps the amount of rinsing needed in each rinse cycle to the minimum in order to guarantee a fully hygienic wash result
- **Eco** programme: switchable steam rinse cycle reduces fresh-water consumption to 1.4 l/cycle. Saving of up to 44 % water and chemicals
- **VAPO-ACTIVE** steam washing: significantly less manual pre-cleaning and second runs by intensive wash cycles with steam
- **POWER-PLUS** wash programme: selectable high-pressure programme to wash heavily soiled wash items
- Exhaust energy storage: the fully enclosed 4-sided hood keeps steam and energy inside the system: energy saving up to 3 kW, less humidity in the kitchen area and better hygienic conditions
- **CLIP-IN** wash and rinse arms: wash and rinse arms can be removed with one hand and without any tools
- **ROTOR-X** wash system: separate rotating upper & lower 4-spoke wash arms deliver dynamic wash power
- **VAPOSTOP (optional)**: prevents vapour escaping from the machine when the hood is opened. Certified to remove need for an exhaust canopy
- **AUTO-HOOD LIFT (optional)**: close hood at push of a button - auto open at end of cycle
- Interlocked strainer: prevents operation without tank strainer
- Optional refill signal: monitors contents of external chemical containers
- **EASY-CLEAN** concept: blue markings in the machine help the operator to identify the components which require cleaning
- **WATERMARK** approved


TECHNICAL DATA

Cycle times (*)	52 / 70 / 170 / 180 sec. and special cycles
Water consumption	1,4 l/rack
Tank capacity	40 l
Tank heating	2,5 kW
Power supply	415 / 50 / 3N
Booster loading	
Standard	12,4 kW
Alternative	6,2 kW
Total loading	
Standard	17.0 3 x 35 A
Alternative	10.8 3 x 25 A
Wash pump	1 x 1.1 kW + 1 x 0.7 kW
Rack size	500 x 500 mm
Loading height	440 mm
Noise level	66 dB (A)
Weight (gross / net)	160 / 140 kg

CONNECTIONS

① Drain hose - 2nd drain required. See point 6	2,000 mm ID 20 / OD 25
② Supply hose	2,000 mm R 3/4"
Required flow rate	5 l/min
Flow pressure	0.5 (0.8 with softener) - 10 bar
Max. supply water temperature	60 °C 35 °C with RO
③ Power cord	2.500 mm
Supply hose for	
④ Detergent	2.000 mm
⑤ Rinse aid	2.000 mm
⑥ Drain hose PERMANENT-CLEAN	2,000 mm ID 20 / OD 25

DIMENSIONAL DRAWING

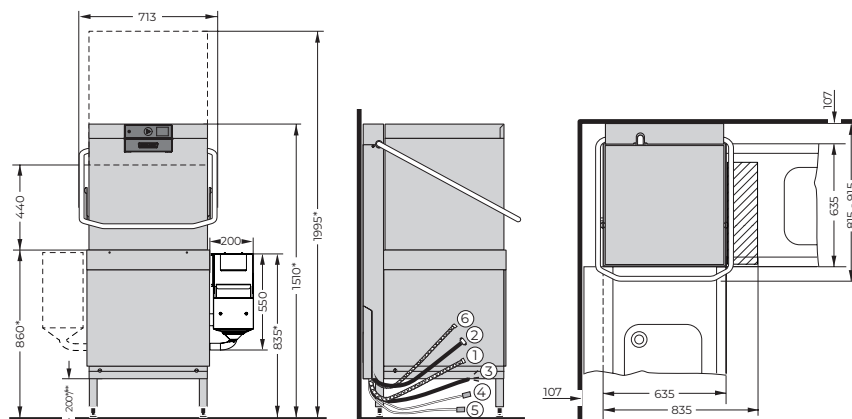

* 25 mm adjustable feet
** 137 mm with heat recovery