

SPH515HAU

| | |
|---|---|
| Family | Dishwasher |
| Subfamily | Hoodtype |
| Type | Hoodtype dishwasher |
| Crockery | Crockery; Glasses; Cutlery; GN1/1 trays |
| Basket dimensions | 500x500 mm |
| Control panel | Electronic |
| Standard drain pump with partial water renewal in the wash tank | Yes |
| Rinse pump | HTR system |
| Boiler type | Atmosferic boiler |
| Wash pump | Standard |
| SHR system | Yes |
| Power connection | 400 V 3N~ / 16 A / 9,7 kW / 50 Hz |
| Product dimensions WxDxH | 620x750x1530 mm |



Distribution

| | |
|------------|--|
| Industries | Bar / Cafeterias / Bistros / Wine bars / Pubs; Hotels; Ristoranti / Catering; Bakeries / Pastry shops; Food Industries; Care facilities ; Grocery shops / Food retail; Catering; Commercial food services; Butcher shops / Delicatessens |
|------------|--|

Aesthetics

| | | | |
|-----------|-------|-------|----------|
| Led color | Green | Serie | Easyline |
|-----------|-------|-------|----------|

Technical Features

| | | | |
|-----------------------------------|-----------|------------------------|--------------|
| Trays number | 7 x GN1/1 | Max. inlet temperature | 20°C |
| Trays washing option | Yes | Max water hardness | 5°f - 3°dH |
| Water consumption per cycle | 3,2 l | Inlet pressure | 100-1000 kPa |
| Wash temperature (min-max) | 58 °C | Detergent load | 1,5 l/h |
| Rinse temperature (min-max) | 87 °C | Rinse load | 0,4 l/h |
| Min. water connection temperature | 8°C | Usable load height | 470 mm |

Minimum water consumption per cycle 3,2 l

Programs

| | |
|-----------------------------|--|
| Programs | 6 automatic programs; 1 fully programmable program; Self-cleaning programs |
| Program options | Extra rinse; Clean water cycle |
| Program table | Easyline hoodtype |
| Maximum basket/hour | 60 |
| Maximum dishes/hour | 1080 |
| Maximum glasses/hour | 2160 |

Electrical Connection

| | | | |
|-------------------------------------|--------|-------------------------------------|--|
| Tank heating element power | 2200 W | Default connection | 9700 W |
| Boiler heating element power | 9000 W | Electrical connection option | 230 V~ / 16 A / 3,7 kW / 50 Hz; 230V~ / 26 A / 9,7 kW / 50 Hz ; 230 V~ / 30 A / 6,7 kW / 50 Hz |
| Wash pump power | 700 W | Plug | No |

Interface

| | | | |
|--------------------------|---------|--------------------------|-----|
| Display | 4 digit | On/Off button | Yes |
| Number of buttons | 5 | Manual diagnostic | Yes |

Construction

| | | | |
|------------------------------|---|--------------------------|------------------------|
| Tank Construction | Deep drawn | Filter | 5-stages filter system |
| Tank material | Double-skin hood | Tank capacity | 14 l |
| Back panel | Stainless steel AISI 304 | Boiler capacity | 10 l |
| Upper washing system | Prepainted | Rumorosità | Lpa 59,9 dBA |
| Lower washing system | One washing and one split rinse spray arms, stainless steel | Protection class | IPX4 |
| Tank filter | One washing and one split rinse spray arms, stainless steel | Adjustable feet | Yes |
| Hood elevation system | Stainless steel | Drain max. height | 1000 mm |
| | Manual | | |

Accessories Included


| | | | |
|-----------------------|------------|--------------------------|----------------------|
| Dish basket | PB50D01 | Water supply pipe | In acciaio Watermark |
| Cutlery basket | 1x PHOOS04 | Drain pipe | Yes - 2m |
| Flat basket | PB50G01 | | |

Equipments













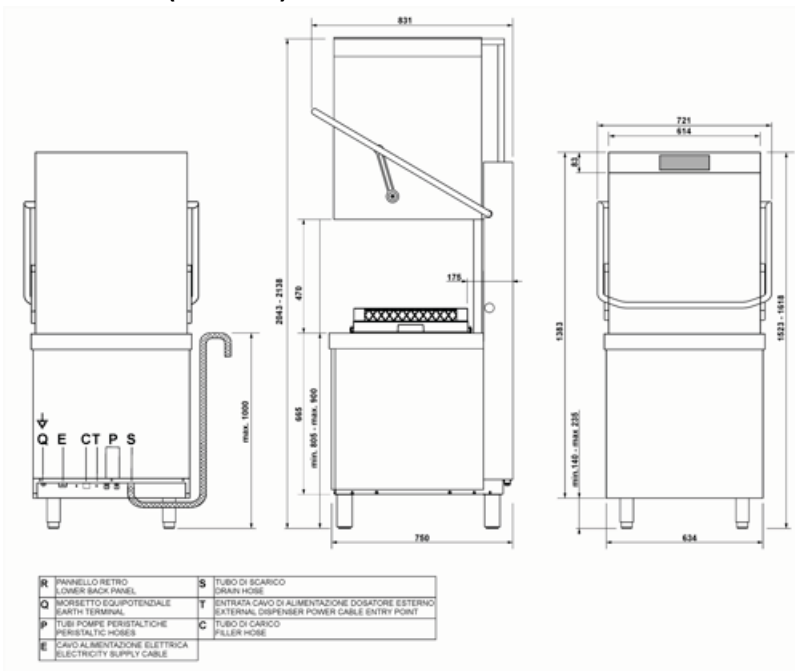





| | | | |
|--|-------------------------|---------------------------------|------------------|
| Peristaltic detergent dispenser | Yes, electronic control | Option for auto daily switch on | Yes, default OFF |
| Peristaltic rinse-aid dispenser | Yes, electronic control | Cycle counter | Yes |
| Default chemicals dosing unit of measure | gr/lt | Break tank | Yes |
| Rinse boiler Thermostop system | Yes - default | Water supply pipe diameter | DN15 - ½" |
| Wash tank Thermostop system | Yes | Drain supply pipe diameter | DN20-G 3/4" |
| Wash pump soft start system | Yes | Detergent (red) hose length | 2,2 m |
| Stand-by system | Yes | Rinse aid (blue) hose length | 2,2 m |

Logistic Information

| | | | |
|-----------------------------------|-----------------|-------------------|------------|
| EAN code | 8017709343439 | Net weight | 131,000 kg |
| Packed product dimensions (WxDxH) | 1700x770x900 mm | Gross weight (kg) | 142,000 kg |



Compatible Accessories

| | | | |
|--|---|---|--|
|  | <p>KITSONLIV Probe level kit</p> |  | <p>PB50D01 Basket made of polypropylene for 18 plates 500x500</p> |
|  | <p>PB50G02 Universal basket in polypropylene 500x500</p> |  | <p>PB50T01 Polypropylene basket for 8 trays GN 1/1 h 40 mm</p> |
|  | <p>PHOGR5 Glass basket for 500x500 mm glasswashers</p> |  | <p>PHOOS01 Single basket in polypropylene for cutlery</p> |
|  | <p>PHOOS03 Basket in polypropylene with 6 compartment for cutlery for Capote</p> |  | <p>PHOOS04 4 compartments polypropylene basket for cutlery</p> |
|  | <p>WB50D01 Wire basket for 18 dishes and trays 500x500</p> |  | <p>WB50G01 Universal wire basket with flat bottom 500x500</p> |
|  | <p>WB50G02 Wire basket for glasses with inclined bottom 500x500</p> |  | <p>WB50G03 Wire basket for glasses with inclined bottom 500x500</p> |
|  | <p>WB50G04 Wire basket for glasses with inclined bottom 500x500</p> |  | <p>WB50PG5 Wire basket with flat bottom for 25 plastic glasses, max. H 230 mm, min.-max. Ø 36-95 mm, dim. (WxDxH) 500x500x260 mm</p> |
|  | <p>WB50T02 Wire basket for 5 trays 600x500</p> |  | <p>WH00S01 Wire insert for 12 small dishes</p> |
|  | <p>WT51200SHL Entry table left side with sink and scraping hole, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm</p> |  | <p>WT51200SHR Entry table right side with sink and scraping hole, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm</p> |



WT51200SL

Entry table left side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



WT51200SR

Entry table right side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



WT5700SR

Entry table right side with sink, splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm



WTC5L

Left side closure kit for Hoodtype



WTC5R

Right side closure kit for Hoodtype



WTX51200

Universal entry/exit table for either side, with lower shelf, dim. (WxDxH) 1200x560x821, 5 mm



WTX51200L

Exit left side table, with splashback (100 mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



WTX51200R

Exit right side table, with splashback (100 mm) and lower shelf, dim. (WxDxH) 1200x720x821, 5 mm



WTX5700

Universal entry/exit table for either side, with lower shelf. dim. (WxDxH) 700x560x821, 5 mm.



WTX5700L

Exit table left side, with back splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm



WTX5700R

Exit table right side, with back splashback (100mm) and lower shelf, dim. (WxDxH) 700x720x821, 5 mm



WTX6700F

Universal table for either side, with front coupling and lower shelf, dim. (WxDxH) 705x660x821, 5 mm

Benefit (TT)

Interface

Control panel with electronic buttons

The electronic control panel features an intuitive interface with soft-touch buttons, allowing easy selection of one of the three wash programmes: short, medium, or intensive. There are also buttons for power, selection, and cycle start. The display provides real-time monitoring of the tank and boiler temperature, as well as diagnostics, ensuring effortless and immediate control of the main functions.

5-stage system

Deep cleaning and spotless washes with the patented filtration system

The innovative Smeg filtration system consists of 5 stages to completely eliminate all impurities: the 1st stage captures larger food residues; in the 2nd and 3rd stages, finer particles are captured at this filtration stage; the 4th stage features a pre-filtration grid to prevent debris from entering the tank and clouding the water. Finally, the last stage is designed to further protect the washing and draining pumps from any debris that may accidentally enter the tank during filter cleaning.

The presence sensor filter alerts if the filtration system is out of position, ensuring safe washes every time.

HTR System

Consistent temperatures and pressures for uniform and effective dishwashing

Thanks to the HTR system (High Temperature Rinse) and the presence of the atmospheric boiler combined with the Thermostop, the cold inlet water does not enter the boiler during rinsing, ensuring a constant temperature of 85°C. The HTR system keeps the water hot for deep sanitisation and quick drying, ensuring constant pressure for uniform and effective cleaning.

SHR+ System

Steam heat recovery system for energy savings and improved work environment quality

SHR+ System: guaranteed savings and comfort

The SHR+ System eliminates 100% of the steam produced during the rinse phase, improving air quality and reducing humidity in work environments. Additionally, it recovers energy from the condensed steam, ensuring up to 25% energy savings and eliminating the costs associated with an external extraction system.

Moulded tank

Superior washing performance and enhanced cleaning convenience with molded tub bottoms and basket guides

Smeg dishwashers are designed with moulded tank and basket guides. The absence of sharp edges ensures an optimised wash flow, guaranteeing hygiene and impeccable cleaning performance. Furthermore, this innovative design simplifies machine cleaning, reducing the need for maintenance interventions.

Double-skin hood

Thermal and acoustic insulation guaranteed

The double-skin design of the hood is engineered to optimise energy efficiency by minimising heat dispersion and accelerating water heating, resulting in lower energy consumption and faster start-up times. Additionally, it provides effective sound insulation, helping to reduce noise levels and ensuring a quieter, more comfortable working environment for staff.

Drain pump

Partial water replacement during the wash cycle for clean and hygienic dishes

The standard drain pump, equipped with a partial water exchange system, ensures that the dirtiest water is automatically removed at every wash cycle. This mechanism allows for continuous renewal of the water used, ensuring that each phase of the washing process is carried out with clean water. The result is optimal dishwashing performance, with outstanding efficiency and an impeccable level of hygiene.

Soft-start system

Effective management of the washing pump to protect your glassware

The Soft-Start function initiates the wash cycle gently and gradually, progressively increasing the water pressure. This system has been designed to provide optimal protection for the most fragile items, such as crystal glasses, significantly reducing the risk of chipping or damage. At the same time, it ensures excellent cleaning performance, combining efficiency and safety in every wash cycle.

Hood lift

Unprecedented comfort with the patented lifting system

The new ergonomic handle, combined with the patented lifting system, minimises the effort required to open and close the hood, limiting it to just 2.5 kg. This system ensures an exceptionally smooth and lightweight operation, helping to protect the operator's health and well-being, even during extended use.