

UD511MDAUS

EASYLINE **FULLY INSULATED** UNDERBENCH DISHWASHER - 1.5 AMP

500x500 mm basket



GUARANTEED WASH PERFORMANCE

In commercial dishwashers, the rinse is the most important part of the wash cycle, as it is the only one performed with clean water. This is the reason why, at Smeg, we believe all commercial dishwashers must have **a rinse pump on board**, the only way to guarantee that optimal and constant pressure and temperature are maintained throughout the rinse cycle.

WE BELIEVE IN OUR QUALITY

All dishwashers are manufactured in our state of the art factory in Italy, where we monitor all phases of design, engineering and production. We believe in our quality and this is the reason why we are pleased to offer **Extended Warranty** on our Easyline dishwasher range.



PRODUCT FEATURES

- **Double skin construction in AISI 304 stainless steel**
- Moulded wash tank, rack guides and door
- Counterbalanced door with spring assisted hinges, full surround door gasket and no supporting rods
- **HTR (High Temperature Rinse) system with atmospheric boiler and rinse pump**
- 2.5 litres water rinse cycle
- Over 22% water exchange every cycle
- Drain pump with triple stage dynamic filtration system
- **Door opening height: 415mm**
- Upper and lower wash and rinse arms in AISI 304 stainless steel
- Full size tank filter with removable basket, all in AISI 304 stainless steel
- Electronic controls with 3 wash programs
- Shortest wash program 90 seconds
- Soft start wash pump
- Automatic self-cleaning cycle
- Shut-off at the end of drain cycle
- Thermostop system to ensure correct rinse temperature
- Adjustable peristaltic pumps for detergent and rinse-aid injection
- Self-diagnostic system with error messages
- **15 Amp plug**
- **24 months parts and labour warranty**

ACCESSORIES

- PB50D01 - 500x500mm basket. 18-plate Ø250mm
- PB50G01 - 500x500mm flat-bottomed basket
- WB50D01 - Wire basket. 18-plate Ø250mm
- WB50G01 - Wide-mesh wire basket with flat bottom
- WB50G02 - Wire basket with inclined bottom for stem glasses max Ø90mm
- WB50G03 - Wire basket with inclined bottom for stem glasses max Ø72mm
- WB50G04 - Wire basket with inclined bottom for stem glasses max Ø120mm
- WB50T02 - Wire basket for 7 GN1/1 20mm deep baking rins
- WB50T03 - Wire basket for GN1/1 60mm deep


UD511MDAUS

EASYLINE **FULLY INSULATED** UNDERBENCH DISHWASHER - 1.5 AMP

500x500 mm basket

TECHNICAL SPECIFICATIONS

| | | | |
|----------------------------------|--------------------------------|--------------------------------------|--|
| Dimensions (mm) (WxDxH) | 600x600x820 | Minimum supply pressure (bar) | 2.5 |
| Basket (mm) | 500x500 | Drain pump | Yes |
| Door clearance (mm) | 415 | Rinse aid pump | Peristaltic |
| Type of interface | electronic | Detergent pump | Peristaltic |
| Door/hood structure | double skinned insulated | Programme 1 (sec) | 90* |
| Supplied water temperature (°C) | Hot water (max 60°) | Programme 2 (sec) | 150* |
| Tank volume (litres) | 11 | Programme 3 (sec) | 240* |
| Tank heating element (W) | 2,000 | Special programmes | Total renewal of the water inside the tank Extra rinse Self-cleaning |
| Filtering system | Tank filter + selective filter | Thermostop | Yes |
| Boiler volume (litres) | 6 | Total power (W) | 3,000 |
| Boiler heating element (W) | 2,300 | Electrical connection | Single Phase 15Amp |
| Wash pump (W) | 680 | Basket number | |
| Tank temperature (°C) | 60° | dishes | 1 x PB50D01 |
| Rinse pump | Yes | universal / glasses | 1 x PB50G01 |
| Rinse temperature (°C) | 85° | cutlery | 1 x PHOOS02 |
| Adjustable temperatures | Yes | | |
| Water consumption (litres/cycle) | 2.5 | | |

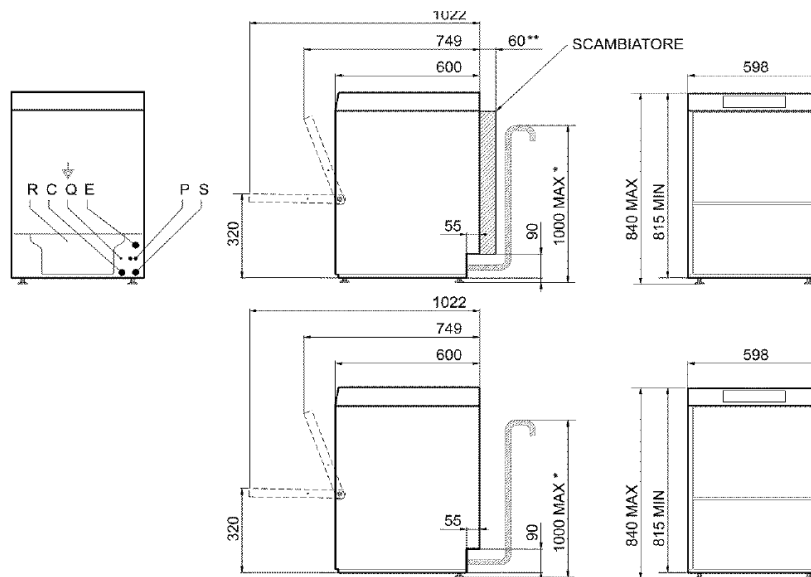

CONNECTION WIRING DIAGRAM KEY

| | |
|---|---|
| R | LOWER BACK PANEL |
| C | EXTERNAL DISPENSER POWER SUPPLY CABLE ENTRY POINT |
| S | DRAIN HOSE |
| Q | EARTHER TERMINAL |

| | |
|---|--------------------------|
| P | PERISTALTIC PUMP HOSES |
| E | ELECTRICITY SUPPLY CABLE |

* Supplied water temperature >50°C and < 60°C and three-phase electrical connection whenever possible



UNI EN ISO 9001
9130-Smeg

UNI EN ISO 14001
9191-SME2

DHSAS 18001
9192-SME3