

QUARTZ ANALOGUE CLOCK USER'S INSTRUCTION

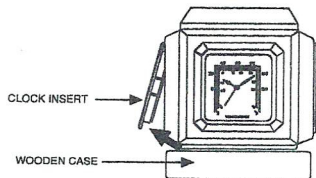


Fig. 1. REMOVAL OF CLOCK INSERT

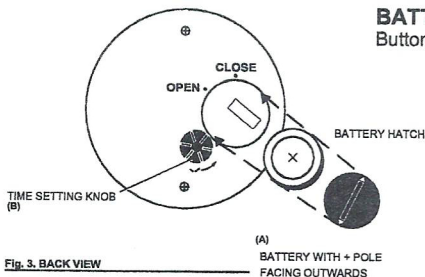


Fig. 3. BACK VIEW

TO START THE CLOCK

Remove clock insert from wooden case by lifting the side of the clock insert with finger. (Fig.1)

Remove battery compartment hatch (A) by turning it in the direction as indicated (Fig.3). Remove insulator and reinsert battery (button cell LR44) with + pole facing outwards. Reassemble battery compartment hatch. When the clock stops or loses time, the battery is running low in power. Immediately replace with a fresh battery.

TO SET THE TIME

Turn the time setting knob (B), in rear of movement, in the direction as indicated until the desired time is shown on the dial. (Fig.3)

BATTERY TYPE

Button cell LR44, RW82, AG13 or equivalent.

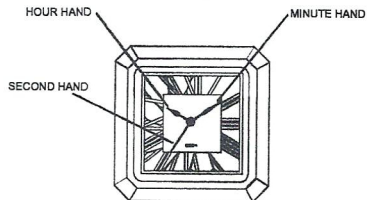


Fig. 2. FRONT VIEW