


DUAL CHECK / NON-RETURN VALVE - 4.5L/min



DC 043 BN/04
Brushed Nickel

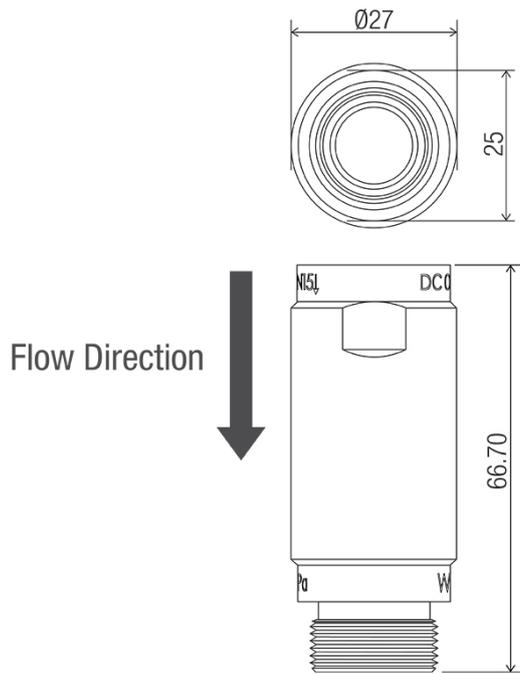

DC 043 C/04
Chrome



DC 043 MB/04
Matte Black

Features

- 1/2" BSP female inlet; 1/2" BSP male outlet
- Designed to accept compression nut and olive
- Operating temperature 1° - 60° Celsius
- Max working pressure 1200 kPa for Full Flow
- Independently operating check valves
- Suitable for low hazard applications



WELS Registration
No.F00443



WaterMark
AS 5200.037.2
WMKA 00667



WaterMark
AS/NZS 2845.1
WMKA 02696



CON-SERV CORPORATION AUSTRALIA PTY. LTD.

17 Glentanna Street, Kedron Qld 4031 Australia

Phone: +61 (0)7 3630 5744–Fax: +61 (0)7 3630 5755–Email: mail@con-serv.com.au–www.con-serv.com.au