


## SUITS 35MM TO 45MM THICK DOORS


### 1. DOOR PREPARATION

- Fold the supplied template and position template on door edge.
- Mark horizontal centre-line of 25mm hole using template, then mark centre of door thickness.
- Drill 54mm hole from both sides of door to avoid splintering.
- Drill 25mm (or 24mm) hole into the edge of the door, central to the door thickness. Ensure the hole is drilled squarely.

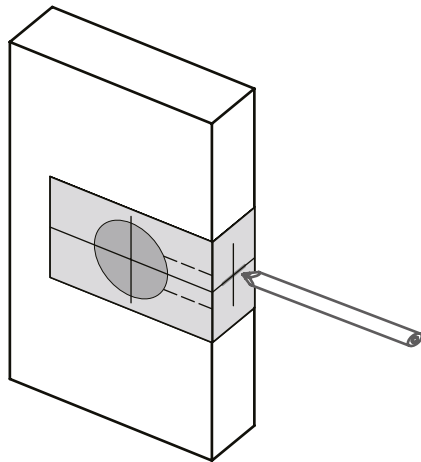


### 2. FINGER-PULL INSTALLATION

- Mark hole position for Finger-Pull on door edge, at desired location above latch hole (MINIMUM 60mm above).
- Drill **24mm hole**, 24mm deep. **NOTE: DO NOT USE DIAMETER 25mm drill.**
- Push Finger-Pull into 24mm hole.

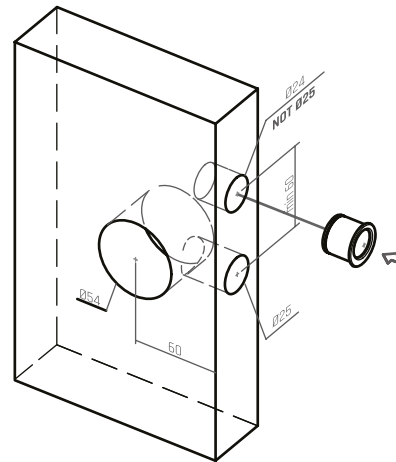

### 3. LATCH INSTALLATION

- Insert the latch into latch hole in door.
- Hold latch centrally in hole and mark around latch faceplate.
- Chisel marked rectangular section to a recess of 4mm or until latch faceplate is flush with the door edge.
- Insert the latch into hole.
- Pre-drill holes and fasten the latch to the door with wood screws provided (#6x20mm).

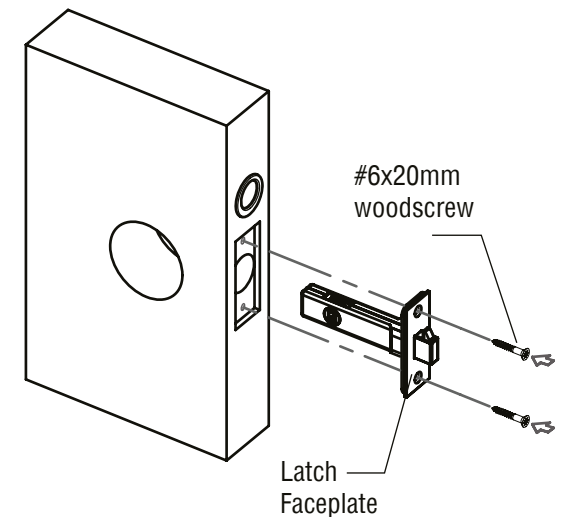

## Print to Actual Size A4