


# Briton

## Briton 7500 Pivot Set Installation Instructions

Max Door Weight 250kg

1. Mill or route door and frame to accept relevant top and bottom components.
2. Locate bearing plate on floor and ensure bottom pivot is in line with top pivot.
3. Recommended minimum distance from jamb to pivot centre line is 70mm.
4. Recommended minimum door clearance is 3mm at top of door and 5mm at bottom of door.
5. Recommended minimum door clearance at stile is 5mm based on a 40mm door thickness.  
(Additional clearance may be required for larger door thicknesses)

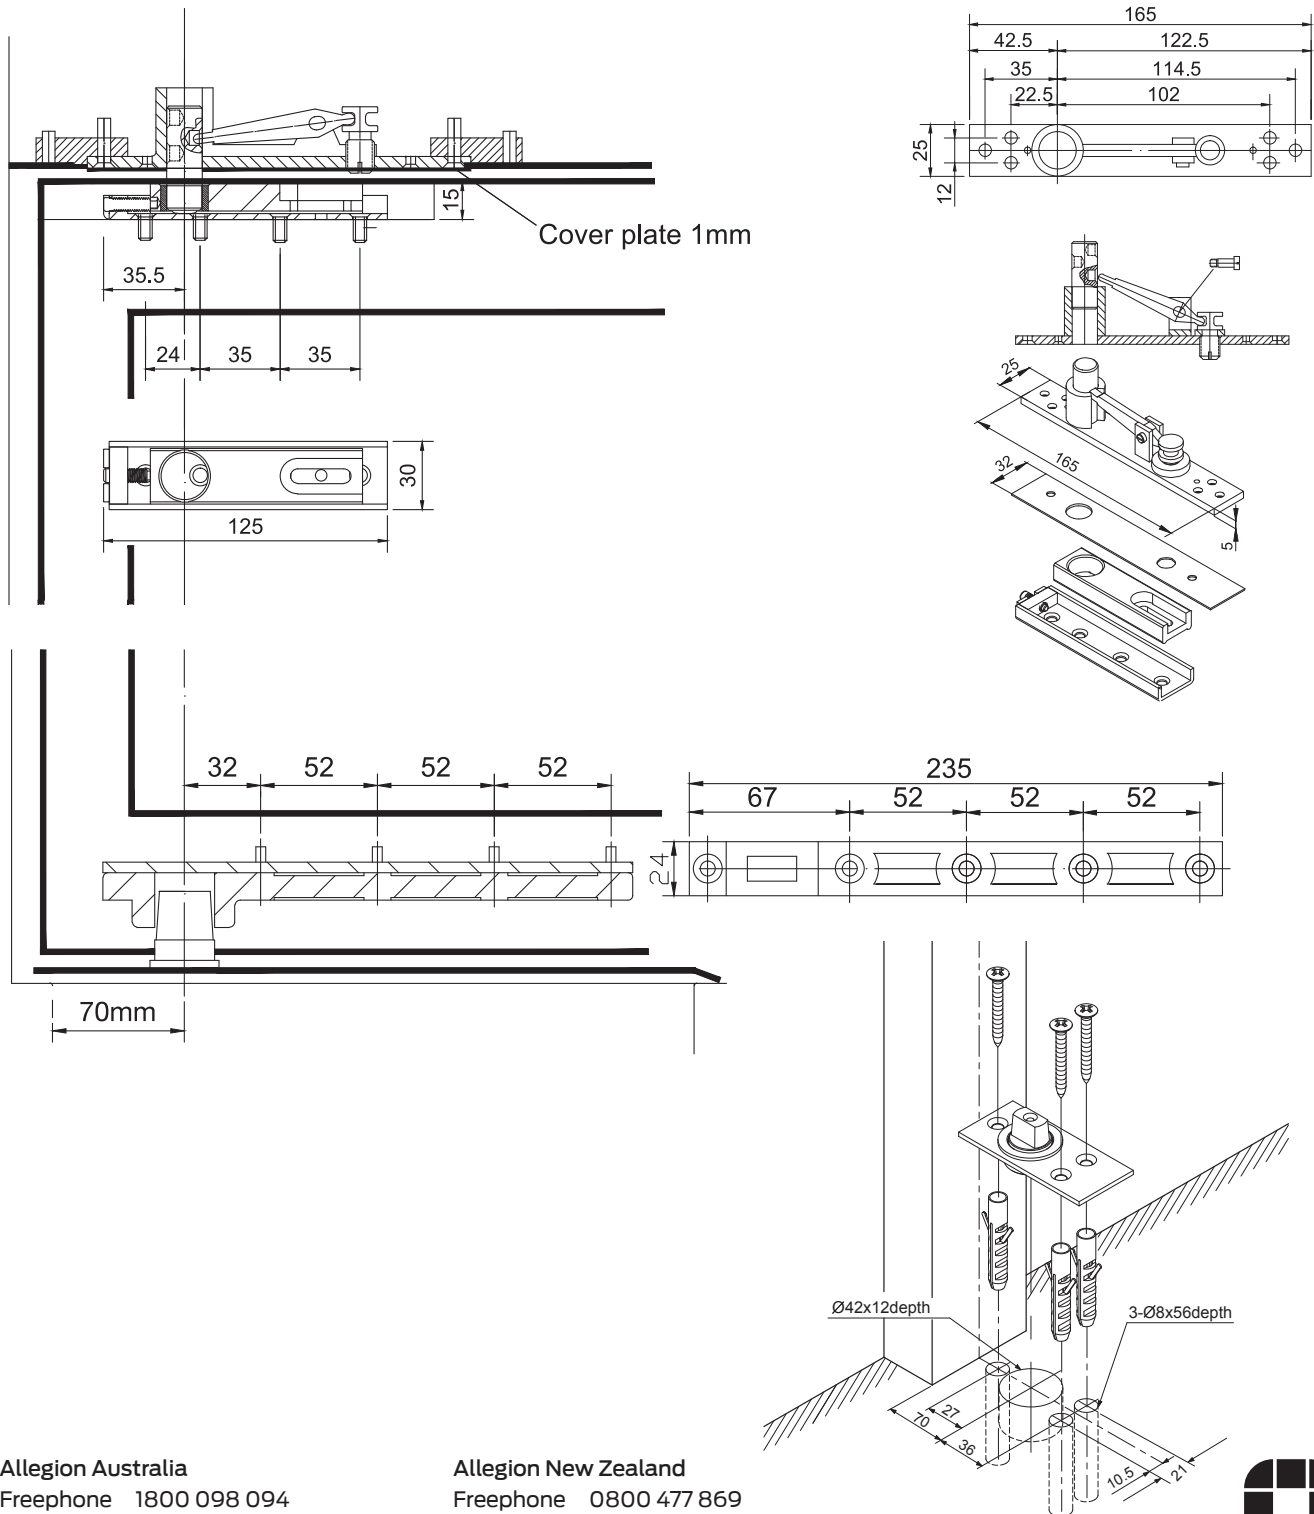

Allegion Australia  
Freephone 1800 098 094  
Freefax 1800 098 095  
Email [auinfo@allegion.com](mailto:auinfo@allegion.com)  
[www.allegion.com.au](http://www.allegion.com.au)

Allegion New Zealand  
Freephone 0800 477 869  
Freefax 0800 477 868  
Email [nzinfo@allegion.com](mailto:nzinfo@allegion.com)  
[www.allegion.co.nz](http://www.allegion.co.nz)

© 2015 Allegion

