



CAR DVR HD SECURITY CAMERA

CONNECT WITH US ONLINE TO EXPLORE NAKAMICH'S COMPLETE RANGE.
INSTRUCTIONS & SOFTWARE DOWNLOADS AND WARRANTY REGISTRATION.

WWW.NAKAMICHICARAUDIO.COM

and nakamichi.global nakamichi.caraudio WWW.NAKAMICHICARAUDIO.COM

2.行駛時請不要操作本產品或使用輔助駕駛掌控APP;

4.請勿在強磁場或劇烈震動的環境中使用本產品;

. the dash cam can only be installed on the vehicle for use;

2. please do not operate this product while driving;

and store the product;

inforeseen problems;

magnetic field or violent vibration;

output current is not less than 1A;

3. avoid using the product under abnormal temperature

4. do not use this product in the environment of strong

5. only the power cord with official configuration can be

used. The use of non-standard power cord may cause

6. The product is sold without a power adapter when it

that has passed CCC certification and meets the

leaves the factory. The user must select a power adapter

requirements of gb8898 standard when it is actually used.

The output voltage of the power adapter is 5VDC and the

7. It is forbidden for the user to disassemble or replace

the battery without permission. If the battery has to be

the product. Only professionals are allowed to replace

replaced, please contact the dealer or manufacturer of

he battery with the same type or equivalent type. The

pattery (battery pack or combination battery) shall not

be exposed to the sun, baking or similar overheated

8. Warning: in the living environment, running this

equipment may cause radio interference.

親愛的用戶朋友,感謝您選購本公司產品,首次使用請仔 細閱讀以下說明,謝謝。

記錄儀使用前,請將TF卡在本機上格式化。

1.記錄儀僅限安裝在車上使用;

3.避免在異常溫度下使用,存放本產品;









Note: Please refer to the actual appearance

this system. If you use this system, you will be deemed to be bound by the following terms of this statement and

bear the consequences caused by non-standard use. 1. This product is used as a driving aid product. If it relies too much on this system, it may cause traffic accidents; 2. Due to the large angle of view of the camera, the image display of this product is different from the real environment. Please use it carefully;

avoid damage and fire alarm;

the machine during video recording;

is easy to cause a lack of merchants.

loss of the last video file;

Installation guide

1 . Turn off the car engine;

In particular, users are reminded to carefully read and

fully understand the terms of this statement before using

7. illegal power failure in the video will cause damage or

8. Damage or loss of video due to destructive collision of

9. The memory card needs to use 120mb/s high-speed

brand memory card. The quality of the memory card

determines the video quality and the stability guarantee

of the video storage system. The non brand memory card

1. 本產品屬於駕駛輔助性產品,如過分依賴本系統,可能造


①B+yellow line, connected to DC-12V power supply, which is 3. Do not operate the system at high speed to avoid traffic accidents caused by distraction; 4. Do not replace the special parts of the product without

② The ACC red line is connected to the DC-12V power supply of the ignition control. The power supply is powered on when the ignition is turned on and off; 3GND black wire, connect the ground wire in the car fuse box. the guidance of professional personnel, otherwise the machine will be damaged; 5. Start the engine and check whether the machine has 5. Do not expose the product to wet environment and water to avoid electric shock due to short circuit, and

been installed correctly and whether the video recording function is normal. 6. The output voltage of the host of this product to the outside is 5V. Do not use external power on this host;

level with the ground;

USB interface;



P. Find a proper position on the vehicle and install the

ecorder. The installation position should not affect

the driving, and then wipe the glass at the installation

4. The connection of the power-on version of the fuse box

(with 12V to 5V step-down line) corresponds Interface B+,

ACC GND, another USB interface connected to the main

3. Adjust the lens position to ensure that the lens is

Description of the appearance and


function of the keys

Mobile Internet Bach cam Local Album More APP download and installation Enter the preview interface of the dash cam 4 .Switch icons b 3. Recording icon



a.Enter the phone settings and find the machine WLAN name: Nakamichi-xxxx; b.Enter the password.The password is 1234567890; c.Open the downloaded APP and click to enter; d.App can view image preview, download images and share images;
e. Some function settings can be completed on the mobile phone, and some settings can be completed on the host computer; f. Different mobile phones have different versions.

If abnormal, please disconnect and reconnect.

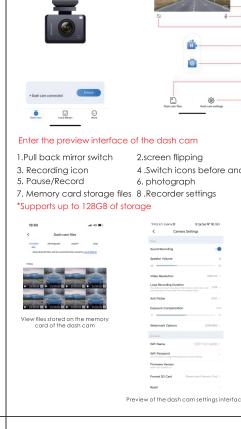

wil on IIII	-		
		Product name	video drive recorder
-1		Color	Black
2			Chinese/English/
Φ3		Language	Traditional, see the
•			machine for details
5		powersupply	12V
6		speaker	support
7		Microphone	support
}		Loop recording	supports loop recordin
nsettings		Abnormalreminder	Support
		G-sensor gravity sensing	Support
		Memory card	TF (up to 128GB)
fore and after		Parking monitoring	support (optional step-down line)
js		Rear camera	support (optional)
js		Single recording resolution	3840X2160P
R (II)		Dual recording resolution	2560PX1440P + 1920X1080
-		Rear camera	support (optional)
•	W	arm reminder	
- o	Th	e 24-hour parking monitoring	g uses the vehicle battery
910)	рс	wer supply, which will cons	ume a certain amount of
1999 >	battery power. If the vehicle battery exceeds one and o		
+0.0	half years or the parking monitoring There are some		
- 0	CC	ncerns about controlling the	e battery power consump
4440	Ple	ease turn off the video parki	ng monitoring function.
l-latin-	_		

Product specifications

rking monitoring uses the vehicle battery hich will consume a certain amount of f the vehicle battery exceeds one and a e parking monitoring There are some t controlling the battery power consumption the video parking monitoring function. Description of video recording

1.Under 12V voltage, the default setting for time-lapse recording is off, turn off the car engine, the recorder normal

shutdown. Set time-lapse recording to On, turn off the car

2.低電保護; 汽車熄火後在低電(11.6~11.8V)情況下,機器正常關機, 進入低電保護狀態。汽車重新發動後,機器開機並進入常規

如果您在使用以及安裝過程中有遇到任何問題,第一時間聯 系我司技術人員; 4.感謝您的選購,如果您對產品有任何改進建議,聯系我司, 謝謝。

温馨提示

3.技術支持;

常見問題解答: Q1: 為什麼要格式化內存卡? 多久格式化一次? 答:定期格式化能有效防止數據丟失正常使用情況下, 建議每個月定期格式化一次,格式化前請先將所有數

答:在主機設置菜單,格式化選項,點擊格式化,確認格

Nakamichi 產品配置 後攝像頭 後拉線 3M固定膠 說明書

Nakamichi

註意事項 production configuration



5.僅限官方配置的電源線,使用非標配的電源線可能會引起 無法預見的問題; 6.產品出廠時不配電源適配器銷售,用戶實際使用時必須選 用通過CCC認證並滿足GB8898標準要求的電源適配器,電源 適配器輸出電壓5Vdc,輸出電流不低於1A; 7.禁止用戶私自拆卸或更換電池等操作,如果電池更換不當

> 或烤或類似過熱環境中; 8.警告:在居住環境中,運行此設備可能會造成無線電幹擾。

會有爆炸危險,如果必須更換電池,請聯系本產品的經銷商

或者製造商,並只允許專業人員采用同樣類型或等效類型的

電池來更換,電池(電池包或組合電池)不得暴露在諸如日照,

免責聲明

在此特別提醒用戶,在使用本系統前請認真閱讀,充分理 解本聲明中各項條款,如果您使用本系統,將被視為認可接受 本聲明以下各項條款的約束,同時承擔由於不規範使用引發 的後果。

成交通事故; 2.因攝像頭視角較大,本產品的圖像顯示與真實環境有一定 的差異,請小心使用; 3. 高速駕駛時不要操作本系統以免因註意力分散導致交通事故 4. 在沒有專業人員的指導下,切勿私自更換產品零部件,否 則會導致本機損壞;

5.禁止將本產品置於淋濕的環境和水中,以免因短路引起觸 電,不必要的損壞和火警發生; 6. 本產品主機對外輸出的電壓為5V,請勿使用外部電源在此 主機上使用; 7. 錄像中非法斷電, 會導致最後一個視頻檔案損壞或者丟失;

8. 錄像過程中機器遭受破壞性碰撞導致錄像的視頻損壞或丟失; 9. 內存卡需要使用120MB/S高速品牌內存卡,內存卡的品質決定錄 像品質及錄像存儲穩定性保障,雜牌內存卡容易造成 視頻不保存。 安裝指南

1.關閉汽車發動機;

2.在車上找到適當的位置,安裝記錄儀,安裝位置以 不影響駕駛為宜,然後把安裝位置的玻璃擦拭幹凈; 3.調整鏡頭位置,確保鏡頭與地面保持水平; 4.保險盒取電版本(帶 12V 轉 5V 降壓線)連接對應 的接口B+,ACC,GND,另外一頭USB接口連接主 機 USB接口;

註: ①B+黃線,連接到DC-12V電源上,該電源始終處於通電狀態; ②ACC紅線,連接到點火控製DC-12V電源上,該電源打火通電, 熄火斷電; ③GND黑線,連接汽車保險盒內地線。

5.發動引擎,檢查機器是否已安裝正確,錄像功能是

手機互聯

APP下载与安装 a:進入手機設置,找到機器WLAN名 稱:Nakamichi-xxxx; b:輸入密碼,密碼為1234567890; c:打開下載好的APP,點擊進入; d:App可以查看圖像預覽,下載圖像, 分享圖像;










記錄儀設置界面預覽

雙錄分辨率 後拉攝像頭

24小時停車監控采用的是車輛電瓶供電,會消耗電瓶一定電 量,如果車身電瓶超過一年半以上或者對停車監控消耗電瓶電 量有一定顧慮,請關閉縮時錄像停車監控功能。

1.在12V電壓下,縮時錄像默認設置為關,關閉汽車發動機, 記錄儀正常關機。設置縮時錄像為開,關閉汽車發動機,記 錄儀自動進入24小時監控縮時錄影屏保狀態,錄像文件為 一秒一幀,接近卡滿時,記錄儀自動刪除舊文件,循環覆蓋 錄像,不漏幀、漏秒; 汽車重新發動後,記錄儀亮屏並進入常規錄影。每段縮時錄 影時長與菜單設置的循環錄影時長一致,一分鐘記錄正常 時間下30分鐘的視頻,三分鐘記錄正常時間下3×30分鐘的

產品名稱	車載行車記錄儀
顏色	黑色
語言	中文/英文/繁體,詳見機器
電源	12V
揚聲器	支持
麥克風錄音	支持
循環錄像	支持循環錄像
異常語音播報提醒	支持
G-sensor重力感應	支持
存儲卡	TF (最大支持 128GB)
停車監控	支持
縮時錄影	支持
單錄分辨率	3840X2160P





產品規格 2560PX1440P + 1920X1080P

縮時錄像工作說明



engine, the recorder automatically enters the 24-hour

onitoring time-lapse recording screen saver state, the video

file is one frame per second, when the card is close to full, the

recorder automatically deletes the old file, cyclic coverage

of the video, without missing frames and seconds; after the

car is restarted, the recorder lights up the screen and enters

recording is the same as the loop recording length set in the

menu, one minute records 30 minutes of video under normal

time, three minutes records 3 x 30 minutes of video under

After the car is switched off at low power (11.6~11.8V), the

protection state. After the car is restarted, the machine turns

machine shuts down normally and enters the low power

If you encounter any problems during use and installation,

suggestions for improvement, please contact us, Thank

contact department of our technical personnel.

4. Thank you for your purchase. If you have any

Q1: Why format the memory card? How often is it

Q2: How to format a memory card?

that the format is completed.

formatted? A: regular formatting can effectively prevent

Under normal use, it is recommended to format it regularly

every month. Before formatting, please back up all data.

Answer: in the host setting menu, click format to confirm

2.Low power protection.

3. Technical support.

Warm reminder

on and enters regular recording.

the regular recording. The length of each time-lapse