



SS-CX23

AGM Stop-start Auxiliary Battery


** For Land Rover, Range Rover & Jaguar*

Physical Specification


Nominal Voltage		12V
Nominal Capacity (20HR)		14AH
Dimension	Length	150 ± 2mm (5.91 inches)
	Width	87 ± 2mm (3.43 inches)
	Container Height	145 ± 2mm (5.71 inches)
	Total Height (with Terminal)	145 ± 2mm (5.71 inches)
Weight	Battery(with acid): Approx 4.71kg (10.37lbs)	
	Electrolyte: Approx 0.92kg (2.03lbs)	

- * Sealed and non-spillable AGM battery
- * Maintenance-free
- * Powerful **380** cold cranking amps
- * Shipped pre-charged and ready to install
- * Replaces none battery

Dimensions (mm)

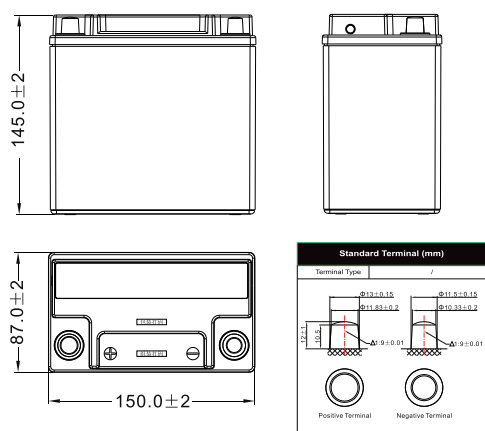

Discharge Characteristics (25°C, 77°F)

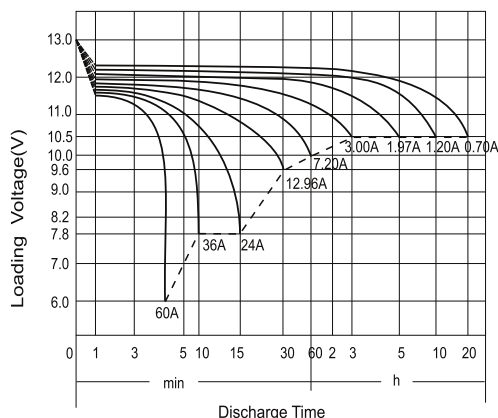

Electrical Specification

Rated Capacity	20 hour rate (0.70 A)	14.00AH
	10 hour rate (1.20 A)	12.00AH
	5 hour rate (1.97 A)	9.84AH
	2 hour rate (4.20 A)	8.40AH
	1 hour rate (7.20 A)	7.20AH
	0.5 hour rate (12.96 A)	6.48AH
Capacity affected by Temperature	40 °C (104 °F) 25 °C (77 °F) 0 °C (32 °F) -15 °C (5 °F)	106% 100% 86% 65%
Self Discharge	Approximately 3% per month (25°C (77°F))	
Charging Methods	Full Charge	Constant-Voltage Charge: Initial charging current: less than 3.6A Voltage: 14.40 V ~ 15.00 V at 25 °C (77 °F) Charging time: 15 ~18h Constant-Current Charge: Charging current: 0.1C ₁₀ =1.20A, when charging voltage up to 14.40V, continue to charge 4h
	Floating Charge	No limit on Initial charging current Voltage: 13.50