

A close-up, high-speed photograph of a Gühring INOX drill bit. The bit is a multi-flute design, appearing to be made of a dark, possibly coated material. It is positioned vertically, with its tip just above a surface of water. A large, dynamic splash of water is erupting from the point of contact, with many droplets frozen in mid-air, creating a bokeh effect in the background. The lighting is bright, highlighting the metallic surfaces of the drill bit and the texture of the water.

GÜHRING

INOX

High-performance tools for
economical machining of stainless steel

EXPERTS IN STAINLESS STEEL

Our tool range for maximum efficiency in stainless steel machining

If you need to ensure corrosion- and acid resistance, then the answer is always stainless steel. Regardless of whether you're in the food, automotive, medical or energy technology sector – every industry relies on the high durability of the ISO M material group. However, their toughness and low thermal conductivity make them tricky materials to machine.

This is where you need specialists who have been precisely developed for machining stainless steels: Our new high-performance tools for stainless steel machining. Thanks to their special coatings, the tools can withstand high thermal loads for significantly longer, while their carbide substrate offers the perfect ratio of hardness-to-toughness. At the same time, the adapted geometry is able to deliver the highest cutting values, which ensure maximum economic efficiency, especially in medium and large-scale batch production.



shorter cycle times

thanks to higher potential feed rates in the production of holes & threads



longer tool life

with high and conventional cutting data, thanks to extra hard coatings



greater economic efficiency

by reducing the cost-per-part for high quantities



maximum process reliability

geometry prevents built-up edges & ensures the ideal chip flow

SUCCESS STORY

GÜHRING

Success is engraved in the story of this Gühring drill: The RT 100 InoxPro did what it was built to do in this material, delivering fantastic results where other drills have failed.

Daniel Schultes

Machining highly heat-resistant steels and stainless steels is the core business of Recker Technik GmbH. With 20 employees and a modern machinery at its site in Eschweiler, the contract supplier produces metal parts for various customers ranging from the food industry to mechanical engineering. For a long time, universal drills made by a competitor were used – until a check valve for a gas pipeline presented a challenge for the machining experts.

In the highly heat-resistant steel (1.4825), tool wear is immense, as production manager Daniel Schultes remembers: “After every single hole, the drill tip was blunt.” A material specialist was what was needed – and Gühring sales representative Karsten Raßbach had the ideal one in mind: “With this material, I immediately opted for the RT 100 InoxPro because I had already achieved very good results for other customers.”

The solid carbide drill also impressed Recker: One single drill can create 64 holes with a depth of 30 mm before it starts to show the first signs of wear. For Schultes, this was proof: “I’ve been in metalworking for 16 years and like any machining engineer in this field, I know: When it comes to drilling, Gühring is number one.”



Karsten Raßbach

Gühring

Kevin Schippers & Daniel Schultes

Recker Technik

Scan the QR code to read the full success story!



CONTENTS

Micro drill InoxPro

with maximum feeds for perfect micro drilling results

Solid carbide drill InoxPro

70 % shorter cycle time in difficult-to-machine materials

High-performance tap Pionex

with low torque for dimensionally stable threads

new

High-performance fluteless tap InoxPro

50 % longer tool life for maximum process reliability




from page 6



from page 14



from page 22

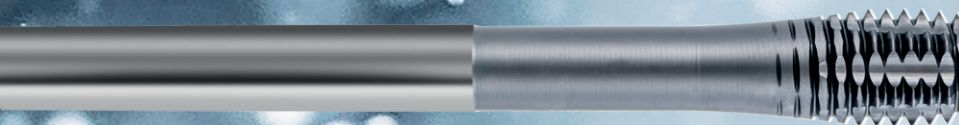

from page 28



A close-up photograph of a person wearing a white surgical glove, holding a long, thin surgical instrument (likely a grasper or forceps) over a metal tray. The tray contains several other surgical instruments, including various types of forceps and scissors. The background is a blurred blue, suggesting a sterile medical environment. A large yellow vertical bar is positioned on the left side of the image, containing text.

Holes in the
handle
of a medical instrument

Industry:
Medical technology

Material:
1.4021/X20Cr13

Target:
To reduce the machining time with
absolute process reliability

The challenge

Polished surfaces are a must-have for all medical devices. This is the only way to prevent bacteria and viruses from settling on the surface. So, this instrument for minimally invasive surgery is also made of martensitic, stainless chrome steel. The material is not only very easy to polish, but also resistant to chemicals and acids.

However, one problem is that high temperatures develop at the tool's cutting edge when drilling into this material, which can promote abrasive wear. This is particularly problematic in fully automated production, where high process reliability and therefore consistently high tool lives are required.

Micro drill InoxPro

TOP-PERFORMANCE MICRO-PRECISION DRILL

Tool solution

The RT 100 InoxPro Micro is our high-end micro drill for machining stainless steels, special alloys and titanium. The optimised geometry with a concave main cutting edge helps to deliver an aggressive cutting behaviour. In this way, the micro-precision drill produces short chips even in long-chipping materials, making it easier for the chips to be removed.

At the same time, the Perrox coating protects the tool from abrasive alloy components and prevents built-up edges. As a result, the micro drill achieves the highest feed rates with very long and reliable tool lives.

TOOL PERFORMANCE REPORT



	Competitors' tool	RT 100 InoxPro micro
Number of cutting edges	2	2
Diameter ($\varnothing$)	2.00 mm	2.00 mm
Cutting speed (v_c)	60 m/min	80 m/min
Speed (n)	9,549 rev/min	12,732 rev/min
Feed (f)	0.03 mm/rev	0.05 mm/rev
Feed rate (v_f)	286 mm/min	637 mm/min
Drilling depth (a_p)	20.8 mm	20.8 mm
Machining time per hole	5.9 sec.	3.5 sec.

40 % shorter cycle time


35 % longer tool life

RT 100
INOXPRO





Web thinning $\geq \varnothing 0.500$ • facet point grind • main cutting edge is slightly concave • optimised cutting edge geometry

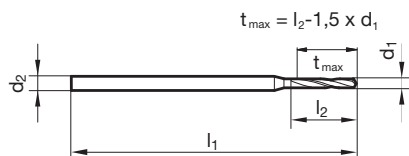

$$t_{\max} = l_2 - 1,5 \times d_1$$

Article no.

6487

Article no.



6487

d1 mm	d2 h6 mm	l1 mm	l2 mm	Order no.
0.500	3.0	38.0	2.8	6487 0.500
0.550	3.0	38.0	3.1	6487 0.550
0.600	3.0	38.0	3.3	6487 0.600
0.650	3.0	38.0	3.6	6487 0.650
0.660	3.0	38.0	3.7	6487 0.660
0.700	3.0	38.0	3.9	6487 0.700
0.740	3.0	38.0	4.1	6487 0.740
0.750	3.0	38.0	4.2	6487 0.750
0.790	3.0	38.0	4.4	6487 0.790
0.800	3.0	38.0	4.4	6487 0.800
0.820	3.0	38.0	4.6	6487 0.820
0.850	3.0	38.0	4.7	6487 0.850
0.900	3.0	38.0	5.0	6487 0.900
0.950	3.0	38.0	5.3	6487 0.950
1.000	3.0	38.0	5.5	6487 1.000
1.020	3.0	38.0	5.7	6487 1.020
1.050	3.0	38.0	5.8	6487 1.050
1.100	3.0	38.0	6.1	6487 1.100
1.150	3.0	38.0	6.4	6487 1.150
1.180	3.0	38.0	6.5	6487 1.180
1.190	3.0	38.0	6.6	6487 1.190
1.200	3.0	38.0	6.6	6487 1.200
1.250	3.0	38.0	6.9	6487 1.250
1.280	3.0	38.0	7.1	6487 1.280
1.300	3.0	38.0	7.2	6487 1.300
1.350	3.0	38.0	7.5	6487 1.350
1.400	4.0	46.0	7.7	6487 1.400
1.450	4.0	46.0	8.0	6487 1.450
1.460	4.0	46.0	8.1	6487 1.460
1.500	4.0	46.0	8.3	6487 1.500
1.550	4.0	46.0	8.6	6487 1.550
1.560	4.0	46.0	8.6	6487 1.560
1.590	4.0	46.0	8.8	6487 1.590
1.600	4.0	46.0	8.8	6487 1.600
1.650	4.0	46.0	9.1	6487 1.650
1.660	4.0	46.0	9.2	6487 1.660

d1 mm	d2 h6 mm	l1 mm	l2 mm	Order no.
1.700	4.0	46.0	9.4	6487 1.700
1.750	4.0	46.0	9.7	6487 1.750
1.800	4.0	46.0	9.9	6487 1.800
1.850	4.0	46.0	10.2	6487 1.850
1.900	4.0	46.0	10.5	6487 1.900
1.950	4.0	46.0	10.8	6487 1.950
1.980	4.0	46.0	10.9	6487 1.980
2.000	4.0	46.0	11.0	6487 2.000
2.050	4.0	46.0	11.3	6487 2.050
2.100	4.0	50.0	11.6	6487 2.100
2.150	4.0	50.0	11.9	6487 2.150
2.200	4.0	50.0	12.1	6487 2.200
2.250	4.0	50.0	12.4	6487 2.250
2.300	4.0	50.0	12.7	6487 2.300
2.350	4.0	50.0	13.0	6487 2.350
2.380	4.0	50.0	13.1	6487 2.380
2.400	4.0	50.0	13.2	6487 2.400
2.450	4.0	50.0	13.5	6487 2.450
2.500	4.0	50.0	13.8	6487 2.500
2.550	4.0	50.0	14.1	6487 2.550
2.600	4.0	50.0	14.3	6487 2.600
2.650	4.0	50.0	14.6	6487 2.650
2.700	4.0	50.0	14.9	6487 2.700
2.750	4.0	50.0	15.2	6487 2.750
2.780	4.0	50.0	15.3	6487 2.780
2.800	4.0	50.0	15.4	6487 2.800
2.850	4.0	50.0	15.7	6487 2.850
2.900	4.0	50.0	16.0	6487 2.900
2.950	4.0	50.0	16.3	6487 2.950
3.000	4.0	50.0	16.5	6487 3.000



Micro-precision drills with coolant ducts

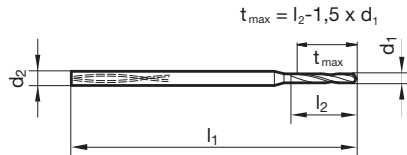Article no. **6488**Web thinning $\geq \varnothing 1.000$ • facet point grind • main cutting edge is slightly concave • optimised cutting edge geometry

$$t_{\max} = l_2 - 1,5 \times d_1$$

Article no.

6488

Article no.

6488

d1 mm	d2 h6 mm	l1 mm	l2 mm
1.000	3.0	38.0	5.5
1.020	3.0	38.0	5.7
1.050	3.0	38.0	5.8
1.100	3.0	38.0	6.1
1.150	3.0	38.0	6.4
1.180	3.0	38.0	6.5
1.190	3.0	38.0	6.6
1.200	3.0	38.0	6.6
1.250	3.0	38.0	6.9
1.280	3.0	38.0	7.1
1.300	3.0	38.0	7.2
1.350	3.0	38.0	7.5
1.400	4.0	46.0	7.7
1.450	4.0	46.0	8.0
1.460	4.0	46.0	8.1
1.500	4.0	46.0	8.3
1.550	4.0	46.0	8.6
1.560	4.0	46.0	8.6
1.590	4.0	46.0	8.8
1.600	4.0	46.0	8.8
1.650	4.0	46.0	9.1
1.660	4.0	46.0	9.2
1.700	4.0	46.0	9.4
1.750	4.0	46.0	9.7
1.800	4.0	46.0	9.9
1.850	4.0	46.0	10.2
1.900	4.0	46.0	10.5
1.950	4.0	46.0	10.8
1.980	4.0	46.0	10.9
2.000	4.0	46.0	11.0

Order no.
6488 1.000
6488 1.020
6488 1.050
6488 1.100
6488 1.150
6488 1.180
6488 1.190
6488 1.200
6488 1.250
6488 1.280
6488 1.300
6488 1.350
6488 1.400
6488 1.450
6488 1.460
6488 1.500
6488 1.550
6488 1.560
6488 1.590
6488 1.600
6488 1.650
6488 1.660
6488 1.700
6488 1.750
6488 1.800
6488 1.850
6488 1.900
6488 1.950
6488 1.980
6488 2.000



d1 mm	d2 h6 mm	l1 mm	l2 mm
2.050	4.0	46.0	11.3
2.100	4.0	50.0	11.6
2.150	4.0	50.0	11.9
2.200	4.0	50.0	12.1
2.250	4.0	50.0	12.4
2.300	4.0	50.0	12.7
2.350	4.0	50.0	13.0
2.380	4.0	50.0	13.1
2.400	4.0	50.0	13.2
2.450	4.0	50.0	13.5
2.500	4.0	50.0	13.8
2.550	4.0	50.0	14.1
2.600	4.0	50.0	14.3
2.650	4.0	50.0	14.6
2.700	4.0	50.0	14.9
2.750	4.0	50.0	15.2
2.780	4.0	50.0	15.3
2.800	4.0	50.0	15.4
2.850	4.0	50.0	15.7
2.900	4.0	50.0	16.0
2.950	4.0	50.0	16.3
3.000	4.0	50.0	16.5

Order no.
6488 2.050
6488 2.100
6488 2.150
6488 2.200
6488 2.250
6488 2.300
6488 2.350
6488 2.380
6488 2.400
6488 2.450
6488 2.500
6488 2.550
6488 2.600
6488 2.650
6488 2.700
6488 2.750
6488 2.780
6488 2.800
6488 2.850
6488 2.900
6488 2.950
6488 3.000




Micro-precision drills with coolant ducts

Article no. **6489**



Web thinning $\geq \varnothing 1.000$ • facet point grind • main cutting edge is slightly concave • optimised cutting edge geometry

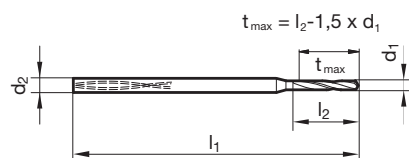

$$t_{\max} = l_2 - 1,5 \times d_1$$

Article no.

6489

Article no.

6489

d1 mm	d2 h6 mm	l1 mm	l2 mm
1.000	3.0	48.0	9.0
1.050	3.0	48.0	9.5
1.100	3.0	48.0	9.9
1.150	3.0	48.0	10.4
1.190	3.0	48.0	10.8
1.200	3.0	51.0	10.8
1.250	3.0	51.0	11.3
1.300	3.0	51.0	11.7
1.350	3.0	51.0	12.2
1.400	4.0	56.0	12.6
1.450	4.0	56.0	13.1
1.500	4.0	56.0	13.5
1.550	4.0	56.0	14.0
1.590	4.0	56.0	14.4
1.600	4.0	56.0	14.4
1.650	4.0	56.0	14.9
1.700	4.0	61.0	15.3
1.750	4.0	61.0	15.8
1.800	4.0	61.0	16.2
1.850	4.0	61.0	16.7
1.900	4.0	61.0	17.1
1.950	4.0	61.0	17.6
1.980	4.0	61.0	17.9
2.000	4.0	61.0	18.0



Order no.
6489 1.000
6489 1.050
6489 1.100
6489 1.150
6489 1.190
6489 1.200
6489 1.250
6489 1.300
6489 1.350
6489 1.400
6489 1.450
6489 1.500
6489 1.550
6489 1.590
6489 1.600
6489 1.650
6489 1.700
6489 1.750
6489 1.800
6489 1.850
6489 1.900
6489 1.950
6489 1.980
6489 2.000

d1 mm	d2 h6 mm	l1 mm	l2 mm
2.050	4.0	61.0	18.5
2.100	4.0	66.0	18.9
2.150	4.0	66.0	19.4
2.200	4.0	66.0	19.8
2.250	4.0	66.0	20.3
2.300	4.0	66.0	20.7
2.350	4.0	66.0	21.2
2.380	4.0	66.0	21.5
2.400	4.0	66.0	21.6
2.450	4.0	66.0	22.1
2.500	4.0	66.0	22.5
2.550	4.0	66.0	23.0
2.600	4.0	71.0	23.4
2.650	4.0	71.0	23.9
2.700	4.0	71.0	24.3
2.750	4.0	71.0	24.8
2.780	4.0	71.0	25.1
2.800	4.0	71.0	25.2
2.850	4.0	71.0	25.7
2.900	4.0	71.0	26.1
2.950	4.0	71.0	26.6
3.000	4.0	71.0	27.0

Order no.
6489 2.050
6489 2.100
6489 2.150
6489 2.200
6489 2.250
6489 2.300
6489 2.350
6489 2.380
6489 2.400
6489 2.450
6489 2.500
6489 2.550
6489 2.600
6489 2.650
6489 2.700
6489 2.750
6489 2.780
6489 2.800
6489 2.850
6489 2.900
6489 2.950
6489 3.000



Micro-precision drills with coolant ducts

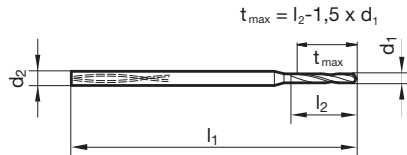Article no. **6490**Web thinning $\geq \varnothing 1.000$ • facet point grind • main cutting edge is slightly concave • optimised cutting edge geometry

Article no.

6490

Article no.

6490

d1 mm	d2 h6 mm	l1 mm	l2 mm
1.000	3.0	48.0	13.0
1.050	3.0	48.0	13.7
1.100	3.0	48.0	14.3
1.150	3.0	48.0	15.0
1.190	3.0	48.0	15.5
1.200	3.0	51.0	15.6
1.250	3.0	51.0	16.3
1.300	3.0	51.0	16.9
1.350	3.0	51.0	17.6
1.400	4.0	56.0	18.2
1.450	4.0	56.0	18.9
1.500	4.0	56.0	19.5
1.550	4.0	56.0	20.2
1.590	4.0	56.0	20.7
1.600	4.0	56.0	20.8
1.650	4.0	56.0	21.5
1.700	4.0	61.0	22.1
1.750	4.0	61.0	22.8
1.800	4.0	61.0	23.4
1.850	4.0	61.0	24.1
1.900	4.0	61.0	24.7
1.950	4.0	61.0	25.4
1.980	4.0	61.0	25.8
2.000	4.0	61.0	26.0

Order no.
6490 1.000
6490 1.050
6490 1.100
6490 1.150
6490 1.190
6490 1.200
6490 1.250
6490 1.300
6490 1.350
6490 1.400
6490 1.450
6490 1.500
6490 1.550
6490 1.590
6490 1.600
6490 1.650
6490 1.700
6490 1.750
6490 1.800
6490 1.850
6490 1.900
6490 1.950
6490 1.980
6490 2.000



d1 mm	d2 h6 mm	l1 mm	l2 mm
2.050	4.0	61.0	26.7
2.100	4.0	66.0	27.3
2.150	4.0	66.0	28.0
2.200	4.0	66.0	28.6
2.250	4.0	66.0	29.3
2.300	4.0	66.0	29.9
2.350	4.0	66.0	30.6
2.380	4.0	66.0	31.0
2.400	4.0	66.0	31.2
2.450	4.0	66.0	31.9
2.500	4.0	66.0	32.5
2.550	4.0	66.0	33.2
2.600	4.0	71.0	33.8
2.650	4.0	71.0	34.5
2.700	4.0	71.0	35.1
2.750	4.0	71.0	35.8
2.780	4.0	71.0	36.2
2.800	4.0	71.0	36.4
2.850	4.0	71.0	37.1
2.900	4.0	71.0	37.7
2.950	4.0	71.0	38.4
3.000	4.0	71.0	39.0

Order no.
6490 2.050
6490 2.100
6490 2.150
6490 2.200
6490 2.250
6490 2.300
6490 2.350
6490 2.380
6490 2.400
6490 2.450
6490 2.500
6490 2.550
6490 2.600
6490 2.650
6490 2.700
6490 2.750
6490 2.780
6490 2.800
6490 2.850
6490 2.900
6490 2.950
6490 3.000




Micro-precision drills with coolant ducts

Article no. **6491**



Web thinning $\geq \varnothing 1.000$ • facet point grind • main cutting edge is slightly concave • optimised cutting edge geometry

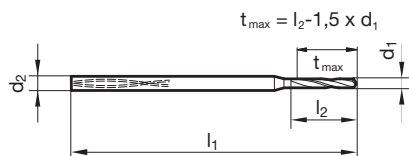

$$t_{\max} = l_2 - 1,5 \times d_1$$

Article no.

6491

Article no.

6491

d1 mm	d2 h6 mm	l1 mm	l2 mm	Order no.
1.000	3.0	54.0	18.0	6491 1.000
1.050	3.0	54.0	18.9	6491 1.050
1.100	3.0	54.0	19.8	6491 1.100
1.150	3.0	54.0	20.7	6491 1.150
1.190	3.0	54.0	21.5	6491 1.190
1.200	3.0	58.0	21.6	6491 1.200
1.250	3.0	58.0	22.5	6491 1.250
1.300	3.0	58.0	23.4	6491 1.300
1.350	3.0	58.0	24.3	6491 1.350
1.400	4.0	64.0	25.2	6491 1.400
1.450	4.0	64.0	26.1	6491 1.450
1.500	4.0	64.0	27.0	6491 1.500
1.550	4.0	64.0	27.9	6491 1.550
1.590	4.0	64.0	28.7	6491 1.590
1.600	4.0	64.0	28.8	6491 1.600
1.650	4.0	64.0	29.7	6491 1.650
1.700	4.0	71.0	30.6	6491 1.700
1.750	4.0	71.0	31.5	6491 1.750
1.800	4.0	71.0	32.4	6491 1.800
1.850	4.0	71.0	33.3	6491 1.850
1.900	4.0	71.0	34.2	6491 1.900
1.950	4.0	71.0	35.1	6491 1.950
1.980	4.0	71.0	35.7	6491 1.980
2.000	4.0	71.0	36.0	6491 2.000

d1 mm	d2 h6 mm	l1 mm	l2 mm	Order no.
2.050	4.0	71.0	36.9	6491 2.050
2.100	4.0	79.0	37.8	6491 2.100
2.150	4.0	79.0	38.7	6491 2.150
2.200	4.0	79.0	39.6	6491 2.200
2.250	4.0	79.0	40.5	6491 2.250
2.300	4.0	79.0	41.4	6491 2.300
2.350	4.0	79.0	42.3	6491 2.350
2.380	4.0	79.0	42.9	6491 2.380
2.400	4.0	79.0	43.2	6491 2.400
2.450	4.0	79.0	44.1	6491 2.450
2.500	4.0	79.0	45.0	6491 2.500
2.550	4.0	79.0	45.9	6491 2.550
2.600	4.0	87.0	46.8	6491 2.600
2.650	4.0	87.0	47.7	6491 2.650
2.700	4.0	87.0	48.6	6491 2.700
2.750	4.0	87.0	49.5	6491 2.750
2.780	4.0	87.0	50.1	6491 2.780
2.800	4.0	87.0	50.4	6491 2.800
2.850	4.0	87.0	51.3	6491 2.850
2.900	4.0	87.0	52.2	6491 2.900
2.950	4.0	87.0	53.1	6491 2.950
3.000	4.0	87.0	54.0	6491 3.000



Onlineshop

- check prices and see if an item is in stock in real time
- download tool data
- automatic reordering thanks to subscription function



Individual authorisation management and maximum access security for your account



Personal purchasing conditions are stored in the system



Provision of CAD data and cutting values



Information on tool availability and stock information



Intelligent search function thanks to advanced search criteria and ordering via own material numbers



Detailed documentation and history of your order processes along with a watch list for future purchases



Easy forwarding of shopping carts for approval and release



OCI interface, data interface

Holes in a

perforated plate

for a heat exchanger

Industry:


Power generation

Material:

SA 240 316L

Target:

Reduction of cycle time but with
a constant tool life

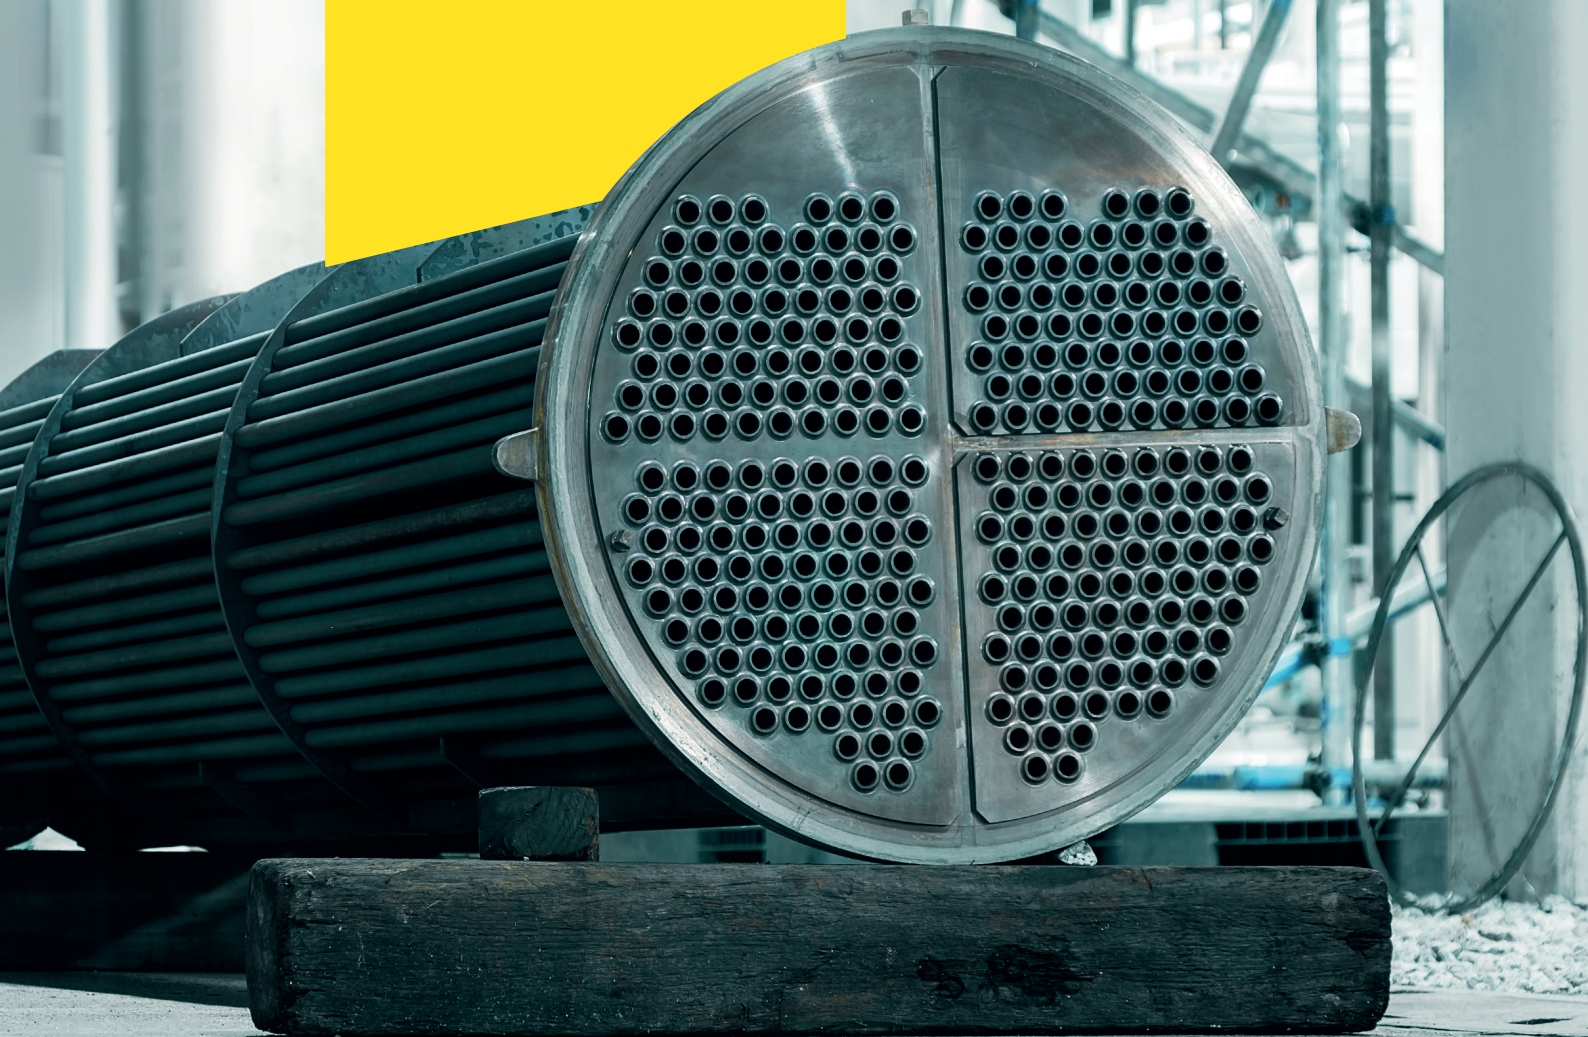

The challenge

In various energy technology systems, heat exchangers transport the heating medium through the pipes, which are consolidated by a perforated plate. Given these circumstances, this component has to be corrosion-resistant and able to withstand temperatures up to 550 °C as well as low temperatures – criteria that are all met by stainless steel.

But when it comes to machining, the material is challenging: When drilling, huge amounts of heat are generated, affecting the tool. In addition, long chips form in the tough material and wrap around the drill. If they stick to the tool's cutting edges, this can result in cutting edge chipping or even tool breakage.

Solid carbide drill InoxPro

MAXIMISE PRODUCTIVITY WITH OUR DRILLING SPECIALIST

Tool solution

Our solid carbide drilling specialist, the RT 100 InoxPro, solves the problem of machining in stainless steel: The new drill geometry with an optimised sickle-shaped cutting edge and the increased taper of the tool minimise the tendency towards jamming in stainless steel and ensure optimum chip control.

As well as the polished flutes, Gühring's own HiPIMS Perrox coating offers very high wear protection. An adapted carbide substrate also ensures that the blade does not break, even under high loads. The result: Maximum process reliability – even with large diameters and deep holes up to 7xD.



TOOL PERFORMANCE REPORT

	Competitors' tool	RT 100 InoxPro
Number of cutting edges	2	2
Diameter (Ø)	12.2 mm	12.2 mm
Cutting speed (v_c)	42 m/min	85 m/min
Speed (n)	1,100 rev/min	2,200 rev/min
Feed (f)	0.11 mm/rev	0.2 mm/rev
Feed rate (v_f)	120 mm/min	440 mm/min
Drilling depth (a_p)	90.5 mm	90.5 mm
Tool life	35 m	35 m
Machining time per hole	45.3 sec.	12.5 sec.


70 % shorter cycle time with the same tool life

RT 100
INOXPRO





Web thinning $\geq \varnothing 3.000$ • maximum performance • optimised cutting edge geometry • main cutting edge is slightly concave • exceptional hole quality

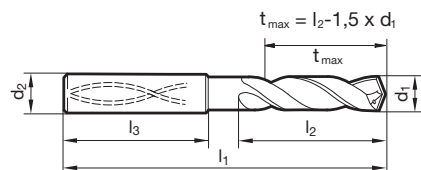

Article no.

8512

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.
3.000		6.0	62.0	20.0	36.0	8512 3.000
3.100		6.0	62.0	20.0	36.0	8512 3.100
3.170	1/8	6.0	62.0	20.0	36.0	8512 3.170
3.200		6.0	62.0	20.0	36.0	8512 3.200
3.250		6.0	62.0	20.0	36.0	8512 3.250
3.300		6.0	62.0	20.0	36.0	8512 3.300
3.400		6.0	62.0	20.0	36.0	8512 3.400
3.500		6.0	62.0	20.0	36.0	8512 3.500
3.570	9/64	6.0	62.0	20.0	36.0	8512 3.570
3.600		6.0	62.0	20.0	36.0	8512 3.600
3.700		6.0	62.0	20.0	36.0	8512 3.700
3.800		6.0	66.0	24.0	36.0	8512 3.800
3.900		6.0	66.0	24.0	36.0	8512 3.900
3.970	5/32	6.0	66.0	24.0	36.0	8512 3.970
4.000		6.0	66.0	24.0	36.0	8512 4.000
4.040		6.0	66.0	24.0	36.0	8512 4.040
4.100		6.0	66.0	24.0	36.0	8512 4.100
4.200		6.0	66.0	24.0	36.0	8512 4.200
4.300		6.0	66.0	24.0	36.0	8512 4.300
4.370	11/64	6.0	66.0	24.0	36.0	8512 4.370
4.400		6.0	66.0	24.0	36.0	8512 4.400
4.500		6.0	66.0	24.0	36.0	8512 4.500
4.600		6.0	66.0	24.0	36.0	8512 4.600
4.650		6.0	66.0	24.0	36.0	8512 4.650
4.700		6.0	66.0	24.0	36.0	8512 4.700
4.760	3/16	6.0	66.0	28.0	36.0	8512 4.760
4.800		6.0	66.0	28.0	36.0	8512 4.800
4.900		6.0	66.0	28.0	36.0	8512 4.900
5.000		6.0	66.0	28.0	36.0	8512 5.000
5.100		6.0	66.0	28.0	36.0	8512 5.100
5.110		6.0	66.0	28.0	36.0	8512 5.110
5.160	13/64	6.0	66.0	28.0	36.0	8512 5.160
5.200		6.0	66.0	28.0	36.0	8512 5.200
5.300		6.0	66.0	28.0	36.0	8512 5.300
5.400		6.0	66.0	28.0	36.0	8512 5.400
5.410		6.0	66.0	28.0	36.0	8512 5.410
5.500		6.0	66.0	28.0	36.0	8512 5.500
5.550		6.0	66.0	28.0	36.0	8512 5.550
5.560	7/32	6.0	66.0	28.0	36.0	8512 5.560
5.600		6.0	66.0	28.0	36.0	8512 5.600
5.700		6.0	66.0	28.0	36.0	8512 5.700
5.800		6.0	66.0	28.0	36.0	8512 5.800
5.900		6.0	66.0	28.0	36.0	8512 5.900
5.950	15/64	6.0	66.0	28.0	36.0	8512 5.950
6.000		6.0	66.0	28.0	36.0	8512 6.000
6.100		8.0	79.0	34.0	36.0	8512 6.100
6.200		8.0	79.0	34.0	36.0	8512 6.200
6.300		8.0	79.0	34.0	36.0	8512 6.300
6.350	1/4	8.0	79.0	34.0	36.0	8512 6.350
6.400		8.0	79.0	34.0	36.0	8512 6.400
6.500		8.0	79.0	34.0	36.0	8512 6.500
6.530		8.0	79.0	34.0	36.0	8512 6.530
6.550		8.0	79.0	34.0	36.0	8512 6.550
6.600		8.0	79.0	34.0	36.0	8512 6.600
6.700		8.0	79.0	34.0	36.0	8512 6.700
6.750	17/64	8.0	79.0	34.0	36.0	8512 6.750
6.800		8.0	79.0	34.0	36.0	8512 6.800
6.900		8.0	79.0	34.0	36.0	8512 6.900
7.000		8.0	79.0	34.0	36.0	8512 7.000
7.100		8.0	79.0	41.0	36.0	8512 7.100
7.140	9/32	8.0	79.0	41.0	36.0	8512 7.140
7.200		8.0	79.0	41.0	36.0	8512 7.200
7.300		8.0	79.0	41.0	36.0	8512 7.300
7.400		8.0	79.0	41.0	36.0	8512 7.400
7.500		8.0	79.0	41.0	36.0	8512 7.500
7.540	19/64	8.0	79.0	41.0	36.0	8512 7.540

Article no.

8512



d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.
7.550		8.0	79.0	41.0	36.0	8512 7.550
7.600		8.0	79.0	41.0	36.0	8512 7.600
7.650		8.0	79.0	41.0	36.0	8512 7.650
7.700		8.0	79.0	41.0	36.0	8512 7.700
7.800		8.0	79.0	41.0	36.0	8512 7.800
7.900		8.0	79.0	41.0	36.0	8512 7.900
7.940	5/16	8.0	79.0	41.0	36.0	8512 7.940
8.000		8.0	79.0	41.0	36.0	8512 8.000
8.100		10.0	89.0	47.0	40.0	8512 8.100
8.200		10.0	89.0	47.0	40.0	8512 8.200
8.300		10.0	89.0	47.0	40.0	8512 8.300
8.330	21/64	10.0	89.0	47.0	40.0	8512 8.330
8.400		10.0	89.0	47.0	40.0	8512 8.400
8.500		10.0	89.0	47.0	40.0	8512 8.500
8.600		10.0	89.0	47.0	40.0	8512 8.600
8.700		10.0	89.0	47.0	40.0	8512 8.700
8.730	11/32	10.0	89.0	47.0	40.0	8512 8.730
8.800		10.0	89.0	47.0	40.0	8512 8.800
8.900		10.0	89.0	47.0	40.0	8512 8.900
9.000		10.0	89.0	47.0	40.0	8512 9.000
9.100		10.0	89.0	47.0	40.0	8512 9.100
9.130	23/64	10.0	89.0	47.0	40.0	8512 9.130
9.200		10.0	89.0	47.0	40.0	8512 9.200
9.250		10.0	89.0	47.0	40.0	8512 9.250
9.300		10.0	89.0	47.0	40.0	8512 9.300
9.340		10.0	89.0	47.0	40.0	8512 9.340
9.400		10.0	89.0	47.0	40.0	8512 9.400
9.500		10.0	89.0	47.0	40.0	8512 9.500
9.520	3/8	10.0	89.0	47.0	40.0	8512 9.520
9.550		10.0	89.0	47.0	40.0	8512 9.550
9.600		10.0	89.0	47.0	40.0	8512 9.600
9.700		10.0	89.0	47.0	40.0	8512 9.700
9.800		10.0	89.0	47.0	40.0	8512 9.800
9.900		10.0	89.0	47.0	40.0	8512 9.900
9.920	25/64	10.0	89.0	47.0	40.0	8512 9.920
10.000		10.0	89.0	47.0	40.0	8512 10.000
10.100		12.0	102.0	55.0	45.0	8512 10.100
10.200		12.0	102.0	55.0	45.0	8512 10.200
10.300		12.0	102.0	55.0	45.0	8512 10.300
10.320	13/32	12.0	102.0	55.0	45.0	8512 10.320
10.400		12.0	102.0	55.0	45.0	8512 10.400
10.500		12.0	102.0	55.0	45.0	8512 10.500
10.600		12.0	102.0	55.0	45.0	8512 10.600
10.700		12.0	102.0	55.0	45.0	8512 10.700
10.720	27/64	12.0	102.0	55.0	45.0	8512 10.720
10.800		12.0	102.0	55.0	45.0	8512 10.800
10.900		12.0	102.0	55.0	45.0	8512 10.900
11.000		12.0	102.0	55.0	45.0	8512 11.000
11.100		12.0	102.0	55.0	45.0	8512 11.100
11.110	7/16	12.0	102.0	55.0	45.0	8512 11.110
11.200		12.0	102.0	55.0	45.0	8512 11.200
11.300		12.0	102.0	55.0	45.0	8512 11.300
11.400		12.0	102.0	55.0	45.0	8512 11.400
11.500		12.0	102.0	55.0	45.0	8512 11.500
11.510	29/64	12.0	102.0	55.0	45.0	8512 11.510
11.550		12.0	102.0	55.0	45.0	8512 11.550
11.600		12.0	102.0	55.0	45.0	8512 11.600
11.700		12.0	102.0	55.0	45.0	8512 11.700
11.800		12.0	102.0	55.0	45.0	8512 11.800
11.900		12.0	102.0	55.0	45.0	8512 11.900
11.910	15/32	12.0	102.0	55.0	45.0	8512 11.910
12.000		12.0	102.0	55.0	45.0	8512 12.000
12.100		14.0	107.0	60.0	45.0	8512 12.100
12.200		14.0	107.0	60.0	45.0	8512 12.200
12.300	31/64	14.0	107.0	60.0	45.0	8512 12.300
12.400		14.0	107.0	60.0	45.0	8512 12.400




Article no.						8512	Article no.						8512
d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.
12.500		14.0	107.0	60.0	45.0	8512 12.500	15.900		16.0	115.0	65.0	48.0	8512 15.900
12.600		14.0	107.0	60.0	45.0	8512 12.600	16.000		16.0	115.0	65.0	48.0	8512 16.000
12.700	1/2	14.0	107.0	60.0	45.0	8512 12.700	16.270	41/64	18.0	123.0	73.0	48.0	8512 16.270
12.800		14.0	107.0	60.0	45.0	8512 12.800	16.300		18.0	123.0	73.0	48.0	8512 16.300
12.900		14.0	107.0	60.0	45.0	8512 12.900	16.500		18.0	123.0	73.0	48.0	8512 16.500
13.000		14.0	107.0	60.0	45.0	8512 13.000	16.670	21/32	18.0	123.0	73.0	48.0	8512 16.670
13.100	33/64	14.0	107.0	60.0	45.0	8512 13.100	16.700		18.0	123.0	73.0	48.0	8512 16.700
13.200		14.0	107.0	60.0	45.0	8512 13.200	16.900		18.0	123.0	73.0	48.0	8512 16.900
13.300		14.0	107.0	60.0	45.0	8512 13.300	17.000		18.0	123.0	73.0	48.0	8512 17.000
13.400		14.0	107.0	60.0	45.0	8512 13.400	17.070	43/64	18.0	123.0	73.0	48.0	8512 17.070
13.490	17/32	14.0	107.0	60.0	45.0	8512 13.490	17.460	11/16	18.0	123.0	73.0	48.0	8512 17.460
13.500		14.0	107.0	60.0	45.0	8512 13.500	17.500		18.0	123.0	73.0	48.0	8512 17.500
13.600		14.0	107.0	60.0	45.0	8512 13.600	17.550		18.0	123.0	73.0	48.0	8512 17.550
13.700		14.0	107.0	60.0	45.0	8512 13.700	17.700		18.0	123.0	73.0	48.0	8512 17.700
13.800		14.0	107.0	60.0	45.0	8512 13.800	17.860	45/64	18.0	123.0	73.0	48.0	8512 17.860
13.890	35/64	14.0	107.0	60.0	45.0	8512 13.890	18.000		18.0	123.0	73.0	48.0	8512 18.000
13.900		14.0	107.0	60.0	45.0	8512 13.900	18.260	23/32	20.0	131.0	79.0	50.0	8512 18.260
14.000		14.0	107.0	60.0	45.0	8512 14.000	18.500		20.0	131.0	79.0	50.0	8512 18.500
14.100		16.0	115.0	65.0	48.0	8512 14.100	18.700		20.0	131.0	79.0	50.0	8512 18.700
14.200		16.0	115.0	65.0	48.0	8512 14.200	18.900		20.0	131.0	79.0	50.0	8512 18.900
14.290	9/16	16.0	115.0	65.0	48.0	8512 14.290	19.000		20.0	131.0	79.0	50.0	8512 19.000
14.300		16.0	115.0	65.0	48.0	8512 14.300	19.050	3/4	20.0	131.0	79.0	50.0	8512 19.050
14.400		16.0	115.0	65.0	48.0	8512 14.400	19.250		20.0	131.0	79.0	50.0	8512 19.250
14.500		16.0	115.0	65.0	48.0	8512 14.500	19.300		20.0	131.0	79.0	50.0	8512 19.300
14.600		16.0	115.0	65.0	48.0	8512 14.600	19.450	49/64	20.0	131.0	79.0	50.0	8512 19.450
14.680	37/64	16.0	115.0	65.0	48.0	8512 14.680	19.500		20.0	131.0	79.0	50.0	8512 19.500
14.700		16.0	115.0	65.0	48.0	8512 14.700	19.550		20.0	131.0	79.0	50.0	8512 19.550
14.800		16.0	115.0	65.0	48.0	8512 14.800	19.700		20.0	131.0	79.0	50.0	8512 19.700
14.900		16.0	115.0	65.0	48.0	8512 14.900	19.800		20.0	131.0	79.0	50.0	8512 19.800
15.000		16.0	115.0	65.0	48.0	8512 15.000	19.840	25/32	20.0	131.0	79.0	50.0	8512 19.840
15.080	19/32	16.0	115.0	65.0	48.0	8512 15.080	20.000		20.0	131.0	79.0	50.0	8512 20.000
15.100		16.0	115.0	65.0	48.0	8512 15.100							
15.200		16.0	115.0	65.0	48.0	8512 15.200							
15.300		16.0	115.0	65.0	48.0	8512 15.300							
15.400		16.0	115.0	65.0	48.0	8512 15.400							
15.480	39/64	16.0	115.0	65.0	48.0	8512 15.480							
15.500		16.0	115.0	65.0	48.0	8512 15.500							
15.550		16.0	115.0	65.0	48.0	8512 15.550							
15.600		16.0	115.0	65.0	48.0	8512 15.600							
15.700		16.0	115.0	65.0	48.0	8512 15.700							
15.800		16.0	115.0	65.0	48.0	8512 15.800							
15.870	5/8	16.0	115.0	65.0	48.0	8512 15.870							



Ratio drills with coolant ducts

Article no. **8513**

Web thinning $\geq \varnothing 3.000$ • maximum performance • optimised cutting edge geometry • main cutting edge is slightly concave • exceptional hole quality

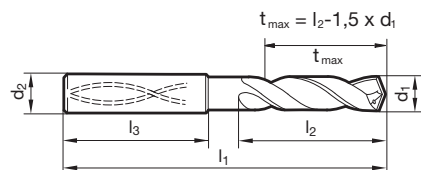

Article no.

8513

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.
3.000		6.0	66.0	28.0	36.0	8513 3.000
3.100		6.0	66.0	28.0	36.0	8513 3.100
3.170	1/8	6.0	66.0	28.0	36.0	8513 3.170
3.200		6.0	66.0	28.0	36.0	8513 3.200
3.250		6.0	66.0	28.0	36.0	8513 3.250
3.300		6.0	66.0	28.0	36.0	8513 3.300
3.400		6.0	66.0	28.0	36.0	8513 3.400
3.500		6.0	66.0	28.0	36.0	8513 3.500
3.570	9/64	6.0	66.0	28.0	36.0	8513 3.570
3.600		6.0	66.0	28.0	36.0	8513 3.600
3.700		6.0	66.0	28.0	36.0	8513 3.700
3.800		6.0	74.0	36.0	36.0	8513 3.800
3.900		6.0	74.0	36.0	36.0	8513 3.900
3.970	5/32	6.0	74.0	36.0	36.0	8513 3.970
4.000		6.0	74.0	36.0	36.0	8513 4.000
4.040		6.0	74.0	36.0	36.0	8513 4.040
4.100		6.0	74.0	36.0	36.0	8513 4.100
4.200		6.0	74.0	36.0	36.0	8513 4.200
4.300		6.0	74.0	36.0	36.0	8513 4.300
4.370	11/64	6.0	74.0	36.0	36.0	8513 4.370
4.400		6.0	74.0	36.0	36.0	8513 4.400
4.500		6.0	74.0	36.0	36.0	8513 4.500
4.600		6.0	74.0	36.0	36.0	8513 4.600
4.650		6.0	74.0	36.0	36.0	8513 4.650
4.700		6.0	74.0	36.0	36.0	8513 4.700
4.760	3/16	6.0	82.0	44.0	36.0	8513 4.760
4.800		6.0	82.0	44.0	36.0	8513 4.800
4.900		6.0	82.0	44.0	36.0	8513 4.900
5.000		6.0	82.0	44.0	36.0	8513 5.000
5.100		6.0	82.0	44.0	36.0	8513 5.100
5.110		6.0	82.0	44.0	36.0	8513 5.110
5.160	13/64	6.0	82.0	44.0	36.0	8513 5.160
5.200		6.0	82.0	44.0	36.0	8513 5.200
5.300		6.0	82.0	44.0	36.0	8513 5.300
5.400		6.0	82.0	44.0	36.0	8513 5.400
5.410		6.0	82.0	44.0	36.0	8513 5.410
5.500		6.0	82.0	44.0	36.0	8513 5.500
5.550		6.0	82.0	44.0	36.0	8513 5.550
5.560	7/32	6.0	82.0	44.0	36.0	8513 5.560
5.600		6.0	82.0	44.0	36.0	8513 5.600
5.700		6.0	82.0	44.0	36.0	8513 5.700
5.800		6.0	82.0	44.0	36.0	8513 5.800
5.900		6.0	82.0	44.0	36.0	8513 5.900
5.950	15/64	6.0	82.0	44.0	36.0	8513 5.950
6.000		6.0	82.0	44.0	36.0	8513 6.000
6.100		8.0	91.0	53.0	36.0	8513 6.100
6.200		8.0	91.0	53.0	36.0	8513 6.200
6.300		8.0	91.0	53.0	36.0	8513 6.300
6.350	1/4	8.0	91.0	53.0	36.0	8513 6.350
6.400		8.0	91.0	53.0	36.0	8513 6.400
6.500		8.0	91.0	53.0	36.0	8513 6.500
6.530		8.0	91.0	53.0	36.0	8513 6.530
6.550		8.0	91.0	53.0	36.0	8513 6.550
6.600		8.0	91.0	53.0	36.0	8513 6.600
6.700		8.0	91.0	53.0	36.0	8513 6.700
6.750	17/64	8.0	91.0	53.0	36.0	8513 6.750
6.800		8.0	91.0	53.0	36.0	8513 6.800
6.900		8.0	91.0	53.0	36.0	8513 6.900
7.000		8.0	91.0	53.0	36.0	8513 7.000
7.100		8.0	91.0	53.0	36.0	8513 7.100
7.140	9/32	8.0	91.0	53.0	36.0	8513 7.140
7.200		8.0	91.0	53.0	36.0	8513 7.200
7.300		8.0	91.0	53.0	36.0	8513 7.300
7.400		8.0	91.0	53.0	36.0	8513 7.400
7.500		8.0	91.0	53.0	36.0	8513 7.500
7.540	19/64	8.0	91.0	53.0	36.0	8513 7.540

Article no.

8513



d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.
7.550		8.0	91.0	53.0	36.0	8513 7.550
7.600		8.0	91.0	53.0	36.0	8513 7.600
7.650		8.0	91.0	53.0	36.0	8513 7.650
7.700		8.0	91.0	53.0	36.0	8513 7.700
7.800		8.0	91.0	53.0	36.0	8513 7.800
7.900		8.0	91.0	53.0	36.0	8513 7.900
7.940	5/16	8.0	91.0	53.0	36.0	8513 7.940
8.000		8.0	91.0	53.0	36.0	8513 8.000
8.100		10.0	103.0	61.0	40.0	8513 8.100
8.200		10.0	103.0	61.0	40.0	8513 8.200
8.300		10.0	103.0	61.0	40.0	8513 8.300
8.330	21/64	10.0	103.0	61.0	40.0	8513 8.330
8.400		10.0	103.0	61.0	40.0	8513 8.400
8.500		10.0	103.0	61.0	40.0	8513 8.500
8.600		10.0	103.0	61.0	40.0	8513 8.600
8.700	11/32	10.0	103.0	61.0	40.0	8513 8.700
8.730		10.0	103.0	61.0	40.0	8513 8.730
8.800		10.0	103.0	61.0	40.0	8513 8.800
8.900		10.0	103.0	61.0	40.0	8513 8.900
9.000		10.0	103.0	61.0	40.0	8513 9.000
9.100		10.0	103.0	61.0	40.0	8513 9.100
9.130	23/64	10.0	103.0	61.0	40.0	8513 9.130
9.200		10.0	103.0	61.0	40.0	8513 9.200
9.250		10.0	103.0	61.0	40.0	8513 9.250
9.300		10.0	103.0	61.0	40.0	8513 9.300
9.340		10.0	103.0	61.0	40.0	8513 9.340
9.400		10.0	103.0	61.0	40.0	8513 9.400
9.500		10.0	103.0	61.0	40.0	8513 9.500
9.520	3/8	10.0	103.0	61.0	40.0	8513 9.520
9.550		10.0	103.0	61.0	40.0	8513 9.550
9.600		10.0	103.0	61.0	40.0	8513 9.600
9.700		10.0	103.0	61.0	40.0	8513 9.700
9.800		10.0	103.0	61.0	40.0	8513 9.800
9.900		10.0	103.0	61.0	40.0	8513 9.900
9.920	25/64	10.0	103.0	61.0	40.0	8513 9.920
10.000		10.0	103.0	61.0	40.0	8513 10.000
10.100		12.0	118.0	71.0	45.0	8513 10.100
10.200		12.0	118.0	71.0	45.0	8513 10.200
10.300		12.0	118.0	71.0	45.0	8513 10.300
10.320	13/32	12.0	118.0	71.0	45.0	8513 10.320
10.400		12.0	118.0	71.0	45.0	8513 10.400
10.500		12.0	118.0	71.0	45.0	8513 10.500
10.600		12.0	118.0	71.0	45.0	8513 10.600
10.700		12.0	118.0	71.0	45.0	8513 10.700
10.720	27/64	12.0	118.0	71.0	45.0	8513 10.720
10.800		12.0	118.0	71.0	45.0	8513 10.800
10.900		12.0	118.0	71.0	45.0	8513 10.900
11.000		12.0	118.0	71.0	45.0	8513 11.000
11.100		12.0	118.0	71.0	45.0	8513 11.100
11.110	7/16	12.0	118.0	71.0	45.0	8513 11.110
11.200		12.0	118.0	71.0	45.0	8513 11.200
11.300		12.0	118.0	71.0	45.0	8513 11.300
11.400		12.0	118.0	71.0	45.0	8513 11.400
11.500		12.0	118.0	71.0	45.0	8513 11.500
11.510	29/64	12.0	118.0	71.0	45.0	8513 11.510
11.550		12.0	118.0	71.0	45.0	8513 11.550
11.600		12.0	118.0	71.0	45.0	8513 11.600
11.700		12.0	118.0	71.0	45.0	8513 11.700
11.800		12.0	118.0	71.0	45.0	8513 11.800
11.900		12.0	118.0	71.0	45.0	8513 11.900
11.910	15/32	12.0	118.0	71.0	45.0	8513 11.910
12.000		12.0	118.0	71.0	45.0	8513 12.000
12.100		14.0	124.0	77.0	45.0	8513 12.100
12.200		14.0	124.0	77.0	45.0	8513 12.200
12.300	31/64	14.0	124.0	77.0	45.0	8513 12.300
12.400		14.0	124.0	77.0	45.0	8513 12.400




Article no.						8513	Article no.						8513
d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.
12.500		14.0	124.0	77.0	45.0	8513 12.500	15.900		16.0	133.0	83.0	48.0	8513 15.900
12.600		14.0	124.0	77.0	45.0	8513 12.600	16.000		16.0	133.0	83.0	48.0	8513 16.000
12.700	1/2	14.0	124.0	77.0	45.0	8513 12.700	16.270	41/64	18.0	143.0	93.0	48.0	8513 16.270
12.800		14.0	124.0	77.0	45.0	8513 12.800	16.300		18.0	143.0	93.0	48.0	8513 16.300
12.900		14.0	124.0	77.0	45.0	8513 12.900	16.500		18.0	143.0	93.0	48.0	8513 16.500
13.000		14.0	124.0	77.0	45.0	8513 13.000	16.670	21/32	18.0	143.0	93.0	48.0	8513 16.670
13.100	33/64	14.0	124.0	77.0	45.0	8513 13.100	16.700		18.0	143.0	93.0	48.0	8513 16.700
13.200		14.0	124.0	77.0	45.0	8513 13.200	16.900		18.0	143.0	93.0	48.0	8513 16.900
13.300		14.0	124.0	77.0	45.0	8513 13.300	17.000		18.0	143.0	93.0	48.0	8513 17.000
13.400		14.0	124.0	77.0	45.0	8513 13.400	17.070	43/64	18.0	143.0	93.0	48.0	8513 17.070
13.490	17/32	14.0	124.0	77.0	45.0	8513 13.490	17.460	11/16	18.0	143.0	93.0	48.0	8513 17.460
13.500		14.0	124.0	77.0	45.0	8513 13.500	17.500		18.0	143.0	93.0	48.0	8513 17.500
13.600		14.0	124.0	77.0	45.0	8513 13.600	17.550		18.0	143.0	93.0	48.0	8513 17.550
13.700		14.0	124.0	77.0	45.0	8513 13.700	17.700		18.0	143.0	93.0	48.0	8513 17.700
13.800		14.0	124.0	77.0	45.0	8513 13.800	17.860	45/64	18.0	143.0	93.0	48.0	8513 17.860
13.890	35/64	14.0	124.0	77.0	45.0	8513 13.890	18.000		18.0	143.0	93.0	48.0	8513 18.000
13.900		14.0	124.0	77.0	45.0	8513 13.900	18.260	23/32	20.0	153.0	101.0	50.0	8513 18.260
14.000		14.0	124.0	77.0	45.0	8513 14.000	18.500		20.0	153.0	101.0	50.0	8513 18.500
14.100		16.0	133.0	83.0	48.0	8513 14.100	18.700		20.0	153.0	101.0	50.0	8513 18.700
14.200		16.0	133.0	83.0	48.0	8513 14.200	18.900		20.0	153.0	101.0	50.0	8513 18.900
14.290	9/16	16.0	133.0	83.0	48.0	8513 14.290	19.000		20.0	153.0	101.0	50.0	8513 19.000
14.300		16.0	133.0	83.0	48.0	8513 14.300	19.050	3/4	20.0	153.0	101.0	50.0	8513 19.050
14.400		16.0	133.0	83.0	48.0	8513 14.400	19.250		20.0	153.0	101.0	50.0	8513 19.250
14.500		16.0	133.0	83.0	48.0	8513 14.500	19.300		20.0	153.0	101.0	50.0	8513 19.300
14.600		16.0	133.0	83.0	48.0	8513 14.600	19.450	49/64	20.0	153.0	101.0	50.0	8513 19.450
14.680	37/64	16.0	133.0	83.0	48.0	8513 14.680	19.500		20.0	153.0	101.0	50.0	8513 19.500
14.700		16.0	133.0	83.0	48.0	8513 14.700	19.550		20.0	153.0	101.0	50.0	8513 19.550
14.800		16.0	133.0	83.0	48.0	8513 14.800	19.700		20.0	153.0	101.0	50.0	8513 19.700
14.900		16.0	133.0	83.0	48.0	8513 14.900	19.800		20.0	153.0	101.0	50.0	8513 19.800
15.000		16.0	133.0	83.0	48.0	8513 15.000	19.840	25/32	20.0	153.0	101.0	50.0	8513 19.840
15.080	19/32	16.0	133.0	83.0	48.0	8513 15.080	20.000		20.0	153.0	101.0	50.0	8513 20.000
15.100		16.0	133.0	83.0	48.0	8513 15.100							
15.200		16.0	133.0	83.0	48.0	8513 15.200							
15.300		16.0	133.0	83.0	48.0	8513 15.300							
15.400		16.0	133.0	83.0	48.0	8513 15.400							
15.480	39/64	16.0	133.0	83.0	48.0	8513 15.480							
15.500		16.0	133.0	83.0	48.0	8513 15.500							
15.550		16.0	133.0	83.0	48.0	8513 15.550							
15.600		16.0	133.0	83.0	48.0	8513 15.600							
15.700		16.0	133.0	83.0	48.0	8513 15.700							
15.800		16.0	133.0	83.0	48.0	8513 15.800							
15.870	5/8	16.0	133.0	83.0	48.0	8513 15.870							



Ratio drills with coolant ducts

Article no. **8514**

Web thinning $\geq \varnothing 3.000$ • maximum performance • optimised cutting edge geometry • main cutting edge is slightly concave • exceptional hole quality

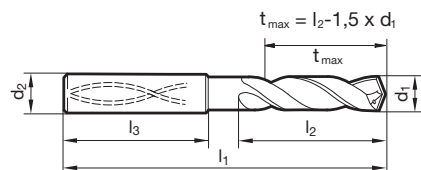

Article no.

8514

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.
3.000		6.0	70.0	30.0	36.0	8514 3.000
3.100		6.0	70.0	30.0	36.0	8514 3.100
3.170	1/8	6.0	70.0	30.0	36.0	8514 3.170
3.200		6.0	70.0	30.0	36.0	8514 3.200
3.250		6.0	70.0	30.0	36.0	8514 3.250
3.300		6.0	70.0	30.0	36.0	8514 3.300
3.400		6.0	75.0	35.5	36.0	8514 3.400
3.500		6.0	75.0	35.5	36.0	8514 3.500
3.570	9/64	6.0	75.0	35.5	36.0	8514 3.570
3.600		6.0	75.0	35.5	36.0	8514 3.600
3.700		6.0	75.0	35.5	36.0	8514 3.700
3.800		6.0	75.0	37.5	36.0	8514 3.800
3.900		6.0	75.0	37.5	36.0	8514 3.900
3.970	5/32	6.0	75.0	37.5	36.0	8514 3.970
4.000		6.0	75.0	37.5	36.0	8514 4.000
4.040		6.0	75.0	37.5	36.0	8514 4.040
4.100		6.0	75.0	37.5	36.0	8514 4.100
4.200		6.0	75.0	37.5	36.0	8514 4.200
4.300		6.0	85.0	45.0	36.0	8514 4.300
4.370	11/64	6.0	85.0	45.0	36.0	8514 4.370
4.400		6.0	85.0	45.0	36.0	8514 4.400
4.500		6.0	85.0	45.0	36.0	8514 4.500
4.600		6.0	85.0	45.0	36.0	8514 4.600
4.650		6.0	85.0	45.0	36.0	8514 4.650
4.700		6.0	85.0	45.0	36.0	8514 4.700
4.760	3/16	6.0	90.0	50.0	36.0	8514 4.760
4.800		6.0	90.0	50.0	36.0	8514 4.800
4.900		6.0	90.0	50.0	36.0	8514 4.900
5.000		6.0	90.0	50.0	36.0	8514 5.000
5.100		6.0	90.0	50.0	36.0	8514 5.100
5.110		6.0	90.0	50.0	36.0	8514 5.110
5.160	13/64	6.0	90.0	50.0	36.0	8514 5.160
5.200		6.0	90.0	50.0	36.0	8514 5.200
5.300		6.0	90.0	50.0	36.0	8514 5.300
5.400		6.0	97.0	57.0	36.0	8514 5.400
5.410		6.0	97.0	57.0	36.0	8514 5.410
5.500		6.0	97.0	57.0	36.0	8514 5.500
5.550		6.0	97.0	57.0	36.0	8514 5.550
5.560	7/32	6.0	97.0	57.0	36.0	8514 5.560
5.600		6.0	97.0	57.0	36.0	8514 5.600
5.700		6.0	97.0	57.0	36.0	8514 5.700
5.800		6.0	97.0	57.0	36.0	8514 5.800
5.900		6.0	97.0	57.0	36.0	8514 5.900
5.950	15/64	6.0	97.0	57.0	36.0	8514 5.950
6.000		6.0	97.0	57.0	36.0	8514 6.000
6.100		8.0	106.0	66.0	36.0	8514 6.100
6.200		8.0	106.0	66.0	36.0	8514 6.200
6.300		8.0	106.0	66.0	36.0	8514 6.300
6.350	1/4	8.0	106.0	66.0	36.0	8514 6.350
6.400		8.0	106.0	66.0	36.0	8514 6.400
6.500		8.0	106.0	66.0	36.0	8514 6.500
6.530		8.0	106.0	66.0	36.0	8514 6.530
6.550		8.0	106.0	66.0	36.0	8514 6.550
6.600		8.0	106.0	66.0	36.0	8514 6.600
6.700		8.0	106.0	66.0	36.0	8514 6.700
6.750	17/64	8.0	106.0	66.0	36.0	8514 6.750
6.800		8.0	106.0	66.0	36.0	8514 6.800
6.900		8.0	116.0	76.0	36.0	8514 6.900
7.000		8.0	116.0	76.0	36.0	8514 7.000
7.100		8.0	116.0	76.0	36.0	8514 7.100
7.140	9/32	8.0	116.0	76.0	36.0	8514 7.140
7.200		8.0	116.0	76.0	36.0	8514 7.200
7.300		8.0	116.0	76.0	36.0	8514 7.300
7.400		8.0	116.0	76.0	36.0	8514 7.400
7.500		8.0	116.0	76.0	36.0	8514 7.500
7.540	19/64	8.0	116.0	76.0	36.0	8514 7.540

Article no.

8514

d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.
7.550		8.0	116.0	76.0	36.0	8514 7.550
7.600		8.0	116.0	76.0	36.0	8514 7.600
7.650		8.0	116.0	76.0	36.0	8514 7.650
7.700		8.0	116.0	76.0	36.0	8514 7.700
7.800		8.0	116.0	76.0	36.0	8514 7.800
7.900		8.0	116.0	76.0	36.0	8514 7.900
7.940	5/16	8.0	116.0	76.0	36.0	8514 7.940
8.000		8.0	116.0	76.0	36.0	8514 8.000
8.100		10.0	131.0	87.0	40.0	8514 8.100
8.200		10.0	131.0	87.0	40.0	8514 8.200
8.300		10.0	131.0	87.0	40.0	8514 8.300
8.330	21/64	10.0	131.0	87.0	40.0	8514 8.330
8.400		10.0	131.0	87.0	40.0	8514 8.400
8.500		10.0	131.0	87.0	40.0	8514 8.500
8.600		10.0	131.0	87.0	40.0	8514 8.600
8.700	11/32	10.0	131.0	87.0	40.0	8514 8.700
8.730		10.0	131.0	87.0	40.0	8514 8.730
8.800		10.0	131.0	87.0	40.0	8514 8.800
8.900		10.0	131.0	87.0	40.0	8514 8.900
9.000		10.0	131.0	87.0	40.0	8514 9.000
9.100		10.0	139.0	95.0	40.0	8514 9.100
9.130	23/64	10.0	139.0	95.0	40.0	8514 9.130
9.200		10.0	139.0	95.0	40.0	8514 9.200
9.250		10.0	139.0	95.0	40.0	8514 9.250
9.300		10.0	139.0	95.0	40.0	8514 9.300
9.340		10.0	139.0	95.0	40.0	8514 9.340
9.400		10.0	139.0	95.0	40.0	8514 9.400
9.500		10.0	139.0	95.0	40.0	8514 9.500
9.520	3/8	10.0	139.0	95.0	40.0	8514 9.520
9.550		10.0	139.0	95.0	40.0	8514 9.550
9.600		10.0	139.0	95.0	40.0	8514 9.600
9.700		10.0	139.0	95.0	40.0	8514 9.700
9.800		10.0	139.0	95.0	40.0	8514 9.800
9.900		10.0	139.0	95.0	40.0	8514 9.900
9.920	25/64	10.0	139.0	95.0	40.0	8514 9.920
10.000		10.0	139.0	95.0	40.0	8514 10.000
10.100		12.0	155.0	106.0	45.0	8514 10.100
10.200		12.0	155.0	106.0	45.0	8514 10.200
10.300		12.0	155.0	106.0	45.0	8514 10.300
10.320	13/32	12.0	155.0	106.0	45.0	8514 10.320
10.400		12.0	155.0	106.0	45.0	8514 10.400
10.500		12.0	155.0	106.0	45.0	8514 10.500
10.600		12.0	155.0	106.0	45.0	8514 10.600
10.700		12.0	155.0	106.0	45.0	8514 10.700
10.720	27/64	12.0	155.0	106.0	45.0	8514 10.720
10.800		12.0	155.0	106.0	45.0	8514 10.800
10.900		12.0	155.0	106.0	45.0	8514 10.900
11.000		12.0	155.0	106.0	45.0	8514 11.000
11.100		12.0	163.0	114.0	45.0	8514 11.100
11.110	7/16	12.0	163.0	114.0	45.0	8514 11.110
11.200		12.0	163.0	114.0	45.0	8514 11.200
11.300		12.0	163.0	114.0	45.0	8514 11.300
11.400		12.0	163.0	114.0	45.0	8514 11.400
11.500		12.0	163.0	114.0	45.0	8514 11.500
11.510	29/64	12.0	163.0	114.0	45.0	8514 11.510
11.550		12.0	163.0	114.0	45.0	8514 11.550
11.600		12.0	163.0	114.0	45.0	8514 11.600
11.700		12.0	163.0	114.0	45.0	8514 11.700
11.800		12.0	163.0	114.0	45.0	8514 11.800
11.900		12.0	163.0	114.0	45.0	8514 11.900
11.910	15/32	12.0	163.0	114.0	45.0	8514 11.910
12.000		12.0	163.0	114.0	45.0	8514 12.000
12.100		14.0	182.0	133.0	45.0	8514 12.100
12.200		14.0	182.0	133.0	45.0	8514 12.200
12.300	31/64	14.0	182.0	133.0	45.0	8514 12.300
12.400		14.0	182.0	133.0	45.0	8514 12.400



Article no.						8514	Article no.						8514
d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.	d1 mm	inch	d2 h6 mm	l1 mm	l2 mm	l3 mm	Order no.
12.500		14.0	182.0	133.0	45.0	8514 12.500	15.900		16.0	204.0	152.0	48.0	8514 15.900
12.600		14.0	182.0	133.0	45.0	8514 12.600	16.000		16.0	204.0	152.0	48.0	8514 16.000
12.700	1/2	14.0	182.0	133.0	45.0	8514 12.700	16.270	41/64	18.0	223.0	171.0	48.0	8514 16.270
12.800		14.0	182.0	133.0	45.0	8514 12.800	16.300		18.0	223.0	171.0	48.0	8514 16.300
12.900		14.0	182.0	133.0	45.0	8514 12.900	16.500		18.0	223.0	171.0	48.0	8514 16.500
13.000		14.0	182.0	133.0	45.0	8514 13.000	16.670	21/32	18.0	223.0	171.0	48.0	8514 16.670
13.100	33/64	14.0	182.0	133.0	45.0	8514 13.100	16.700		18.0	223.0	171.0	48.0	8514 16.700
13.200		14.0	182.0	133.0	45.0	8514 13.200	16.900		18.0	223.0	171.0	48.0	8514 16.900
13.300		14.0	182.0	133.0	45.0	8514 13.300	17.000		18.0	223.0	171.0	48.0	8514 17.000
13.400		14.0	182.0	133.0	45.0	8514 13.400	17.070	43/64	18.0	223.0	171.0	48.0	8514 17.070
13.490	17/32	14.0	182.0	133.0	45.0	8514 13.490	17.460	11/16	18.0	223.0	171.0	48.0	8514 17.460
13.500		14.0	182.0	133.0	45.0	8514 13.500	17.500		18.0	223.0	171.0	48.0	8514 17.500
13.600		14.0	182.0	133.0	45.0	8514 13.600	17.550		18.0	223.0	171.0	48.0	8514 17.550
13.700		14.0	182.0	133.0	45.0	8514 13.700	17.700		18.0	223.0	171.0	48.0	8514 17.700
13.800		14.0	182.0	133.0	45.0	8514 13.800	17.860	45/64	18.0	223.0	171.0	48.0	8514 17.860
13.890	35/64	14.0	182.0	133.0	45.0	8514 13.890	18.000		18.0	223.0	171.0	48.0	8514 18.000
13.900		14.0	182.0	133.0	45.0	8514 13.900	18.260	23/32	20.0	244.0	190.0	50.0	8514 18.260
14.000		14.0	182.0	133.0	45.0	8514 14.000	18.500		20.0	244.0	190.0	50.0	8514 18.500
14.100		16.0	204.0	152.0	48.0	8514 14.100	18.700		20.0	244.0	190.0	50.0	8514 18.700
14.200		16.0	204.0	152.0	48.0	8514 14.200	18.900		20.0	244.0	190.0	50.0	8514 18.900
14.290	9/16	16.0	204.0	152.0	48.0	8514 14.290	19.000		20.0	244.0	190.0	50.0	8514 19.000
14.300		16.0	204.0	152.0	48.0	8514 14.300	19.050	3/4	20.0	244.0	190.0	50.0	8514 19.050
14.400		16.0	204.0	152.0	48.0	8514 14.400	19.250		20.0	244.0	190.0	50.0	8514 19.250
14.500		16.0	204.0	152.0	48.0	8514 14.500	19.300		20.0	244.0	190.0	50.0	8514 19.300
14.600		16.0	204.0	152.0	48.0	8514 14.600	19.450	49/64	20.0	244.0	190.0	50.0	8514 19.450
14.680	37/64	16.0	204.0	152.0	48.0	8514 14.680	19.500		20.0	244.0	190.0	50.0	8514 19.500
14.700		16.0	204.0	152.0	48.0	8514 14.700	19.550		20.0	244.0	190.0	50.0	8514 19.550
14.800		16.0	204.0	152.0	48.0	8514 14.800	19.700		20.0	244.0	190.0	50.0	8514 19.700
14.900		16.0	204.0	152.0	48.0	8514 14.900	19.800		20.0	244.0	190.0	50.0	8514 19.800
15.000		16.0	204.0	152.0	48.0	8514 15.000	19.840	25/32	20.0	244.0	190.0	50.0	8514 19.840
15.080	19/32	16.0	204.0	152.0	48.0	8514 15.080	20.000		20.0	244.0	190.0	50.0	8514 20.000
15.100		16.0	204.0	152.0	48.0	8514 15.100							
15.200		16.0	204.0	152.0	48.0	8514 15.200							
15.300		16.0	204.0	152.0	48.0	8514 15.300							
15.400		16.0	204.0	152.0	48.0	8514 15.400							
15.480	39/64	16.0	204.0	152.0	48.0	8514 15.480							
15.500		16.0	204.0	152.0	48.0	8514 15.500							
15.550		16.0	204.0	152.0	48.0	8514 15.550							
15.600		16.0	204.0	152.0	48.0	8514 15.600							
15.700		16.0	204.0	152.0	48.0	8514 15.700							
15.800		16.0	204.0	152.0	48.0	8514 15.800							
15.870	5/8	16.0	204.0	152.0	48.0	8514 15.870							



Through-thread in the
housing
for a turbocharger

Industry:
Automotive industry

Material:
1.4826 / X15CrNiSi20-12

Target:
Reduce tool costs through
longer tool lives

The challenge

An important component in a turbocharger, this housing is responsible for transporting hot exhaust gases. High-temperature components like this are often made from this special stainless steel, which is resistant to temperatures up to 1000°C and offers extra tensile strength.

However, during machining, the material tends to form hard carbides on tool surfaces. Especially on the tap's cutting edges, these lead to increased wear and micro-chipping, which negatively affects the cutting performance and tool life.

Tap Pionex

HIGH PERFORMANCE FOR YOUR THREADS

Tool solution

The Pionex is our high-performance tap for blind hole machining in stainless steels. The tool is characterised by an increased helical pitch and its optimised flute geometry. Both ensure better chip removal and increase the tool life.

At the same time, an advanced TiAlN coating system reduces friction during thread tapping. In addition to stainless steels, Pionex is also ideal for use in stainless steels as well as low and high alloy steels.

TOOL PERFORMANCE REPORT

	Competitors' tool	Tap Pionex
Thread dimension	M6	M6
Cutting speed (v_c)	2.5 m/min	2.5 m/min
Speed (n)	133 1/rev/min	133 1/rev/min
Feed rate (v_f)	133 mm/min	133 mm/min
Thread depth (a_p)	16 mm	16 mm
Tool life (number of threads)	50	70
Machining time per hole	16 sec.	16 sec.

40 % longer tool life under otherwise identical conditions



Pionex





Taps for ISO metric threads

Article no. **393**

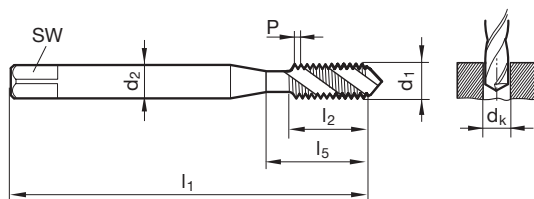

Standard

DIN 371/DIN 376

Article no.



393

d1	P mm	d2 mm	SW mm	dk mm	l1 mm	l2 mm	l5 mm		Order no.
M2	0.400	2.80	2.10	1.60	45.00	4.50	13.50	DIN 371	393 2.000
M2,5	0.450	2.80	2.10	2.05	50.00	5.00	14.50	DIN 371	393 2.500
M3	0.500	3.50	2.70	2.50	56.00	6.00	18.00	DIN 371	393 3.000
M3,5	0.600	4.00	3.00	2.90	56.00	7.00	20.00	DIN 371	393 3.500
M4	0.700	4.50	3.40	3.30	63.00	7.50	21.00	DIN 371	393 4.000
M4,5	0.750	6.00	4.90	3.70	70.00	8.50	25.00	DIN 371	393 4.500
M5	0.800	6.00	4.90	4.20	70.00	8.50	25.00	DIN 371	393 5.000
M6	1.000	6.00	4.90	5.00	80.00	11.00	30.00	DIN 371	393 6.000
M7	1.000	7.00	5.50	6.00	80.00	11.00	30.00	DIN 371	393 7.000
M8	1.250	8.00	6.20	6.80	90.00	14.00	35.00	DIN 371	393 8.000
M9	1.250	9.00	7.00	7.80	90.00	14.00	35.00	DIN 371	393 9.000
M10	1.500	10.00	8.00	8.50	100.00	16.00	39.00	DIN 371	393 10.000
M11	1.500	8.00	6.20	9.50	100.00	16.00	42.00	DIN 376	393 11.000
M12	1.750	9.00	7.00	10.20	110.00	18.50	49.00	DIN 376	393 12.000
M14	2.000	11.00	9.00	12.00	110.00	20.00	53.00	DIN 376	393 14.000
M16	2.000	12.00	9.00	14.00	110.00	20.00	54.00	DIN 376	393 16.000
M18	2.500	14.00	11.00	15.50	125.00	25.00	62.00	DIN 376	393 18.000
M20	2.500	16.00	12.00	17.50	140.00	25.00	62.00	DIN 376	393 20.000
M22	2.500	18.00	14.50	19.50	140.00	27.00	62.00	DIN 376	393 22.000
M24	3.000	18.00	14.50	21.00	160.00	30.00	73.00	DIN 376	393 24.000
M27	3.000	20.00	16.00	24.00	160.00	30.00	73.00	DIN 376	393 27.000
M30	3.500	22.00	18.00	26.50	180.00	35.00	85.00	DIN 376	393 30.000
M33	3.500	25.00	20.00	29.50	180.00	40.00	91.00	DIN 376	393 33.000
M36	4.000	28.00	22.00	32.00	200.00	40.00	102.00	DIN 376	393 36.000
M39	4.000	32.00	24.00	35.00	200.00	50.00	107.00	DIN 376	393 39.000
M42	4.500	32.00	24.00	37.50	200.00	45.00	112.00	DIN 376	393 42.000



Taps for ISO metric threads

Article no. 4218

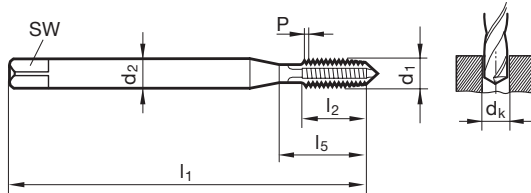

Standard

DIN 371/DIN 376

Article no.



4218

d1	P mm	d2 mm	SW mm	dk mm	l1 mm	l2 mm	l5 mm		Order no.
M2	0.400	2.80	2.10	1.60	45.00	8.00	13.50	DIN 371	4218 2.000
M2,5	0.450	2.80	2.10	2.05	50.00	9.00	14.50	DIN 371	4218 2.500
M3	0.500	3.50	2.70	2.50	56.00	10.00	18.00	DIN 371	4218 3.000
M4	0.700	4.50	3.40	3.30	63.00	12.00	21.00	DIN 371	4218 4.000
M4,5	0.750	6.00	4.90	3.70	70.00	14.00	25.00	DIN 371	4218 4.500
M5	0.800	6.00	4.90	4.20	70.00	14.00	25.00	DIN 371	4218 5.000
M6	1.000	6.00	4.90	5.00	80.00	16.00	30.00	DIN 371	4218 6.000
M7	1.000	7.00	5.50	6.00	80.00	16.00	30.00	DIN 371	4218 7.000
M8	1.250	8.00	6.20	6.80	90.00	17.00	35.00	DIN 371	4218 8.000
M9	1.250	9.00	7.00	7.80	90.00	17.00	35.00	DIN 371	4218 9.000
M10	1.500	10.00	8.00	8.50	100.00	20.00	39.00	DIN 371	4218 10.000
M11	1.500	8.00	6.20	9.50	100.00	20.00	42.00	DIN 376	4218 11.000
M12	1.750	9.00	7.00	10.20	110.00	24.00	49.00	DIN 376	4218 12.000
M14	2.000	11.00	9.00	12.00	110.00	26.00	53.00	DIN 376	4218 14.000
M16	2.000	12.00	9.00	14.00	110.00	26.00	54.00	DIN 376	4218 16.000
M18	2.500	14.00	11.00	15.50	125.00	30.00	62.00	DIN 376	4218 18.000
M20	2.500	16.00	12.00	17.50	140.00	32.00	62.00	DIN 376	4218 20.000
M22	2.500	18.00	14.50	19.50	140.00	32.00	62.00	DIN 376	4218 22.000
M24	3.000	18.00	14.50	21.00	160.00	36.00	73.00	DIN 376	4218 24.000
M27	3.000	20.00	16.00	24.00	160.00	36.00	73.00	DIN 376	4218 27.000
M30	3.500	22.00	18.00	26.50	180.00	40.00	85.00	DIN 376	4218 30.000
M33	3.500	25.00	20.00	29.50	180.00	40.00	91.00	DIN 376	4218 33.000
M36	4.000	28.00	22.00	32.00	200.00	50.00	102.00	DIN 376	4218 36.000
M39	4.000	32.00	24.00	35.00	200.00	50.00	107.00	DIN 376	4218 39.000
M42	4.500	32.00	24.00	37.50	200.00	56.00	112.00	DIN 376	4218 42.000



Taps for ISO metric fine threads

Article no. **394**

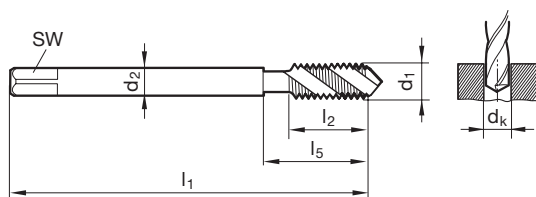

Standard

DIN 374

Article no.



394

d1	d2 mm	SW mm	dk mm	l1 mm	l2 mm	l5 mm	Order no.
M3 x 0,35	2.20	1.80	2.65	56.00	4.00	18.00	394 3.002
M4 x 0,35	2.80	2.10	3.65	63.00	5.00	21.00	394 4.002
M4 x 0,5	2.80	2.10	3.50	63.00	5.00	21.00	394 4.003
M5 x 0,5	3.50	2.70	4.50	70.00	5.00	25.00	394 5.003
M6 x 0,5	4.50	3.40	5.50	80.00	5.00	30.00	394 6.003
M6 x 0,75	4.50	3.40	5.20	80.00	8.00	30.00	394 6.004
M8 x 0,75	6.00	4.90	7.20	80.00	8.00	30.00	394 8.004
M8 x 1	6.00	4.90	7.00	90.00	11.00	35.00	394 8.005
M9 x 1	7.00	5.50	8.00	90.00	11.00	35.00	394 9.005
M10 x 0,75	7.00	5.50	9.20	90.00	11.00	35.00	394 10.004
M10 x 1	7.00	5.50	9.00	90.00	11.00	35.00	394 10.005
M10 x 1,25	7.00	5.50	8.80	100.00	14.00	39.00	394 10.006
M11 x 1	8.00	6.20	10.00	90.00	11.00	33.00	394 11.005
M12 x 1	9.00	7.00	11.00	100.00	11.00	40.00	394 12.005
M12 x 1,25	9.00	7.00	10.80	100.00	15.00	40.00	394 12.006
M12 x 1,5	9.00	7.00	10.50	100.00	15.00	40.00	394 12.007
M14 x 1	11.00	9.00	13.00	100.00	11.00	40.00	394 14.005
M14 x 1,25	11.00	9.00	12.80	100.00	15.00	40.00	394 14.006
M14 x 1,5	11.00	9.00	12.50	100.00	15.00	40.00	394 14.007
M16 x 1	12.00	9.00	15.00	100.00	11.00	44.00	394 16.005
M16 x 1,5	12.00	9.00	14.50	100.00	15.00	44.00	394 16.007
M18 x 1	14.00	11.00	17.00	110.00	12.00	44.00	394 18.005
M18 x 1,5	14.00	11.00	16.50	110.00	16.00	44.00	394 18.007
M18 x 2	14.00	11.00	16.00	125.00	20.00	58.00	394 18.008
M20 x 1	16.00	12.00	19.00	125.00	12.00	44.00	394 20.005
M20 x 1,5	16.00	12.00	18.50	125.00	16.00	44.00	394 20.007
M20 x 2	16.00	12.00	18.00	140.00	20.00	60.00	394 20.008
M22 x 1	18.00	14.50	21.00	125.00	12.00	44.00	394 22.005
M22 x 1,5	18.00	14.50	20.50	125.00	16.00	44.00	394 22.007
M22 x 2	18.00	14.50	20.00	140.00	22.00	62.00	394 22.008
M24 x 1	18.00	14.50	23.00	140.00	15.00	48.00	394 24.005
M24 x 1,5	18.00	14.50	22.50	140.00	16.00	48.00	394 24.007
M24 x 2	18.00	14.50	22.00	140.00	22.00	48.00	394 24.008



Taps for ISO metric fine threads

Article no. 4219

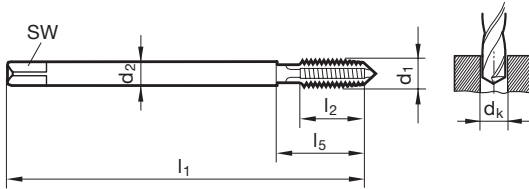

Standard

DIN 374

Article no.

4219

d1	d2 mm	SW mm	dk mm	l1 mm	l2 mm	l5 mm	Order no.
M3 x 0,35	2.20	1.80	2.65	56.00	7.00	18.00	4219 3.002
M4 x 0,35	2.80	2.10	3.65	63.00	8.00	21.00	4219 4.002
M4 x 0,5	2.80	2.10	3.50	63.00	8.00	21.00	4219 4.003
M5 x 0,5	3.50	2.70	4.50	70.00	10.00	25.00	4219 5.003
M6 x 0,5	4.50	3.40	5.50	80.00	13.00	30.00	4219 6.003
M6 x 0,75	4.50	3.40	5.20	80.00	13.00	30.00	4219 6.004
M8 x 0,75	6.00	4.90	7.20	80.00	14.00	30.00	4219 8.004
M8 x 1	6.00	4.90	7.00	90.00	17.00	35.00	4219 8.005
M9 x 1	7.00	5.50	8.00	90.00	16.00	35.00	4219 9.005
M10 x 0,75	7.00	5.50	9.20	90.00	16.00	35.00	4219 10.004
M10 x 1	7.00	5.50	9.00	90.00	16.00	35.00	4219 10.005
M10 x 1,25	7.00	5.50	8.80	100.00	20.00	39.00	4219 10.006
M11 x 1	8.00	6.20	10.00	90.00	20.00	33.00	4219 11.005
M12 x 1	9.00	7.00	11.00	100.00	20.00	40.00	4219 12.005
M12 x 1,25	9.00	7.00	10.80	100.00	20.00	40.00	4219 12.006
M12 x 1,5	9.00	7.00	10.50	100.00	20.00	40.00	4219 12.007
M14 x 1	11.00	9.00	13.00	100.00	20.00	40.00	4219 14.005
M14 x 1,25	11.00	9.00	12.80	100.00	20.00	40.00	4219 14.006
M14 x 1,5	11.00	9.00	12.50	100.00	20.00	40.00	4219 14.007
M16 x 1	12.00	9.00	15.00	100.00	22.00	44.00	4219 16.005
M16 x 1,5	12.00	9.00	14.50	100.00	22.00	44.00	4219 16.007
M18 x 1	14.00	11.00	17.00	110.00	25.00	44.00	4219 18.005
M18 x 1,5	14.00	11.00	16.50	110.00	25.00	44.00	4219 18.007
M18 x 2	14.00	11.00	16.00	125.00	30.00	58.00	4219 18.008
M20 x 1	16.00	12.00	19.00	125.00	25.00	44.00	4219 20.005
M20 x 1,5	16.00	12.00	18.50	125.00	25.00	44.00	4219 20.007
M20 x 2	16.00	12.00	18.00	140.00	32.00	60.00	4219 20.008
M22 x 1	18.00	14.50	21.00	125.00	25.00	44.00	4219 22.005
M22 x 1,5	18.00	14.50	20.50	125.00	25.00	44.00	4219 22.007
M22 x 2	18.00	14.50	20.00	140.00	32.00	62.00	4219 22.008
M24 x 1	18.00	14.50	23.00	140.00	28.00	48.00	4219 24.005
M24 x 1,5	18.00	14.50	22.50	140.00	28.00	48.00	4219 24.007
M24 x 2	18.00	14.50	22.00	140.00	28.00	48.00	4219 24.008



Blind hole thread in a

valve body

for cooling lubricants

Industry:

Fluid technology

Material:

1.4301 / X5CrNi18-10

Target:

maximum tool life in large-scale batch production

The challenge

The valve body is used to control liquids, which is why the manufacturer relies on the excellent corrosion resistance of the chrome-nickel steel. However, the stainless austenitic high-grade steel has a high toughness and hardness, which makes deformation more difficult.

Tool wear during thread production in this material is as high as you would anticipate: The hard particles damage the fluteless tap's tool surfaces and the quality of the thread also suffers under the material's high strength. Even tool breakage is not uncommon, as only a few fluteless taps can withstand the extremely high elongation.

Fluteless tap InoxPro

PERFECT DIMENSIONAL ACCURACY

Tool solution

The new fluteless tap InoxPro succeeds where many conventional fluteless taps fail: its perfectly synced macro and micro geometry with an optimised lubricating flute geometry and polygon shape ensure reliable fluteless tapping in stainless steels.

To minimise tool wear, we also rely on a particularly smooth and temperature-resistant HiPIMS AlCrN coating. You can also rest assured that you'll enjoy the highest tool life and perfect dimensional accuracy for your threads in combination with water-mixed emulsions.

TOOL PERFORMANCE REPORT

	Werkzeug Wettbewerber	Fluteless tap InoxPro
Thread dimension	M8	M8
Cutting speed (v_c)	6 m/min	6 m/min
Speed (n)	238 rev/min	238 rev/min
Feed rate (v_f)	298 mm/min	298 mm/min
Thread depth (a_p)	20 mm	20 mm
Tool life	20 min	30 min

50 % longer tool life under otherwise identical conditions

Fluteless tap
INOXPRO







Fluteless taps with coolant ducts for ISO metric threads

Article no. **8100**



with internal cooling $\geq M5$ • maximum process reliability

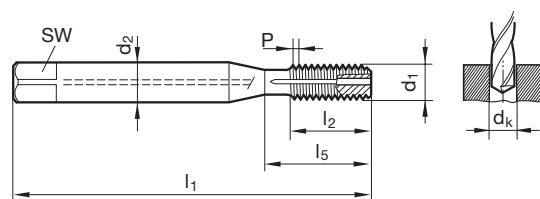

								Standard
								~DIN 371
								Article no. 8100
d1	P mm	d2 mm	SW mm	dk mm	l1 mm	l2 mm	l5 mm	Order no.
M2	0.400	2.80	2.10	1.85	45.00	3.20	13.50	8100 2.000
M2,5	0.450	2.80	2.10	2.30	50.00	3.60	14.50	8100 2.500
M3	0.500	3.50	2.70	2.80	56.00	4.80	18.00	8100 3.000
M4	0.700	4.50	3.40	3.70	63.00	6.40	21.00	8100 4.000
M5	0.800	6.00	4.90	4.65	70.00	6.40	25.00	8100 5.000
M6	1.000	6.00	4.90	5.55	80.00	8.00	30.00	8100 6.000
M8	1.250	8.00	6.20	7.40	90.00	11.20	35.00	8100 8.000
M10	1.500	10.00	8.00	9.30	100.00	12.00	39.00	8100 10.000
M12	1.750	9.00	7.00	11.20	110.00	14.00	49.00	8100 12.000





Fluteless taps with coolant ducts for ISO metric fine threads

Article no. 8101



- maximum process reliability

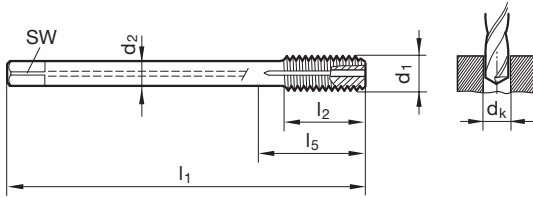

Standard

~DIN 371

Article no.

8101

d1	P	d2	SW	dk	l1	l2	l5	Order no.
M6 x 0,75	0.750	6.00	4.90	5.65	80.00	8.00	30.00	8101 6.004
M8 x 0,75	0.750	8.00	6.20	7.65	90.00	11.20	30.00	8101 8.004
M8 x 1	1.000	8.00	6.20	7.55	90.00	11.20	35.00	8101 8.005
M10 x 1	1.000	10.00	8.00	9.55	100.00	12.00	35.00	8101 10.005
M10 x 1,25	1.250	10.00	8.00	9.40	100.00	12.00	39.00	8101 10.006
M12 x 1	1.000	9.00	7.00	11.55	100.00	12.00	49.00	8101 12.005
M12 x 1,5	1.500	9.00	7.00	11.30	100.00	12.00	49.00	8101 12.007
M14 x 1,5	1.500	11.00	9.00	13.30	100.00	12.00	53.00	8101 14.007
M16 x 1,5	1.500	12.00	9.00	15.30	100.00	12.00	54.00	8101 16.007
M18 x 1,5	1.500	14.00	11.00	17.30	110.00	12.00	62.00	8101 18.007
M20 x 1,5	1.500	16.00	12.00	19.30	125.00	12.00	62.00	8101 20.007



Micro-precision drills without coolant ducts, 3xD



Machining group		f (mm/rev) with nom. Ø							
	v _c (m/min)	0,5	0,8	1	1,2	1,5	2	2,5	3
P1.1.1 Unalloyed steel, annealed, 0.15 % C, Rm 420 N/mm ² , 125 HB	90	0,0400	0,0640	0,0800	0,0960	0,1200	0,1600	0,2000	0,2400
P1.1.2 Unalloyed steel, heat-treated, 0.15 % C, Rm 420 N/mm ² , 125 HB	80	0,0360	0,0575	0,0720	0,0865	0,1080	0,1440	0,1800	0,2160
P1.1.3 Unalloyed steel, annealed, 0.45 % C, Rm 640 N/mm ² , 190 HB	80	0,0360	0,0575	0,0720	0,0865	0,1080	0,1440	0,1800	0,2160
P1.1.4 Unalloyed steel, heat-treated, 0.45 % C, Rm 640 N/mm ² , 190 HB	75	0,0340	0,0545	0,0680	0,0815	0,1020	0,1360	0,1700	0,2040
P1.1.5 Unalloyed steel, heat-treated, 0.45 % C, Rm 850 N/mm ² , 250 HB	75	0,0340	0,0545	0,0680	0,0815	0,1020	0,1360	0,1700	0,2040
P1.1.6 Unalloyed steel, annealed, 0.75 % C, Rm 915 N/mm ² , 270 HB	70	0,0320	0,0510	0,0640	0,0770	0,0960	0,1280	0,1600	0,1920
P1.1.7 Unalloyed steel, heat-treated, 0.75 % C, Rm 1020 N/mm ² , 300 HB	70	0,0300	0,0480	0,0600	0,0720	0,0900	0,1200	0,1500	0,1800
P2.1.1 Low-alloy steel, annealed, Rm 610 N/mm ² , 180 HB	80	0,0350	0,0560	0,0700	0,0840	0,1050	0,1400	0,1750	0,2100
P2.1.2 Low-alloy steel, heat-treated, Rm 930 N/mm ² , 275 HB	80	0,0350	0,0560	0,0700	0,0840	0,1050	0,1400	0,1750	0,2100
P2.1.3 Low-alloy steel, heat-treated, Rm 1020 N/mm ² , 300 HB	70	0,0300	0,0475	0,0595	0,0715	0,0895	0,1190	0,1490	0,1785
P2.1.4 Low-alloy steel, heat-treated, Rm 1190 N/mm ² , 350 HB	60	0,0265	0,0420	0,0525	0,0630	0,0790	0,1050	0,1315	0,1575
P3.1.1 High-alloy steel and tool steel, annealed, Rm 680 N/mm ² , 200 HB	60	0,0350	0,0560	0,0700	0,0840	0,1050	0,1400	0,1750	0,2100
P3.1.2 High-alloy steel and tool steel, hardened and tempered, Rm 1100 N/mm ² , 325 HB	50	0,0300	0,0475	0,0595	0,0715	0,0895	0,1190	0,1490	0,1785
M1.1.1 Stainless steel, ferritic/martensitic, with machining additives	40	0,0125	0,0200	0,0250	0,0300	0,0375	0,0500	0,0625	0,0750
M1.1.2 Stainless steel, ferritic/martensitic, annealed, Rm 680 N/mm ² , 200 HB	35	0,0115	0,0180	0,0225	0,0270	0,0340	0,0450	0,0565	0,0675
M1.1.3 Stainless steel, ferritic/martensitic, heat-treated, Rm 810 N/mm ² , 240 HB	35	0,0105	0,0170	0,0215	0,0255	0,0320	0,0425	0,0530	0,0640
M2.1.1 Stainless steel, austenitic, quenched, 180 HB	25	0,0075	0,0120	0,0150	0,0180	0,0225	0,0300	0,0375	0,0450
M2.2.1 Duplex steel, high-strength stainless steels	20	0,0065	0,0100	0,0130	0,0155	0,0190	0,0255	0,0320	0,0385
K1.1.1 Grey cast iron, pearlitic/ferritic, 180 HB									
K1.1.2 Grey cast iron, pearlitic/martensitic, 260 HB									
K1.2.1 Cast iron with spheroidal graphite, ferritic, 160 HB									
K1.2.2 Cast iron with spheroidal graphite, pearlitic, 250 HB									
K1.3.1 Malleable cast iron, ferritic, 130 HB									
K1.3.2 Malleable cast iron, pearlitic, 230 HB									
K2.1.1 Vermicular graphite cast iron (GJV)									
K2.2.1 Austenitic-ferritic spheroidal graphite cast iron (ADI)									
N1.1.1 Wrought aluminium alloys, non-hardened, 60 HB	270	0,0300	0,0480	0,0600	0,0720	0,0900	0,1200	0,1500	0,1800
N1.1.2 Wrought aluminium alloys, hardened, 100 HB	270	0,0300	0,0480	0,0600	0,0720	0,0900	0,1200	0,1500	0,1800
N2.1.1 Aluminium casting alloys, non-hardened, ≤ 12 % Si, 75 HB	180	0,0400	0,0640	0,0800	0,0960	0,1200	0,1600	0,2000	0,2400
N2.1.2 Aluminium casting alloys, hardened, ≤ 12 % Si, 90 HB	180	0,0400	0,0640	0,0800	0,0960	0,1200	0,1600	0,2000	0,2400
N2.1.3 Aluminium casting alloys, non-hardened, > 12 % Si, 130 HB	155	0,0340	0,0545	0,0680	0,0815	0,1020	0,1360	0,1700	0,2040
N3.1.1 Copper and copper alloys: Free-machining alloy, Pb > 1 %	125	0,0300	0,0480	0,0600	0,0720	0,0900	0,1200	0,1500	0,1800
N3.1.2 Copper and copper alloys: CuZn, CuSnZn	105	0,0255	0,0410	0,0510	0,0610	0,0765	0,1020	0,1275	0,1530
N3.1.3 Copper and copper alloys: CuSn, lead-free copper and copper electrolyte	100	0,0240	0,0385	0,0480	0,0575	0,0720	0,0960	0,1200	0,1440
N4.1.1 Non-metallic materials: Duroplastics, fibre-reinforced plastics									
N4.1.2 Non-metallic materials: Hard rubber, wood, etc.									
N4.1.3 Non-metallic materials: Graphite									
S1.1.1 Heat-resistant alloys, Fe-based, annealed, 200 HB	30	0,0100	0,0160	0,0200	0,0240	0,0300	0,0400	0,0500	0,0600
S1.1.2 Heat-resistant alloys, Fe-based, hardened, 280 HB	25	0,0080	0,0130	0,0160	0,0190	0,0240	0,0320	0,0400	0,0480
S1.1.3 Heat-resistant alloys, Ni- or Co-based, annealed, 250 HB	25	0,0100	0,0160	0,0200	0,0240	0,0300	0,0400	0,0500	0,0600
S1.1.4 Heat-resistant alloys, Ni- or Co-based, hardened, 350 HB	15	0,0070	0,0110	0,0140	0,0170	0,0210	0,0280	0,0350	0,0420
S1.1.5 Heat-resistant alloys, Ni- or Co-based, cast, 320 HB	20	0,0070	0,0110	0,0140	0,0170	0,0210	0,0280	0,0350	0,0420
S2.1.1 Titanium alloys, pure titanium, Rm 400 N/mm ²	25	0,0075	0,0120	0,0150	0,0180	0,0225	0,0300	0,0375	0,0450
S2.1.2 Titanium alloys, Alpha and Beta alloys, hardened, Rm 1050 N/mm ²	15	0,0060	0,0095	0,0120	0,0145	0,0180	0,0240	0,0300	0,0360
H1.1.1 Hardened steel, hardened and tempered, < 55 HRC									
H1.1.2 Hardened steel, hardened and tempered, < 60 HRC									
H1.1.3 Hardened steel, hardened and tempered, > 60 HRC									
H2.1.1 Chilled cast iron, 400 HB									
H2.1.2 Chilled cast iron, hardened and tempered, < 55 HRC									



Micro-precision drills with coolant ducts, ≤ 6xD



Machining group		f (mm/rev) with nom. Ø							
		1	1,2	1,5	1,8	2	2,2	2,5	3
P1.1.1 Unalloyed steel, annealed, 0.15 % C, Rm 420 N/mm ² , 125 HB	100	0,0500	0,0600	0,0750	0,0900	0,1000	0,1100	0,1250	0,1500
P1.1.2 Unalloyed steel, heat-treated, 0.15 % C, Rm 420 N/mm ² , 125 HB	90	0,0450	0,0540	0,0675	0,0810	0,0900	0,0990	0,1125	0,1350
P1.1.3 Unalloyed steel, annealed, 0.45 % C, Rm 640 N/mm ² , 190 HB	90	0,0450	0,0540	0,0675	0,0810	0,0900	0,0990	0,1125	0,1350
P1.1.4 Unalloyed steel, heat-treated, 0.45 % C, Rm 640 N/mm ² , 190 HB	85	0,0425	0,0510	0,0640	0,0765	0,0850	0,0935	0,1065	0,1275
P1.1.5 Unalloyed steel, heat-treated, 0.45 % C, Rm 850 N/mm ² , 250 HB	85	0,0425	0,0510	0,0640	0,0765	0,0850	0,0935	0,1065	0,1275
P1.1.6 Unalloyed steel, annealed, 0.75 % C, Rm 915 N/mm ² , 270 HB	80	0,0400	0,0480	0,0600	0,0720	0,0800	0,0880	0,1000	0,1200
P1.1.7 Unalloyed steel, heat-treated, 0.75 % C, Rm 1020 N/mm ² , 300 HB	75	0,0375	0,0450	0,0565	0,0675	0,0750	0,0825	0,0940	0,1125
P2.1.1 Low-alloy steel, annealed, Rm 610 N/mm ² , 180 HB	90	0,0500	0,0600	0,0750	0,0900	0,1000	0,1100	0,1250	0,1500
P2.1.2 Low-alloy steel, heat-treated, Rm 930 N/mm ² , 275 HB	90	0,0500	0,0600	0,0750	0,0900	0,1000	0,1100	0,1250	0,1500
P2.1.3 Low-alloy steel, heat-treated, Rm 1020 N/mm ² , 300 HB	75	0,0425	0,0510	0,0640	0,0765	0,0850	0,0935	0,1065	0,1275
P2.1.4 Low-alloy steel, heat-treated, Rm 1190 N/mm ² , 350 HB	70	0,0375	0,0450	0,0565	0,0675	0,0750	0,0825	0,0940	0,1125
P3.1.1 High-alloy steel and tool steel, annealed, Rm 680 N/mm ² , 200 HB	70	0,0500	0,0600	0,0750	0,0900	0,1000	0,1100	0,1250	0,1500
P3.1.2 High-alloy steel and tool steel, hardened and tempered, Rm 1100 N/mm ² , 325 HB	60	0,0425	0,0510	0,0640	0,0765	0,0850	0,0935	0,1065	0,1275
M1.1.1 Stainless steel, ferritic/martensitic, with machining additives	100	0,0370	0,0445	0,0555	0,0665	0,0740	0,0815	0,0925	0,1110
M1.1.2 Stainless steel, ferritic/martensitic, annealed, Rm 680 N/mm ² , 200 HB	90	0,0335	0,0400	0,0500	0,0600	0,0665	0,0735	0,0830	0,1000
M1.1.3 Stainless steel, ferritic/martensitic, heat-treated, Rm 810 N/mm ² , 240 HB	85	0,0315	0,0375	0,0470	0,0565	0,0630	0,0690	0,0785	0,0945
M2.1.1 Stainless steel, austenitic, quenched, 180 HB	80	0,0300	0,0360	0,0450	0,0540	0,0600	0,0660	0,0750	0,0900
M2.2.1 Duplex steel, high-strength stainless steels	70	0,0255	0,0305	0,0385	0,0460	0,0510	0,0560	0,0640	0,0765
K1.1.1 Grey cast iron, pearlitic/ferritic, 180 HB									
K1.1.2 Grey cast iron, pearlitic/martensitic, 260 HB									
K1.2.1 Cast iron with spheroidal graphite, ferritic, 160 HB									
K1.2.2 Cast iron with spheroidal graphite, pearlitic, 250 HB									
K1.3.1 Malleable cast iron, ferritic, 130 HB									
K1.3.2 Malleable cast iron, pearlitic, 230 HB									
K2.1.1 Vermicular graphite cast iron (GJV)									
K2.2.1 Austenitic-ferritic spheroidal graphite cast iron (ADI)									
N1.1.1 Wrought aluminium alloys, non-hardened, 60 HB	300	0,0600	0,0720	0,0900	0,1080	0,1200	0,1320	0,1500	0,1800
N1.1.2 Wrought aluminium alloys, hardened, 100 HB	300	0,0600	0,0720	0,0900	0,1080	0,1200	0,1320	0,1500	0,1800
N2.1.1 Aluminium casting alloys, non-hardened, ≤ 12 % Si, 75 HB	200	0,0800	0,0960	0,1200	0,1440	0,1600	0,1760	0,2000	0,2400
N2.1.2 Aluminium casting alloys, hardened, ≤ 12 % Si, 90 HB	200	0,0800	0,0960	0,1200	0,1440	0,1600	0,1760	0,2000	0,2400
N2.1.3 Aluminium casting alloys, non-hardened, > 12 % Si, 130 HB	170	0,0680	0,0815	0,1020	0,1225	0,1360	0,1495	0,1700	0,2040
N3.1.1 Copper and copper alloys: Free-machining alloy, Pb > 1 %	150	0,0500	0,0600	0,0750	0,0900	0,1000	0,1100	0,1250	0,1500
N3.1.2 Copper and copper alloys: CuZn, CuSnZn	130	0,0425	0,0510	0,0640	0,0765	0,0850	0,0935	0,1065	0,1275
N3.1.3 Copper and copper alloys: CuSn, lead-free copper and copper electrolyte	120	0,0400	0,0480	0,0600	0,0720	0,0800	0,0880	0,1000	0,1200
N4.1.1 Non-metallic materials: Duroplastics, fibre-reinforced plastics									
N4.1.2 Non-metallic materials: Hard rubber, wood, etc.									
N4.1.3 Non-metallic materials: Graphite									
S1.1.1 Heat-resistant alloys, Fe-based, annealed, 200 HB	50	0,0200	0,0240	0,0300	0,0360	0,0400	0,0440	0,0500	0,0600
S1.1.2 Heat-resistant alloys, Fe-based, hardened, 280 HB	40	0,0160	0,0190	0,0240	0,0290	0,0320	0,0350	0,0400	0,0480
S1.1.3 Heat-resistant alloys, Ni- or Co-based, annealed, 250 HB	45	0,0200	0,0240	0,0300	0,0360	0,0400	0,0440	0,0500	0,0600
S1.1.4 Heat-resistant alloys, Ni- or Co-based, hardened, 350 HB	30	0,0140	0,0170	0,0210	0,0250	0,0280	0,0310	0,0350	0,0420
S1.1.5 Heat-resistant alloys, Ni- or Co-based, cast, 320 HB	30	0,0140	0,0170	0,0210	0,0250	0,0280	0,0310	0,0350	0,0420
S2.1.1 Titanium alloys, pure titanium, Rm 400 N/mm ²	45	0,0150	0,0180	0,0225	0,0270	0,0300	0,0330	0,0375	0,0450
S2.1.2 Titanium alloys, Alpha and Beta alloys, hardened, Rm 1050 N/mm ²	35	0,0120	0,0145	0,0180	0,0215	0,0240	0,0265	0,0300	0,0360
H1.1.1 Hardened steel, hardened and tempered, < 55 HRC									
H1.1.2 Hardened steel, hardened and tempered, < 60 HRC									
H1.1.3 Hardened steel, hardened and tempered, > 60 HRC									
H2.1.1 Chilled cast iron, 400 HB									
H2.1.2 Chilled cast iron, hardened and tempered, < 55 HRC									



Micro-precision drills with coolant ducts, > 6xD



Machining group		f (mm/rev) with nom. Ø							
	v _c (m/min)	1	1,2	1,5	1,8	2	2,2	2,5	3
P1.1.1 Unalloyed steel, annealed, 0.15 % C, Rm 420 N/mm ² , 125 HB	100	0,0300	0,0360	0,0450	0,0540	0,0600	0,0660	0,0750	0,0900
P1.1.2 Unalloyed steel, heat-treated, 0.15 % C, Rm 420 N/mm ² , 125 HB	90	0,0270	0,0325	0,0405	0,0485	0,0540	0,0595	0,0675	0,0810
P1.1.3 Unalloyed steel, annealed, 0.45 % C, Rm 640 N/mm ² , 190 HB	90	0,0270	0,0325	0,0405	0,0485	0,0540	0,0595	0,0675	0,0810
P1.1.4 Unalloyed steel, heat-treated, 0.45 % C, Rm 640 N/mm ² , 190 HB	85	0,0255	0,0305	0,0385	0,0460	0,0510	0,0560	0,0640	0,0765
P1.1.5 Unalloyed steel, heat-treated, 0.45 % C, Rm 850 N/mm ² , 250 HB	85	0,0255	0,0305	0,0385	0,0460	0,0510	0,0560	0,0640	0,0765
P1.1.6 Unalloyed steel, annealed, 0.75 % C, Rm 915 N/mm ² , 270 HB	80	0,0240	0,0290	0,0360	0,0430	0,0480	0,0530	0,0600	0,0720
P1.1.7 Unalloyed steel, heat-treated, 0.75 % C, Rm 1020 N/mm ² , 300 HB	75	0,0225	0,0270	0,0340	0,0405	0,0450	0,0495	0,0560	0,0675
P2.1.1 Low-alloy steel, annealed, Rm 610 N/mm ² , 180 HB	90	0,0300	0,0360	0,0450	0,0540	0,0600	0,0660	0,0750	0,0900
P2.1.2 Low-alloy steel, heat-treated, Rm 930 N/mm ² , 275 HB	90	0,0300	0,0360	0,0450	0,0540	0,0600	0,0660	0,0750	0,0900
P2.1.3 Low-alloy steel, heat-treated, Rm 1020 N/mm ² , 300 HB	75	0,0255	0,0305	0,0385	0,0460	0,0510	0,0560	0,0640	0,0765
P2.1.4 Low-alloy steel, heat-treated, Rm 1190 N/mm ² , 350 HB	70	0,0225	0,0270	0,0340	0,0405	0,0450	0,0495	0,0560	0,0675
P3.1.1 High-alloy steel and tool steel, annealed, Rm 680 N/mm ² , 200 HB	70	0,0300	0,0360	0,0450	0,0540	0,0600	0,0660	0,0750	0,0900
P3.1.2 High-alloy steel and tool steel, hardened and tempered, Rm 1100 N/mm ² , 325 HB	60	0,0255	0,0305	0,0385	0,0460	0,0510	0,0560	0,0640	0,0765
M1.1.1 Stainless steel, ferritic/martensitic, with machining additives	100	0,0370	0,0445	0,0555	0,0665	0,0740	0,0815	0,0925	0,1110
M1.1.2 Stainless steel, ferritic/martensitic, annealed, Rm 680 N/mm ² , 200 HB	90	0,0335	0,0400	0,0500	0,0600	0,0665	0,0735	0,0830	0,1000
M1.1.3 Stainless steel, ferritic/martensitic, heat-treated, Rm 810 N/mm ² , 240 HB	85	0,0315	0,0375	0,0470	0,0565	0,0630	0,0690	0,0785	0,0945
M2.1.1 Stainless steel, austenitic, quenched, 180 HB	80	0,0300	0,0360	0,0450	0,0540	0,0600	0,0660	0,0750	0,0900
M2.2.1 Duplex steel, high-strength stainless steels	70	0,0255	0,0305	0,0385	0,0460	0,0510	0,0560	0,0640	0,0765
K1.1.1 Grey cast iron, pearlitic/ferritic, 180 HB									
K1.1.2 Grey cast iron, pearlitic/martensitic, 260 HB									
K1.2.1 Cast iron with spheroidal graphite, ferritic, 160 HB									
K1.2.2 Cast iron with spheroidal graphite, pearlitic, 250 HB									
K1.3.1 Malleable cast iron, ferritic, 130 HB									
K1.3.2 Malleable cast iron, pearlitic, 230 HB									
K2.1.1 Vermicular graphite cast iron (GJV)									
K2.2.1 Austenitic-ferritic spheroidal graphite cast iron (ADI)									
N1.1.1 Wrought aluminium alloys, non-hardened, 60 HB	300	0,0400	0,0480	0,0600	0,0720	0,0800	0,0880	0,1000	0,1200
N1.1.2 Wrought aluminium alloys, hardened, 100 HB	300	0,0400	0,0480	0,0600	0,0720	0,0800	0,0880	0,1000	0,1200
N2.1.1 Aluminium casting alloys, non-hardened, ≤ 12 % Si, 75 HB	200	0,0600	0,0720	0,0900	0,1080	0,1200	0,1320	0,1500	0,1800
N2.1.2 Aluminium casting alloys, hardened, ≤ 12 % Si, 90 HB	200	0,0600	0,0720	0,0900	0,1080	0,1200	0,1320	0,1500	0,1800
N2.1.3 Aluminium casting alloys, non-hardened, > 12 % Si, 130 HB	170	0,0510	0,0610	0,0765	0,0920	0,1020	0,1120	0,1275	0,1530
N3.1.1 Copper and copper alloys: Free-machining alloy, Pb > 1 %	150	0,0300	0,0360	0,0450	0,0540	0,0600	0,0660	0,0750	0,0900
N3.1.2 Copper and copper alloys: CuZn, CuSnZn	130	0,0255	0,0305	0,0385	0,0460	0,0510	0,0560	0,0640	0,0765
N3.1.3 Copper and copper alloys: CuSn, lead-free copper and copper electrolyte	120	0,0240	0,0290	0,0360	0,0430	0,0480	0,0530	0,0600	0,0720
N4.1.1 Non-metallic materials: Duroplastics, fibre-reinforced plastics									
N4.1.2 Non-metallic materials: Hard rubber, wood, etc.									
N4.1.3 Non-metallic materials: Graphite									
S1.1.1 Heat-resistant alloys, Fe-based, annealed, 200 HB	50	0,0200	0,0240	0,0300	0,0360	0,0400	0,0440	0,0500	0,0600
S1.1.2 Heat-resistant alloys, Fe-based, hardened, 280 HB	40	0,0160	0,0190	0,0240	0,0290	0,0320	0,0350	0,0400	0,0480
S1.1.3 Heat-resistant alloys, Ni- or Co-based, annealed, 250 HB	45	0,0200	0,0240	0,0300	0,0360	0,0400	0,0440	0,0500	0,0600
S1.1.4 Heat-resistant alloys, Ni- or Co-based, hardened, 350 HB	30	0,0140	0,0170	0,0210	0,0250	0,0280	0,0310	0,0350	0,0420
S1.1.5 Heat-resistant alloys, Ni- or Co-based, cast, 320 HB	30	0,0140	0,0170	0,0210	0,0250	0,0280	0,0310	0,0350	0,0420
S2.1.1 Titanium alloys, pure titanium, Rm 400 N/mm ²	40	0,0120	0,0145	0,0180	0,0215	0,0240	0,0265	0,0300	0,0360
S2.1.2 Titanium alloys, Alpha and Beta alloys, hardened, Rm 1050 N/mm ²	30	0,0095	0,0115	0,0145	0,0175	0,0190	0,0210	0,0240	0,0290
H1.1.1 Hardened steel, hardened and tempered, < 55 HRC									
H1.1.2 Hardened steel, hardened and tempered, < 60 HRC									
H1.1.3 Hardened steel, hardened and tempered, > 60 HRC									
H2.1.1 Chilled cast iron, 400 HB									
H2.1.2 Chilled cast iron, hardened and tempered, < 55 HRC									



Ratio drills with coolant ducts, RT 100 InoxPro, 3xD und 5xD



Machining group		f (mm/rev) with nom. Ø								
	v _c (m/min)	3	4	6	8	10	12	14	16	20
P1.1.1 Unalloyed steel, annealed, 0.15 % C, Rm 420 N/mm ² , 125 HB	140	0,155	0,190	0,260	0,325	0,385	0,440	0,495	0,550	0,650
P1.1.2 Unalloyed steel, heat-treated, 0.15 % C, Rm 420 N/mm ² , 125 HB	125	0,140	0,170	0,235	0,290	0,345	0,395	0,445	0,495	0,585
P1.1.3 Unalloyed steel, annealed, 0.45 % C, Rm 640 N/mm ² , 190 HB	125	0,140	0,170	0,235	0,290	0,345	0,395	0,445	0,495	0,585
P1.1.4 Unalloyed steel, heat-treated, 0.45 % C, Rm 640 N/mm ² , 190 HB	120	0,130	0,165	0,220	0,275	0,325	0,375	0,420	0,465	0,555
P1.1.5 Unalloyed steel, heat-treated, 0.45 % C, Rm 850 N/mm ² , 250 HB	120	0,130	0,165	0,220	0,275	0,325	0,375	0,420	0,465	0,555
P1.1.6 Unalloyed steel, annealed, 0.75 % C, Rm 915 N/mm ² , 270 HB	110	0,125	0,155	0,210	0,260	0,305	0,355	0,395	0,440	0,520
P1.1.7 Unalloyed steel, heat-treated, 0.75 % C, Rm 1020 N/mm ² , 300 HB	105	0,115	0,145	0,195	0,245	0,290	0,330	0,370	0,410	0,490
P2.1.1 Low-alloy steel, annealed, Rm 610 N/mm ² , 180 HB	115	0,125	0,155	0,210	0,260	0,305	0,355	0,395	0,440	0,520
P2.1.2 Low-alloy steel, heat-treated, Rm 930 N/mm ² , 275 HB	115	0,125	0,155	0,210	0,260	0,305	0,355	0,395	0,440	0,520
P2.1.3 Low-alloy steel, heat-treated, Rm 1020 N/mm ² , 300 HB	100	0,105	0,130	0,175	0,220	0,260	0,300	0,335	0,375	0,440
P2.1.4 Low-alloy steel, heat-treated, Rm 1190 N/mm ² , 350 HB	85	0,090	0,115	0,155	0,195	0,230	0,265	0,295	0,330	0,390
P3.1.1 High-alloy steel and tool steel, annealed, Rm 680 N/mm ² , 200 HB	75	0,095	0,120	0,165	0,205	0,240	0,275	0,310	0,345	0,405
P3.1.2 High-alloy steel and tool steel, hardened and tempered, Rm 1100 N/mm ² , 325 HB	65	0,080	0,100	0,140	0,170	0,205	0,235	0,265	0,290	0,345
M1.1.1 Stainless steel, ferritic/martensitic, with machining additives	105	0,095	0,120	0,165	0,205	0,240	0,275	0,310	0,345	0,405
M1.1.2 Stainless steel, ferritic/martensitic, annealed, Rm 680 N/mm ² , 200 HB	95	0,085	0,110	0,145	0,180	0,215	0,250	0,280	0,310	0,365
M1.1.3 Stainless steel, ferritic/martensitic, heat-treated, Rm 810 N/mm ² , 240 HB	90	0,080	0,100	0,140	0,170	0,205	0,235	0,265	0,290	0,345
M2.1.1 Stainless steel, austenitic, quenched, 180 HB	85	0,075	0,095	0,130	0,160	0,190	0,220	0,250	0,275	0,325
M2.2.1 Duplex steel, high-strength stainless steels	70	0,065	0,080	0,110	0,140	0,165	0,185	0,210	0,235	0,275
K1.1.1 Grey cast iron, pearlitic/ferritic, 180 HB										
K1.1.2 Grey cast iron, pearlitic/martensitic, 260 HB										
K1.2.1 Cast iron with spheroidal graphite, ferritic, 160 HB										
K1.2.2 Cast iron with spheroidal graphite, pearlitic, 250 HB										
K1.3.1 Malleable cast iron, ferritic, 130 HB										
K1.3.2 Malleable cast iron, pearlitic, 230 HB										
K2.1.1 Vermicular graphite cast iron (GJV)										
K2.2.1 Austenitic-ferritic spheroidal graphite cast iron (ADI)										
N1.1.1 Wrought aluminium alloys, non-hardened, 60 HB										
N1.1.2 Wrought aluminium alloys, hardened, 100 HB										
N2.1.1 Aluminium casting alloys, non-hardened, ≤ 12 % Si, 75 HB										
N2.1.2 Aluminium casting alloys, hardened, ≤ 12 % Si, 90 HB										
N2.1.3 Aluminium casting alloys, non-hardened, > 12 % Si, 130 HB										
N3.1.1 Copper and copper alloys: Free-machining alloy, Pb > 1 %										
N3.1.2 Copper and copper alloys: CuZn, CuSnZn										
N3.1.3 Copper and copper alloys: CuSn, lead-free copper and copper electrolyte										
N4.1.1 Non-metallic materials: Duroplastics, fibre-reinforced plastics										
N4.1.2 Non-metallic materials: Hard rubber, wood, etc.										
N4.1.3 Non-metallic materials: Graphite										
S1.1.1 Heat-resistant alloys, Fe-based, annealed, 200 HB	60	0,060	0,075	0,105	0,130	0,155	0,175	0,200	0,220	0,260
S1.1.2 Heat-resistant alloys, Fe-based, hardened, 280 HB	50	0,050	0,060	0,085	0,105	0,120	0,140	0,160	0,175	0,205
S1.1.3 Heat-resistant alloys, Ni- or Co-based, annealed, 250 HB	50	0,060	0,075	0,105	0,130	0,155	0,175	0,200	0,220	0,260
S1.1.4 Heat-resistant alloys, Ni- or Co-based, hardened, 350 HB	35	0,045	0,055	0,075	0,090	0,105	0,125	0,140	0,155	0,180
S1.1.5 Heat-resistant alloys, Ni- or Co-based, cast, 320 HB	35	0,045	0,055	0,075	0,090	0,105	0,125	0,140	0,155	0,180
S2.1.1 Titanium alloys, pure titanium, Rm 400 N/mm ²	60	0,060	0,075	0,105	0,130	0,155	0,175	0,200	0,220	0,260
S2.1.2 Titanium alloys, Alpha and Beta alloys, hardened, Rm 1050 N/mm ²	45	0,050	0,060	0,085	0,105	0,120	0,140	0,160	0,175	0,205
H1.1.1 Hardened steel, hardened and tempered, < 55 HRC										
H1.1.2 Hardened steel, hardened and tempered, < 60 HRC										
H1.1.3 Hardened steel, hardened and tempered, > 60 HRC										
H2.1.1 Chilled cast iron, 400 HB										
H2.1.2 Chilled cast iron, hardened and tempered, < 55 HRC										



Ratio drills with coolant ducts, RT 100 InoxPro, 7xD



Machining group		f (mm/rev) with nom. Ø								
										
	v _c (m/min)	3	4	6	8	10	12	14	16	20
P1.1.1 Unalloyed steel, annealed, 0.15 % C, Rm 420 N/mm ² , 125 HB	140	0,125	0,155	0,210	0,260	0,305	0,355	0,395	0,440	0,520
P1.1.2 Unalloyed steel, heat-treated, 0.15 % C, Rm 420 N/mm ² , 125 HB	125	0,110	0,140	0,185	0,235	0,275	0,315	0,355	0,395	0,470
P1.1.3 Unalloyed steel, annealed, 0.45 % C, Rm 640 N/mm ² , 190 HB	125	0,110	0,140	0,185	0,235	0,275	0,315	0,355	0,395	0,470
P1.1.4 Unalloyed steel, heat-treated, 0.45 % C, Rm 640 N/mm ² , 190 HB	120	0,105	0,130	0,175	0,220	0,260	0,300	0,335	0,375	0,440
P1.1.5 Unalloyed steel, heat-treated, 0.45 % C, Rm 850 N/mm ² , 250 HB	120	0,105	0,130	0,175	0,220	0,260	0,300	0,335	0,375	0,440
P1.1.6 Unalloyed steel, annealed, 0.75 % C, Rm 915 N/mm ² , 270 HB	110	0,100	0,120	0,165	0,205	0,245	0,280	0,315	0,350	0,415
P1.1.7 Unalloyed steel, heat-treated, 0.75 % C, Rm 1020 N/mm ² , 300 HB	105	0,090	0,115	0,155	0,195	0,230	0,265	0,295	0,330	0,390
P2.1.1 Low-alloy steel, annealed, Rm 610 N/mm ² , 180 HB	115	0,095	0,120	0,165	0,205	0,240	0,275	0,310	0,345	0,405
P2.1.2 Low-alloy steel, heat-treated, Rm 930 N/mm ² , 275 HB	115	0,095	0,120	0,165	0,205	0,240	0,275	0,310	0,345	0,405
P2.1.3 Low-alloy steel, heat-treated, Rm 1020 N/mm ² , 300 HB	100	0,080	0,100	0,140	0,170	0,205	0,235	0,265	0,290	0,345
P2.1.4 Low-alloy steel, heat-treated, Rm 1190 N/mm ² , 350 HB	85	0,070	0,090	0,120	0,150	0,180	0,205	0,230	0,255	0,305
P3.1.1 High-alloy steel and tool steel, annealed, Rm 680 N/mm ² , 200 HB	75	0,075	0,095	0,130	0,160	0,190	0,220	0,250	0,275	0,325
P3.1.2 High-alloy steel and tool steel, hardened and tempered, Rm 1100 N/mm ² , 325 HB	65	0,065	0,080	0,110	0,140	0,165	0,185	0,210	0,235	0,275
M1.1.1 Stainless steel, ferritic/martensitic, with machining additives	100	0,075	0,095	0,130	0,160	0,190	0,220	0,250	0,275	0,325
M1.1.2 Stainless steel, ferritic/martensitic, annealed, Rm 680 N/mm ² , 200 HB	90	0,070	0,085	0,115	0,145	0,175	0,200	0,225	0,245	0,295
M1.1.3 Stainless steel, ferritic/martensitic, heat-treated, Rm 810 N/mm ² , 240 HB	85	0,065	0,080	0,110	0,140	0,165	0,185	0,210	0,235	0,275
M2.1.1 Stainless steel, austenitic, quenched, 180 HB	80	0,060	0,075	0,105	0,130	0,155	0,175	0,200	0,220	0,260
M2.2.1 Duplex steel, high-strength stainless steels	70	0,050	0,065	0,090	0,110	0,130	0,150	0,170	0,185	0,220
K1.1.1 Grey cast iron, pearlitic/ferritic, 180 HB										
K1.1.2 Grey cast iron, pearlitic/martensitic, 260 HB										
K1.2.1 Cast iron with spheroidal graphite, ferritic, 160 HB										
K1.2.2 Cast iron with spheroidal graphite, pearlitic, 250 HB										
K1.3.1 Malleable cast iron, ferritic, 130 HB										
K1.3.2 Malleable cast iron, pearlitic, 230 HB										
K2.1.1 Vermicular graphite cast iron (GJV)										
K2.2.1 Austenitic-ferritic spheroidal graphite cast iron (ADI)										
N1.1.1 Wrought aluminium alloys, non-hardened, 60 HB										
N1.1.2 Wrought aluminium alloys, hardened, 100 HB										
N2.1.1 Aluminium casting alloys, non-hardened, ≤ 12 % Si, 75 HB										
N2.1.2 Aluminium casting alloys, hardened, ≤ 12 % Si, 90 HB										
N2.1.3 Aluminium casting alloys, non-hardened, > 12 % Si, 130 HB										
N3.1.1 Copper and copper alloys: Free-machining alloy, Pb > 1 %										
N3.1.2 Copper and copper alloys: CuZn, CuSnZn										
N3.1.3 Copper and copper alloys: CuSn, lead-free copper and copper electrolyte										
N4.1.1 Non-metallic materials: Duroplastics, fibre-reinforced plastics										
N4.1.2 Non-metallic materials: Hard rubber, wood, etc.										
N4.1.3 Non-metallic materials: Graphite										
S1.1.1 Heat-resistant alloys, Fe-based, annealed, 200 HB	45	0,050	0,060	0,080	0,100	0,120	0,140	0,155	0,175	0,205
S1.1.2 Heat-resistant alloys, Fe-based, hardened, 280 HB	35	0,040	0,050	0,065	0,080	0,095	0,110	0,125	0,140	0,165
S1.1.3 Heat-resistant alloys, Ni- or Co-based, annealed, 250 HB	40	0,050	0,060	0,080	0,100	0,120	0,140	0,155	0,175	0,205
S1.1.4 Heat-resistant alloys, Ni- or Co-based, hardened, 350 HB	25	0,035	0,040	0,055	0,070	0,085	0,095	0,110	0,120	0,145
S1.1.5 Heat-resistant alloys, Ni- or Co-based, cast, 320 HB	25	0,035	0,040	0,055	0,070	0,085	0,095	0,110	0,120	0,145
S2.1.1 Titanium alloys, pure titanium, Rm 400 N/mm ²	45	0,050	0,060	0,080	0,100	0,120	0,140	0,155	0,175	0,205
S2.1.2 Titanium alloys, Alpha and Beta alloys, hardened, Rm 1050 N/mm ²	35	0,040	0,050	0,065	0,080	0,095	0,110	0,125	0,140	0,165
H1.1.1 Hardened steel, hardened and tempered, < 55 HRC										
H1.1.2 Hardened steel, hardened and tempered, < 60 HRC										
H1.1.3 Hardened steel, hardened and tempered, > 60 HRC										
H2.1.1 Chilled cast iron, 400 HB										
H2.1.2 Chilled cast iron, hardened and tempered, < 55 HRC										



High-performance taps and fluteless taps Pionex



Machining group	Taps				Fluteless taps
	Blind holes		Through-holes		
	HSS-E	HSS-E-PM	HSS-E	HSS-E-PM	HSS-E-PM
					
	v _c (m/min)				
P1.1.1 Unalloyed steel, annealed, 0.15 % C, Rm 420 N/mm ² , 125 HB	18	23	20	26	27
P1.1.2 Unalloyed steel, heat-treated, 0.15 % C, Rm 420 N/mm ² , 125 HB	18	23	20	26	27
P1.1.3 Unalloyed steel, annealed, 0.45 % C, Rm 640 N/mm ² , 190 HB	18	23	20	26	27
P1.1.4 Unalloyed steel, heat-treated, 0.45 % C, Rm 640 N/mm ² , 190 HB	18	23	20	26	27
P1.1.5 Unalloyed steel, heat-treated, 0.45 % C, Rm 850 N/mm ² , 250 HB	18	23	20	26	27
P1.1.6 Unalloyed steel, annealed, 0.75 % C, Rm 915 N/mm ² , 270 HB	15	20	17	22	27
P1.1.7 Unalloyed steel, heat-treated, 0.75 % C, Rm 1020 N/mm ² , 300 HB	13	16	14	18	27
P2.1.1 Low-alloy steel, annealed, Rm 610 N/mm ² , 180 HB	18	23	20	26	22
P2.1.2 Low-alloy steel, heat-treated, Rm 930 N/mm ² , 275 HB	15	20	17	22	22
P2.1.3 Low-alloy steel, heat-treated, Rm 1020 N/mm ² , 300 HB	13	16	14	18	22
P2.1.4 Low-alloy steel, heat-treated, Rm 1190 N/mm ² , 350 HB	11	14	12	15	22
P3.1.1 High-alloy steel and tool steel, annealed, Rm 680 N/mm ² , 200 HB	11	14	12	15	16
P3.1.2 High-alloy steel and tool steel, hardened and tempered, Rm 1100 N/mm ² , 325 HB	11	14	12	15	16
M1.1.1 Stainless steel, ferritic/martensitic, with machining additives	11	14	12	15	11
M1.1.2 Stainless steel, ferritic/martensitic, annealed, Rm 680 N/mm ² , 200 HB	11	14	12	15	11
M1.1.3 Stainless steel, ferritic/martensitic, heat-treated, Rm 810 N/mm ² , 240 HB	6	8	7	9	8
M2.1.1 Stainless steel, austenitic, quenched, 180 HB	4	5	4	5	7
M2.2.1 Duplex steel, high-strength stainless steels	3	4	3	4	
K1.1.1 Grey cast iron, pearlitic/ferritic, 180 HB	14	19	16	21	
K1.1.2 Grey cast iron, pearlitic/martensitic, 260 HB	14	19	16	21	
K1.2.1 Cast iron with spheroidal graphite, ferritic, 160 HB	14	19	16	21	27
K1.2.2 Cast iron with spheroidal graphite, pearlitic, 250 HB	14	19	16	21	27
K1.3.1 Malleable cast iron, ferritic, 130 HB	14	19	16	21	27
K1.3.2 Malleable cast iron, pearlitic, 230 HB	14	19	16	21	27
K2.1.1 Vermicular graphite cast iron (GJV)	9	11	10	12	22
K2.2.1 Austenitic-ferritic spheroidal graphite cast iron (ADI)	9	11	10	12	22
N1.1.1 Wrought aluminium alloys, non-hardened, 60 HB	25	33	28	36	17
N1.1.2 Wrought aluminium alloys, hardened, 100 HB	25	33	28	36	17
N2.1.1 Aluminium casting alloys, non-hardened, ≤ 12 % Si, 75 HB	20	26	22	29	33
N2.1.2 Aluminium casting alloys, hardened, ≤ 12 % Si, 90 HB	20	26	22	29	33
N2.1.3 Aluminium casting alloys, non-hardened, > 12 % Si, 130 HB	15	20	17	22	27
N3.1.1 Copper and copper alloys: Free-machining alloy, Pb > 1 %					
N3.1.2 Copper and copper alloys: CuZn, CuSnZn					
N3.1.3 Copper and copper alloys: CuSn, lead-free copper and copper electrolyte					
N4.1.1 Non-metallic materials: Duroplastics, fibre-reinforced plastics					
N4.1.2 Non-metallic materials: Hard rubber, wood, etc.					
N4.1.3 Non-metallic materials: Graphite					
S1.1.1 Heat-resistant alloys, Fe-based, annealed, 200 HB	2	2	2	2	4
S1.1.2 Heat-resistant alloys, Fe-based, hardened, 280 HB	2	2	2	2	4
S1.1.3 Heat-resistant alloys, Ni- or Co-based, annealed, 250 HB	2	2	2	2	4
S1.1.4 Heat-resistant alloys, Ni- or Co-based, hardened, 350 HB	2	2	2	2	4
S1.1.5 Heat-resistant alloys, Ni- or Co-based, cast, 320 HB	2	2	2	2	4
S2.1.1 Titanium alloys, pure titanium, Rm 400 N/mm ²	2	2	2	2	4
S2.1.2 Titanium alloys, Alpha and Beta alloys, hardened, Rm 1050 N/mm ²	2	2	2	2	4
H1.1.1 Hardened steel, hardened and tempered, < 55 HRC					
H1.1.2 Hardened steel, hardened and tempered, < 60 HRC					
H1.1.3 Hardened steel, hardened and tempered, > 60 HRC					
H2.1.1 Chilled cast iron, 400 HB					
H2.1.2 Chilled cast iron, hardened and tempered, < 55 HRC					



Fluteless taps InoxPro



Machining group	Through-, blind holes
	HSS-E
	v_c (m/min)
P1.1.1 Unalloyed steel, annealed, 0.15 % C, Rm 420 N/mm ² , 125 HB	
P1.1.2 Unalloyed steel, heat-treated, 0.15 % C, Rm 420 N/mm ² , 125 HB	
P1.1.3 Unalloyed steel, annealed, 0.45 % C, Rm 640 N/mm ² , 190 HB	
P1.1.4 Unalloyed steel, heat-treated, 0.45 % C, Rm 640 N/mm ² , 190 HB	
P1.1.5 Unalloyed steel, heat-treated, 0.45 % C, Rm 850 N/mm ² , 250 HB	
P1.1.6 Unalloyed steel, annealed, 0.75 % C, Rm 915 N/mm ² , 270 HB	
P1.1.7 Unalloyed steel, heat-treated, 0.75 % C, Rm 1020 N/mm ² , 300 HB	
P2.1.1 Low-alloy steel, annealed, Rm 610 N/mm ² , 180 HB	
P2.1.2 Low-alloy steel, heat-treated, Rm 930 N/mm ² , 275 HB	
P2.1.3 Low-alloy steel, heat-treated, Rm 1020 N/mm ² , 300 HB	
P2.1.4 Low-alloy steel, heat-treated, Rm 1190 N/mm ² , 350 HB	
P3.1.1 High-alloy steel and tool steel, annealed, Rm 680 N/mm ² , 200 HB	
P3.1.2 High-alloy steel and tool steel, hardened and tempered, Rm 1100 N/mm ² , 325 HB	
M1.1.1 Stainless steel, ferritic/martensitic, with machining additives	10
M1.1.2 Stainless steel, ferritic/martensitic, annealed, Rm 680 N/mm ² , 200 HB	10
M1.1.3 Stainless steel, ferritic/martensitic, heat-treated, Rm 810 N/mm ² , 240 HB	7
M2.1.1 Stainless steel, austenitic, quenched, 180 HB	6
M2.2.1 Duplex steel, high-strength stainless steels	6
K1.1.1 Grey cast iron, pearlitic/ferritic, 180 HB	
K1.1.2 Grey cast iron, pearlitic/martensitic, 260 HB	
K1.2.1 Cast iron with spheroidal graphite, ferritic, 160 HB	
K1.2.2 Cast iron with spheroidal graphite, pearlitic, 250 HB	
K1.3.1 Malleable cast iron, ferritic, 130 HB	
K1.3.2 Malleable cast iron, pearlitic, 230 HB	
K2.1.1 Vermicular graphite cast iron (GJV)	
K2.2.1 Austenitic-ferritic spheroidal graphite cast iron (ADI)	
N1.1.1 Wrought aluminium alloys, non-hardened, 60 HB	
N1.1.2 Wrought aluminium alloys, hardened, 100 HB	
N2.1.1 Aluminium casting alloys, non-hardened, ≤ 12 % Si, 75 HB	
N2.1.2 Aluminium casting alloys, hardened, ≤ 12 % Si, 90 HB	
N2.1.3 Aluminium casting alloys, non-hardened, > 12 % Si, 130 HB	
N3.1.1 Copper and copper alloys: Free-machining alloy, Pb > 1 %	
N3.1.2 Copper and copper alloys: CuZn, CuSnZn	
N3.1.3 Copper and copper alloys: CuSn, lead-free copper and copper electrolyte	
N4.1.1 Non-metallic materials: Duroplastics, fibre-reinforced plastics	
N4.1.2 Non-metallic materials: Hard rubber, wood, etc.	
N4.1.3 Non-metallic materials: Graphite	
S1.1.1 Heat-resistant alloys, Fe-based, annealed, 200 HB	
S1.1.2 Heat-resistant alloys, Fe-based, hardened, 280 HB	
S1.1.3 Heat-resistant alloys, Ni- or Co-based, annealed, 250 HB	
S1.1.4 Heat-resistant alloys, Ni- or Co-based, hardened, 350 HB	
S1.1.5 Heat-resistant alloys, Ni- or Co-based, cast, 320 HB	
S2.1.1 Titanium alloys, pure titanium, Rm 400 N/mm ²	3
S2.1.2 Titanium alloys, Alpha and Beta alloys, hardened, Rm 1050 N/mm ²	3
H1.1.1 Hardened steel, hardened and tempered, < 55 HRC	
H1.1.2 Hardened steel, hardened and tempered, < 60 HRC	
H1.1.3 Hardened steel, hardened and tempered, > 60 HRC	
H2.1.1 Chilled cast iron, 400 HB	
H2.1.2 Chilled cast iron, hardened and tempered, < 55 HRC	

ISO-code

P	Steel, high-alloy steel
M	Stainless steel
K	Grey cast, spheroidal graphite iron and malleable cast iron
N	Aluminium and other non-ferrous metals
S	Special, super and titanium alloys
H	Hardened steel and chilled cast iron
O	Fibre-reinforced plastics (FRP), graphite

Tool recommendations regarding the suitability for application groups or specifications of max. tensile strength and hardness can be found on the product and cutting value pages.

- Ideally suitable
- Suitable under certain conditions

Pictograms

Cutting material	VHM Solid carbide		HSS-E High-speed steel			
Machining depth	3xD	6xD	5xD	7xD	10xD	15xD
Tolerance on Ø	m7	h7	6HX			
Shank form	 to DIN 6535		 cylindrical			
Standard	 to DIN		 According to Gühring standards			
Type		VA	VA R45			
Internal cooling	 with internal coolant		 without internal coolant			
Cutting direction	 Right-hand					
Web thinning						
Hole type	 Through-hole		 Blind hole		 Through-, blind holes	
Form	B	C				
Cutting edge form	 135°		 140°			

Surfaces



INOX



186 075/24037-VII-23 | Printed in Germany | 2024

GÜHRING

Gühring KG | P.O. Box 100247 | 72423 Albstadt | Germany
Gühring KG | Herderstrasse 50-54 | 72458 Albstadt | Germany
Telephone: +49 74 31 17-0 | info@guehring.de | www.guehring.com

No liability can be accepted for printing errors or technical changes of any kind.
Our Conditions of Sale and Terms of Payment apply. Available on request.