

BBLV Insulators (Stand-Off)

600Volts Rated - Compression Moulded - Glass Reinforced Polyester Material

High Dielectric Strength
Arc Quenching and Non Tracking
Non Flammable

Wear and Corrosion Resistant
Chemical and Oil Resistant
High Mechanical Strength

Dimensional Stability
Moulded in Brass Inserts
Metric Thread Sizes



Tensile Strength (LBS)	500
Voltage withstand (KV)	8.5
Torque Strength (N.m)	10

PROUDLY DISTRIBUTED BY

GVKinsman PTY LTD
ELECTRICAL DISTRIBUTOR

Fax 03 9312 6433


Web www.gvk.com.au

Phone 1300 LV MV HV (58 68 48)

Email sales@gvk.com.au


660 Somerville Rd, Sunshine West, Vic 3020

BBLV30H & BBLV30H6

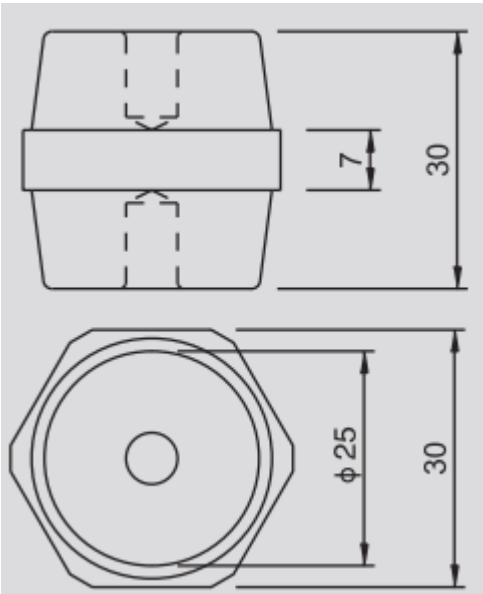


Tensile Strength (LBS)	600	
Voltage withstand (KV)	11	
Torque Strength (N.m)	15	20
Screw (mm)	6	8
Screw Depth	10	

BBLV35D & BBLV35D10

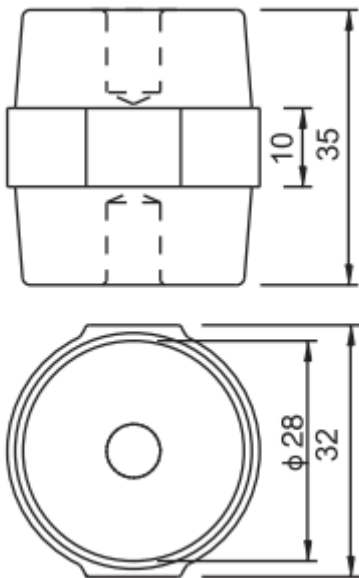


Tensile Strength (LBS)	600	
Voltage withstand (KV)	10	
Torque Strength (N.m)	25	25
Screw (mm)	8	10
Screw Depth	9	11

BBLV35E

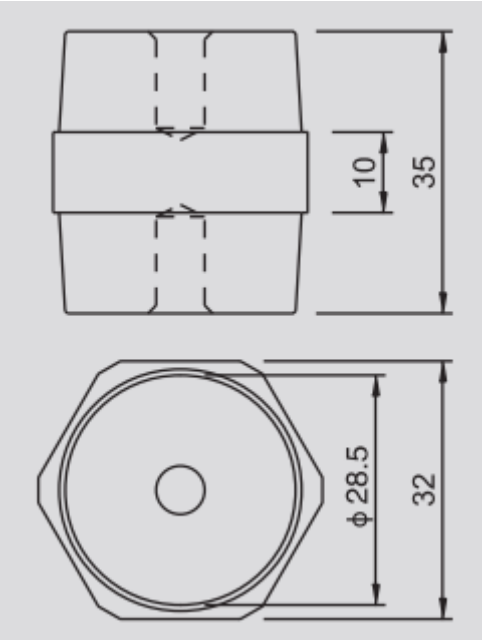


Tensile Strength (LBS)	650
Voltage withstand (KV)	12.5
Torque Strength (N.m)	25
Screw (mm)	8
Screw Depth	12

BBLV40H & BBLV40H8

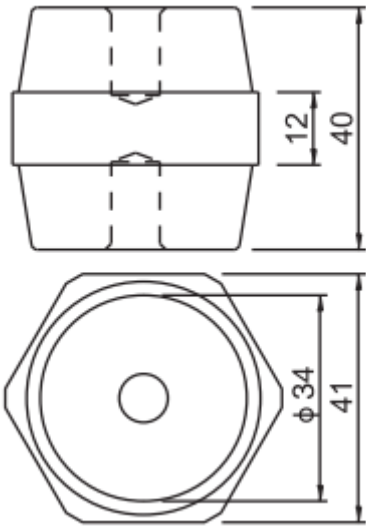


Tensile Strength (LBS)	800	
Voltage withstand (KV)	14	
Torque Strength (N.m)	25	50
Screw (mm)	8	10
Screw Depth	12	

BBLV50E & BBLV50E10

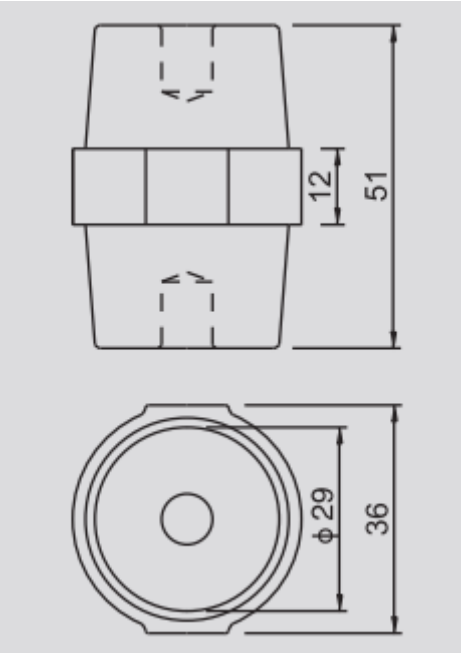


Tensile Strength (LBS)	1000	
Voltage withstand (KV)	15	
Torque Strength (N.m)	30	35
Screw (mm)	8	10
Screw Depth	12	11

BBLV50H & BBLV50H12

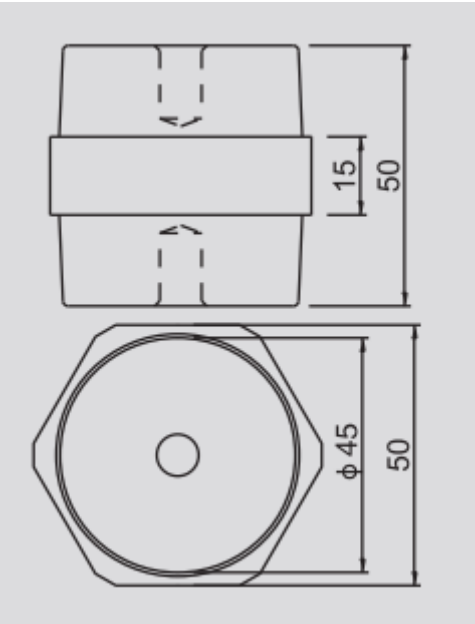


Tensile Strength (LBS)	1500	
Voltage withstand (KV)	15.5	
Torque Strength (N.m)	50	85
Screw (mm)	10	12
Screw Depth	15	15

BBLV60H

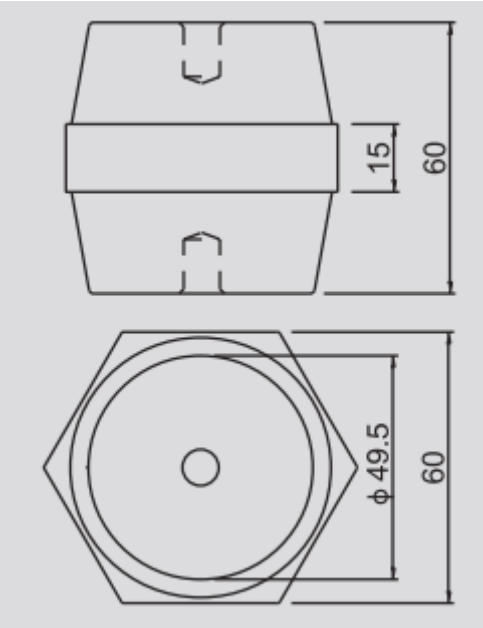

Tensile Strength (LBS)	2000
Voltage withstand (KV)	21
Torque Strength (N.m)	85
Screw (mm)	12
Screw Depth	20

BBLV60L

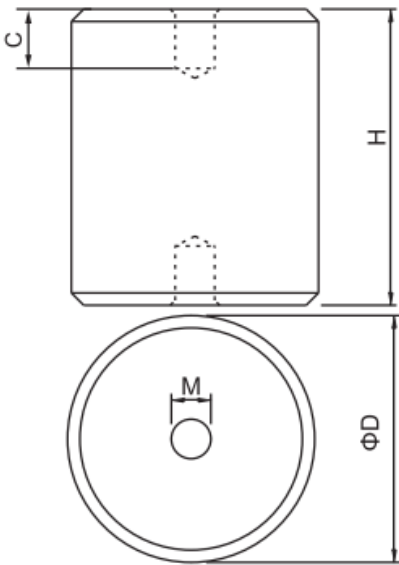


Dimensions

D=60
H=60
M=10
C=15

Torque Strength (N.m)

60

BBLV60S

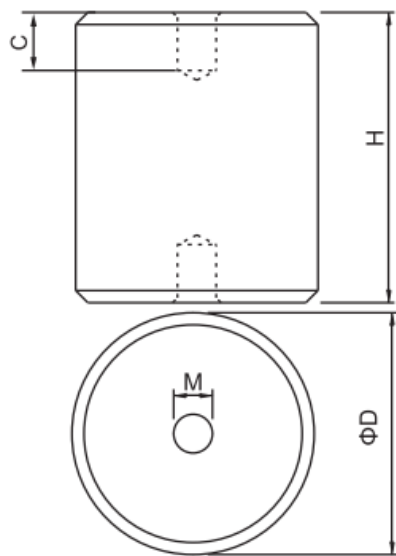


Dimensions

D=30
H=60
M=10
C=15

Torque Strength (N.m)


60

BBLV75D, BBLV75D12 & BBLV75D8

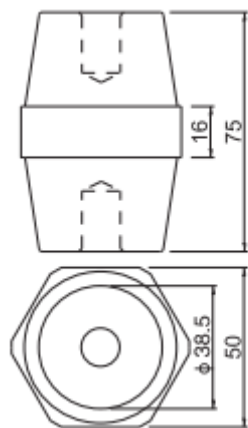

Tensile Strength (LBS)	1500		
Voltage withstand (KV)	28		
Torque Strength (N.m)	50	85	
Screw (mm)	8	10	12
Screw Depth	15	20	20

BBLV76E

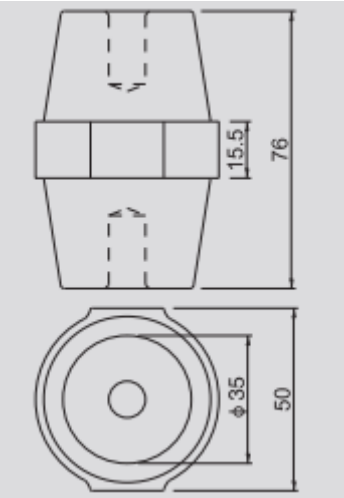

Tensile Strength (LBS)	1500
Voltage withstand (KV)	25
Torque Strength (N.m)	50
Screw (mm)	10
Screw Depth	18