

COPPER-BONDED GROUND ROD, POINTED, 3/4" DIA, 10' (3M), 10 MIL, 12.6 LB (5.72 KG)

CATALOG NUMBER

LGR1918E



PROUDLY DISTRIBUTED BY



Web	www.gvk.com.au
Email	sales@gvk.com.au
Phone	03 9312 6633
Fax	03 9312 6433

CERTIFICATIONS



FEATURES

99.9% pure electrolytic copper coating

Rods have a high carbon steel core and tip that provide superior strength when driving

Copper coating will not crack when bent or tear when driven

Minimum copper coating of 10 mils on rods listed to UL® 467

nVent ERICO name, length, diameter and part number is roll-stamped within 12" (304,8 mm) of chamfered end

UL logo and control number where applicable stamped on each rod for easy inspection after installation

PRODUCT ATTRIBUTES

Material: Copper-Bonded Steel

Tensile Strength: 552 MPa Min

Ground Rod Diameter, Nominal: 3/4"

Ground Rod Diameter, Actual: 17.3 mm

Length: 3 m

Plating Thickness: 254 µm

Unit Weight: 5.720 kg

UPC Label: No

Complies With: IEC® EN 62561-2;ANSI®/NEMA® GR1


ADDITIONAL PRODUCT DETAILS

For rods to be listed to UL® 467, they must be at least 8' (2.44 m) in length.

IEC® EN 62561-2 supercedes EN 50164-2.

Additional lengths available.

DIAGRAMS

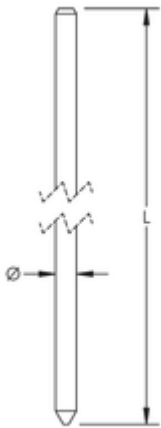

PROUDLY DISTRIBUTED BY



Web	www.gvk.com.au
Email	sales@gvk.com.au
Phone	03 9312 6633
Fax	03 9312 6433

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

⚠ WARNING: This product can expose you to chemicals including nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm.- For more information go to-www.P65Warnings.ca.gov.

PROUDLY DISTRIBUTED BY



PTY
LTD

Web	www.gvk.com.au
Email	sales@gvk.com.au
Phone	03 9312 6633
Fax	03 9312 6433



TRACER

Our powerful portfolio of brands:
CADDY ERICO HOFFMAN RAYCHEM SCHROFF

COPPER-BONDED GROUND ROD, POINTED, 3/4" DIA, 8' (2.4M), 10 MIL, 10.1 LB (4.56KG)

CATALOG NUMBER

LGR1924



PROUDLY DISTRIBUTED BY



Web	www.gvk.com.au
Email	sales@gvk.com.au
Phone	03 9312 6633
Fax	03 9312 6433

CERTIFICATIONS



FEATURES

99.9% pure electrolytic copper coating

Rods have a high carbon steel core and tip that provide superior strength when driving

Copper coating will not crack when bent or tear when driven

Minimum copper coating of 10 mils on rods listed to UL® 467

nVent ERICO name, length, diameter and part number is roll-stamped within 12" (304,8 mm) of chamfered end

UL logo and control number where applicable stamped on each rod for easy inspection after installation

PRODUCT ATTRIBUTES

Material: Copper-Bonded Steel

Tensile Strength: 552 MPa Min

Ground Rod Diameter, Nominal: 3/4"

Ground Rod Diameter, Actual: 17.3 mm

Length: 2.400 m

Plating Thickness: 254 µm

Unit Weight: 4.560 kg

UPC Label: No

Complies With: IEC® EN 62561-2;ANSI®/NEMA® GR1


ADDITIONAL PRODUCT DETAILS

For rods to be listed to UL® 467, they must be at least 8' (2.44 m) in length.

IEC® EN 62561-2 supercedes EN 50164-2.

Additional lengths available.

DIAGRAMS

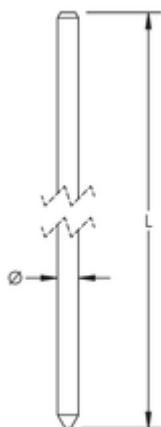

PROUDLY DISTRIBUTED BY



Web	www.gvk.com.au
Email	sales@gvk.com.au
Phone	03 9312 6633
Fax	03 9312 6433

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

⚠ WARNING: This product can expose you to chemicals including nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm.- For more information go to-www.P65Warnings.ca.gov.

PROUDLY DISTRIBUTED BY



PTY
LTD

Web	www.gvk.com.au
Email	sales@gvk.com.au
Phone	03 9312 6633
Fax	03 9312 6433



TRACER

Our powerful portfolio of brands:
CADDY ERICO HOFFMAN RAYCHEM SCHROFF

COPPER-BONDED GROUND ROD, POINTED, 3/4" DIA, 10' (3M), 10 MIL, 12.6 LB (5.72 KG)

CATALOG NUMBER

LGR1930



PROUDLY DISTRIBUTED BY



Web	www.gvk.com.au
Email	sales@gvk.com.au
Phone	03 9312 6633
Fax	03 9312 6433

CERTIFICATIONS



FEATURES

99.9% pure electrolytic copper coating

Rods have a high carbon steel core and tip that provide superior strength when driving

Copper coating will not crack when bent or tear when driven

Minimum copper coating of 10 mils on rods listed to UL® 467

nVent ERICO name, length, diameter and part number is roll-stamped within 12" (304,8 mm) of chamfered end

UL logo and control number where applicable stamped on each rod for easy inspection after installation

PRODUCT ATTRIBUTES

Material: Copper-Bonded Steel

Tensile Strength: 552 MPa Min

Ground Rod Diameter, Nominal: 3/4"

Ground Rod Diameter, Actual: 17.3 mm

Length: 3 m

Plating Thickness: 254 µm

Unit Weight: 5.720 kg

UPC Label: No

Complies With: IEC® EN 62561-2;ANSI®/NEMA® GR1


ADDITIONAL PRODUCT DETAILS

For rods to be listed to UL® 467, they must be at least 8' (2.44 m) in length.

IEC® EN 62561-2 supercedes EN 50164-2.

Additional lengths available.

DIAGRAMS

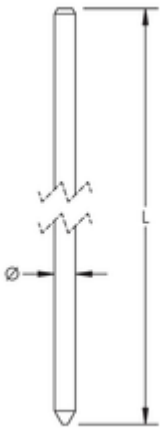

PROUDLY DISTRIBUTED BY



Web	www.gvk.com.au
Email	sales@gvk.com.au
Phone	03 9312 6633
Fax	03 9312 6433

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

⚠ WARNING: This product can expose you to chemicals including nickel, which is known to the State of California to cause cancer and birth defects or other reproductive harm.- For more information go to-www.P65Warnings.ca.gov.

PROUDLY DISTRIBUTED BY



PTY
LTD

Web	www.gvk.com.au
Email	sales@gvk.com.au
Phone	03 9312 6633
Fax	03 9312 6433



TRACER

Our powerful portfolio of brands:
CADDY ERICO HOFFMAN RAYCHEM SCHROFF