

# TCLK




## TINNED COPPER LINKS

Manufactured to the accepted Australian dimensions from 99.9% Oxygen free copper with electro tinned finish.

### Tested to the following Standards:

IEC 61238-1:2003.  
AS/NZS 4325.1:1995  
Available on request

TCLK Tinned Copper Links

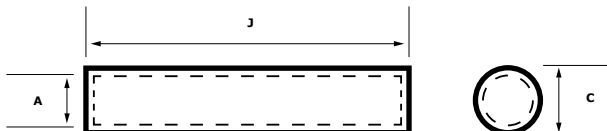

TCLK Tinned Copper Links

DIMENSION IN MM (TOLERANCE:  $\pm 3\%$ )

PART NO.	MM2	A	C	J	PER PVC BAG
TCLK1.5	1.5	1.8	3.7	22.2	100
TCLK2.5	2.5	2.5	4.4	22.2	100
TCLK4	4	3.3	5.2	22.2	100
TCLK6	6	3.7	5.5	22.2	100
TCLK10	10	4.7	7.1	22.2	100
TCLK16	16	5.5	7.9	44.4	100
TCLK25	25	7.1	9.5	47.6	100
TCLK35	35	8.4	11.5	47.6	50
TCLK50	50	9.5	12.8	47.6	50
TCLK70	70	11.0	14.4	50.8	25
TCLK95	95	13.4	17.4	54.0	25
TCLK120	120	15.5	20.6	65.1	20
TCLK150	150	16.3	22.2	65.1	LOOSE
TCLK185	185	18.4	24.2	65.1	LOOSE
TCLK240	240	21.2	28.5	88.9	LOOSE
TCLK300	300	23.8	31.9	88.9	LOOSE
TCLK400	400	26.8	34.9	88.9	LOOSE
TCLK500	500	30.0	38.1	114.3	LOOSE
TCLK630	630	33.5	45.0	114.3	LOOSE

Get in touch with our sales team for a quote on your next project

Phone 03 9312 6633