

## NOTES:

Also suitable for baths with an integrated overflow.  
Fixing screw must be stainless steel, M5 countersunk head. Replace with different length of screw for different bath wall thickness. Refer table below:

## Screw Pack Included

Now includes a screw kit designed to accommodate bath thicknesses greater than 12mm.






BATH WALL THICKNESS	S/S SCREW C/SUNK HD
2 ~ 12 mm	M5 x 20
12 ~ 22 mm	M5 x 30
22 ~ 32 mm	M5 x 40
32 ~ 42 mm	M5 x 50
42 ~ 52 mm	M5 x 60
52 ~ 62 mm	M5 x 70

# BATH BEND POP DOWN<sup>®</sup> WITH CONNECTOR

## PLUG & WASTES

- ✓ Flexible connector 600mm in length
- ✓ Removable cartridge for drain access and cleaning
- ✓ Easy installation due to top fix design
- ✓ Adjustable depth for bath thickness up to 12mm
- ✓ Premium solution for free standing baths
- ✓ Ideal for limited space (77mm height)
- ✓ World Wide Patents Granted or Pending

CODE	OUTLET SIZE	FINISH	CTN QTY
21831.01	40mm	Chrome	10

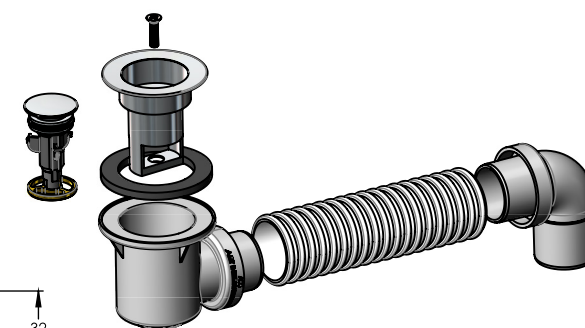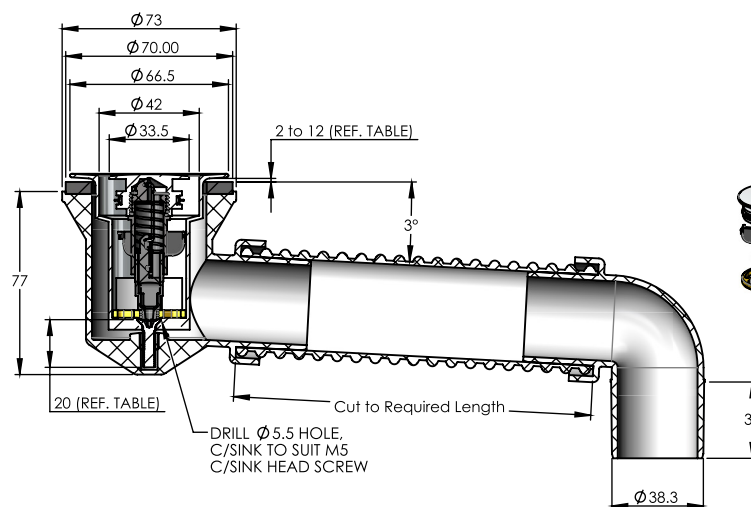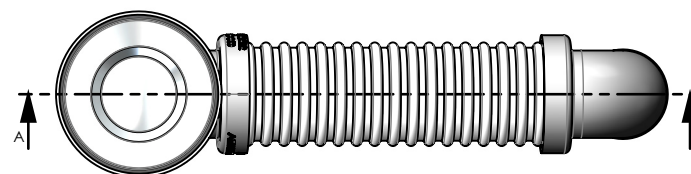

## Available Finishes



**Note:** .04 Polished Brass (Raw/Living Finish)