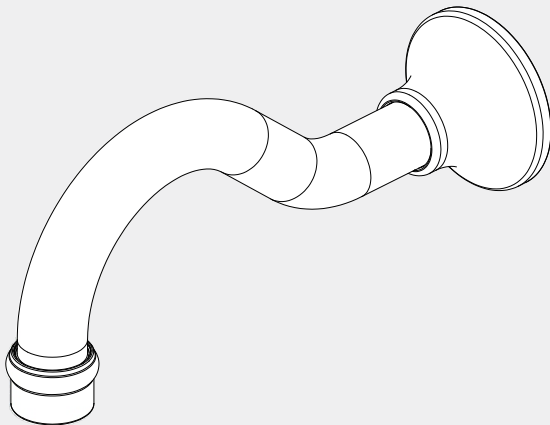


York Bath Spout Only

Nero

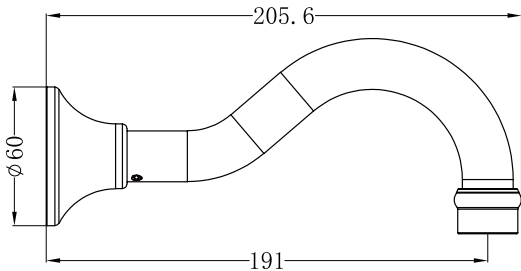


Lead Free



Versions:202506

Drawing



Specifications

Watermark License
WM-060073


Temperature Rating
Min 1°C-Max 75°C


Pressure Rating
Min 150kpa - Max 500kpa


Packaging Includes


1x Spout
1x Installation Kit

Finish & SKU

 **Chrome**
NR692103CH

 **Matte Black**
NR692103MB

 **Aged Brass**
NR692103AB

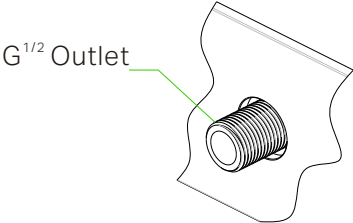
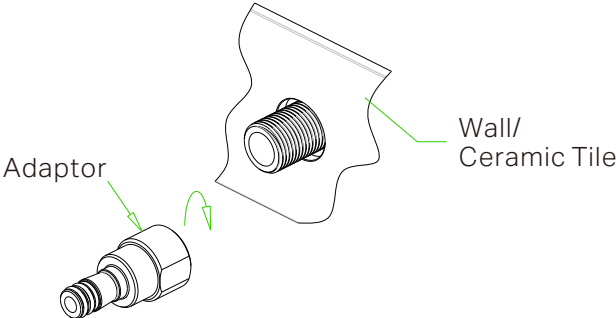
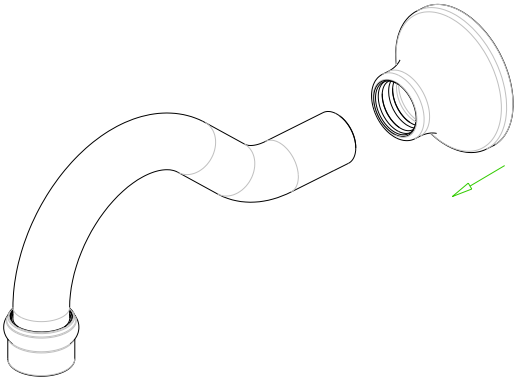
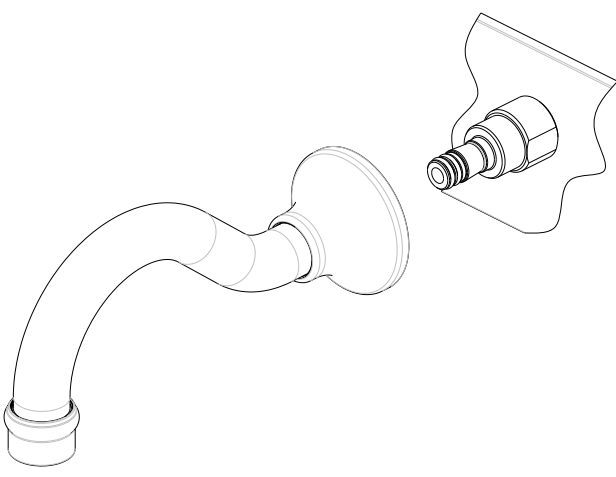
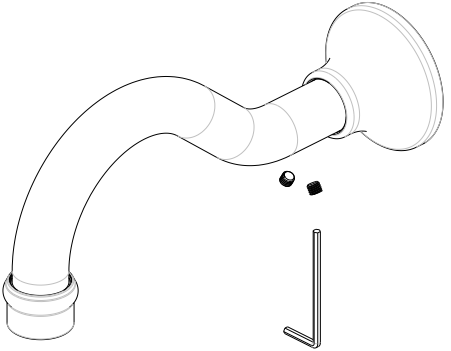
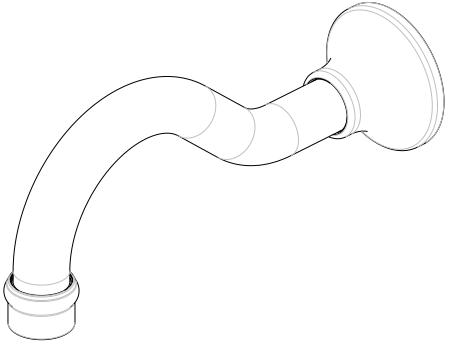
 **Brushed Nickel**
NR692103BN

*Dimensions are nominal measurements only.

Installation Instruction

GENERAL INSTRUCTIONS:

- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

| | | |
|--|---|---|
| <div>1</div> <div></div> <div>1. Apply thread sealant or teflon tape on outlet thread.</div> | <div>2</div> <div></div> <div>2. Screw adaptor on to outlet. Make sure the face of inlet is flush with wall/ceramic tile face.</div> | <div></div> <div>3. Pull back plate on together with spout.</div> |
| <div></div> <div>4. Pull spout onto adaptor.</div> | <div></div> <div>5. Tighten grub screw into spout by wrench and cover by silicone cap.</div> | <div></div> <div>6. Finish.</div> |

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.

Nero

