
Bianca Shower Mixer With Divertor Separate Back Plate Trim Kits Only






Lead Free

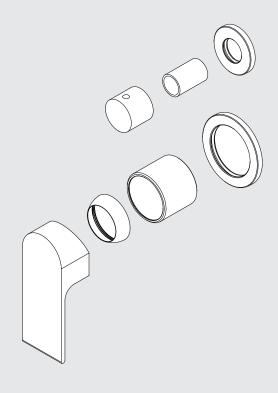

Versions:202506

Drawing



Specifications

Watermark License

WM-060073

Temperature Rating

Min 1°C-Max 75°C

Pressure Rating

Min 150kpa - Max 500kpa

Packaging Includes

- 2x Plates
- 1x Handle
- 1x Divertor Knob
- 1x Divertor Sleeve
- 1x Cartridge Bell
- 1x Dressing Ring 1x Installation Kits

Finish & SKU

Chrome

NR321511gtCH Matte Black NR321511gtMB Gun Metal NR321511gtGM

Brushed Gold NR321511gtBG

Brushed Nickel NR321511gtBN


Brushed Bronze NR321511gtBZ

^{*}Dimensions are nominal measurements only.

Installation Instruction

GENERAL INSTRUCTIONS:

- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

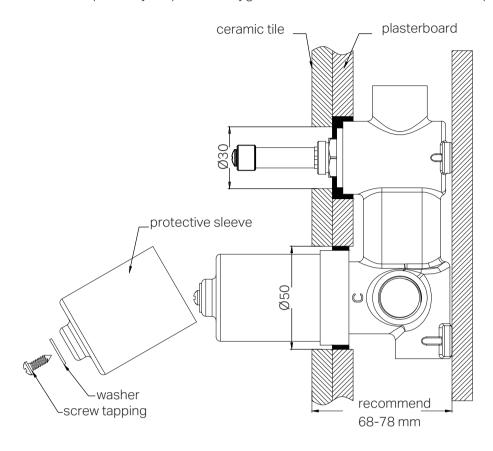

- do waterproof treatment

 O ring

 cartridge bell

 recommend
 68-78 mm
- 1. Drill a Ø50mm and a Ø30mm hole in the ceramic tile, then position it as shown in the above diagram.
- $2.\, Undo \, the \, self-tapping \, screw \, to \, remove \, the \, protective \, sleeve \, .$
 - grub screw divertor knob

 Allen key handle washer plate grub screw cap
- 3. Insert the O ring to the cartridge bell groove, and slide the cartridge bell onto cartridge and slide divertor sleeve onto divertor cartridge.
- ${\tt 4.\,Apply\,waterproof\,treatment\,to\,the\,area\,indicated\,in\,the\,diagram\,above}.$
- 5. Thread the dressing ring on the cartridge bell.
- 6. Slide the backplates onto body.
- 7. Attach the washer to cartridge rod, position the handle, tighten it with a grub screw using an Allen key, and cap the grub screw hole.
- 8. Attach the divertor knob to divertor cartridge, tighten it with grub screw using Allen key, and cap the grub screw hole.

MAINTENANCE AND CARE:

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

FINAL INSPECTION:

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.



