




HIGH PRESSURE WASHER

For Electric Start Direct Drive/Gear Reduction Gas/Diesel Pressure Washer

OPERATOR'S MANUAL

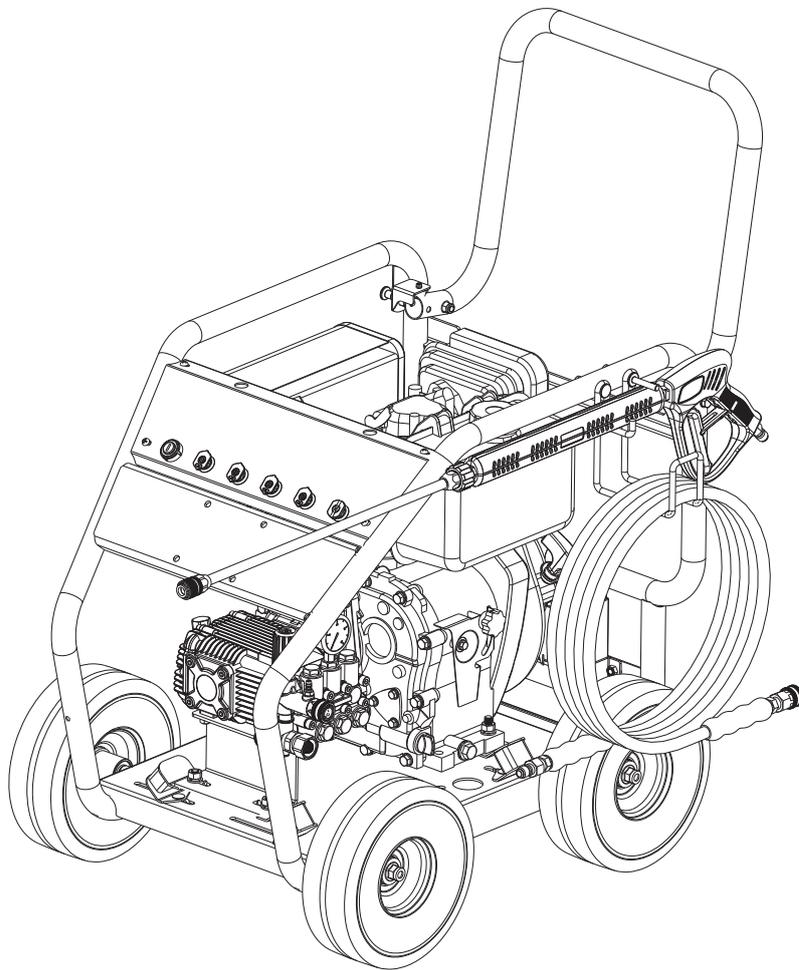

Part No: TM543-4000

Ver: 1.0



TO PREVENT SERIOUS INJURY OR DAMAGE TO YOUR PRESSURE WASHER,
READ AND UNDERSTAND ALL WARNINGS AND INSTRUCTIONS BEFORE USE



Contents

1. Introduction	1
2. Products Identification	2
3. Safety Guidelines	2,3,4,5
4. Products Specifications	6
5. Parts Identification and Features	7,8,9
6. Unpacking & Assembly	10
7. Setting Up the Before Use	10, 11, 12
8. Setting Up the Before Use (Diesel Engine)	13
9. Safe Working Environment	14
10. Startup and Stopping Procedure (Gas Engine)	15
11. Startup and Stopping Procedure (Diesel Engine)	16
12. Pump Self-Priming Setup (If applicable)	16
13. Using Nozzles	17
14. Adjusting Spray Pressure	18
15. Using Chemicals & Detergents	18
16. Maintenance	19,20
17. Storage	20,21
18. Troubleshooting	22,23
19. Pressure Washer Exploded View & Parts List	24
20. Triplex Pump Exploded View & Parts List	25
21. Gearbox Exploded View & Parts List	26

Disclaimer:

The information in this document is to the best of our knowledge true and accurate, but all recommendations or suggestions are made without guarantee. Since the conditions of use are beyond their control, the factory disclaim any liability for loss or damage suffered from the use of this data or suggestions. Furthermore, no liability is accepted if use of any product in accordance with this data or suggestions infringes any patent. The factory reserve the right to change product specifications and warranty statements without further notification. All images are for illustration purposes only.

1. Introduction

Thank you for purchasing this **Professional Power Equipment Product**.

Please read the following instructions carefully to help to ensure your personal safety and the correct assembly, use and maintenance of this equipment. Please ensure that you have read and understand the information contained in the manual before attempting to use the equipment. This equipment should only be used by trained and fully competent individuals, in a safe working environment. Please ensure that the appropriate safety equipment is worn at all times and that the product is not adapted or modified in anyway.

Please note that the contents of this instruction manual are based on the latest product information available at the time of publication and that the manufacturer reserves the right to make changes at any time without notice.

2. Products Identification

RECORD IDENTIFICATION NUMBERS

If you need to contact an Authorized Dealer for information on servicing, always provide the product model and identification numbers. You will need to locate the model, revision and serial number for the machine and record the information in the places provided below. You will also need the model and serial number for the engine on your machine.

1. Date of Purchase: _____
2. Dealer Name: _____
3. Dealer Phone: _____
4. Unit Model Name: _____
6. Pump Model & Serial Number: _____
5. Engine Model & Serial Number: _____

NOTE: Check the article 5.1 (page 7) for the location of the pump model & serial no. on the pump. Check the engine operators manual for the location of these numbers.

3. Safety Guidelines



WARNING- READ AND FOLLOW ALL INSTRUCTIONS

- Failure to follow all instructions in this manual may result in severe personal injury or death. Keep this manual and refer to it for Safety Instructions, Operating Procedures, and Warranty.



This manual contains information that is important for you to know and understand. This information relates to protecting **YOUR SAFETY** and **PREVENTING EQUIPMENT PROBLEMS**. To help you recognize this information, we use the symbols below. Please read the manual and pay attention to these sections.



DANGER

DANGER indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.



CAUTION

CAUTION indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.



WARNING

WARNING indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.



CAUTION

CAUTION used without the safety alert symbol indicates a potentially hazardous situation which, if not avoided, may result in property damage.

Improper maintenance and operation are responsible for the majority of accidents involving gas pressure washers. The largest portion of these could be prevented by recognizing the basic safety rules and precautions. Most accidents can be avoided if the operator recognizes a potentially hazardous situation before it happens and by observing appropriate safety rules and procedures as outlined in this manual. Basic safety precautions are outlined in the **SAFETY** portion of this manual and throughout the text in this manual where a potential hazard might occur. Hazards that **MUST** be avoided to prevent serious injury follow headers marked **DANGER** or **WARNING**. These same precautions are placed as labels on the tool itself. **NEVER** use this pressure washer for applications that are **NOT** specified in this manual.

3. Safety Guidelines (continued)



DANGER-- RISK TO BREATHING

- **Running engine gives off carbon monoxide, an odorless, colorless, poison gas.**
- **Breathing carbon monoxide can cause nausea, fainting or death.**
- **Some chemicals or detergents may be harmful if inhaled or ingested, causing severe nausea, fainting or poisoning.**



- **ALWAYS** Operate pressure washer in a well ventilated area. Avoid enclosed areas such as garages, basements ,etc.
- **ALWAYS** Keep exhaust gas from entering a confined area through windows, doors, ventilation intakes, or other openings.
- **ALWAYS** follow manufacturers recommendations, use a respirator or mask whenever there is a chance that vapors may be inhaled.
- **ALWAYS** use the only fluids specifically recommended for high pressure washers.
- **NEVER** operate unit in a location occupied by humans or animals.
- **NEVER** use chlorine bleach or any other corrosive compound.



DANGER--RISK OF EXPLOSION OR FIRE

- **Fuel and its vapors are extremely flammable and explosive.**
- **Fire or explosion can cause severe burns or death.**



ALWAYS shut off engine and allow it to cool a least 2minutes before adding fuel to the tank.

ALWAYS use care in filling tank to avoid spilling fuel. Move pressure washer away from fueling area before starting engine.

ALWAYS Keep maximum fuel level below top of tank to allow for expansion.

ALWAYS operate and fuel equipment in well ventilated areas free from obstructions. Equip areas with fire extinguishers suitable for gasoline fires.

ALWAYS keep pressure washer a minimum of four feet away from surfaces (such as houses, automobiles, or live plants) that could be damaged from muffler exhaust heat.

ALWAYS Store fuel in an OSHA approved container, in a secure location away from work area.

NEVER spray flammable liquids

NEVER operate pressure washer in an area containing dry brush or weeds.



WARNING--RISK OF FALL HAZARD

- **Use of pressure washer can create puddles and slippery surfaces.**
- **Kickback from spray gun can cause you to fall.**




- Keep the area of operation clear of all persons, particularly small children, pets and obstacles.
- Do not operate the product when fatigued or under the influence of alcohol or drugs. Stay alert at all times.
- If engine does not start after two pulls, squeeze trigger of gun to relieve pump pressure. Pull starter cord slowly until resistance is felt. Then pull cord rapidly to avoid kickback and prevent hand or arm injury.
- Do not overreach or stand on an unstable support.
- The cleaning area should have adequate slopes and drainage to reduce the possibility of a fall due to slippery surfaces.
- Be extremely careful if you must use the pressure washer from a ladder, scaffolding, or any other similar location.
- Beware of kick-back force and the sudden torque on the spray gun assembly when operating the trigger. Firmly grasp spray gun with both hands to avoid injury when spray gun kicks back.

3. Safety Guidelines (continued)




WARNING--RISK TO FLUID INJECTION

- The high pressure stream of water that this equipment produces can cut through skin and its underlying tissues, leading to serious injury and possible amputation. Spray gun traps high water pressure, even when engine is stopped and water is disconnected, which can cause injury.

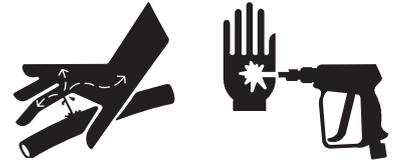

- **ALWAYS** point spray gun in safe direction and squeeze trigger, to release high pressure, every time you stop engine.
- **NEVER** place hands in front of nozzle.
- **MAKE SURE** hose and fittings are tightened and in good condition. Never hold onto the hose or fittings during operation.
- **DO NOT** allow hose to contact muffler.
- **NEVER** attach or remove wand or hose fittings while system is pressurized.
- **NEVER** use a spray gun which does not have a trigger lock or trigger guard in place and in working order.
- **ONLY USE** hose and high pressure accessories rated for pressure higher than your pressure washer's p.s.i.
To relieve system pressure, shut off engine, turn off water supply, and pull gun trigger until water stops flowing.
- **DO NOT** allow **CHILDREN** to operate pressure washer.
- **NEVER** repair leaking connections with sealant of any kind. Replace o-ring or seal.
- **NEVER** connect high pressure hose to nozzle extension.
- **DO NOT** secure spray gun in open position.
- **DO NOT** leave spray gun unattended while machine is running.
- **ALWAYS** be certain spray gun, nozzles and accessories are correctly attached.
- **NEVER** aim spray gun at people, animals, or any electrical device and the machine itself.



DANGER-- RISK OF CHEMICAL BURN

- Use of acids, toxic or corrosive chemicals, poisons, insecticides, or any kind of flammable solvent with this product could result in serious injury or death.



- **DO NOT** use acids, gasoline, kerosene, or any other flammable materials in this product. Use only household detergents, cleaners and degreasers recommended for use in pressure washers.
- Wear protective clothing to protect eyes and skin from contact with sprayed materials.
- **DO NOT** use chlorine bleach or any other corrosive compound



WARNING--RISK OF ELECTRICAL SHOCK

- Risk of electrocution.
- Contact with power source can cause electric shock or burn.



- Unplug any electrically operated product before attempting to clean it.
- Direct spray away from electric outlets and switches.
- **NEVER** spray near power source.
- **DO NOT** touch the plug with wet hands.
- **WHEN SERVICING THE PRESSURE WASHER:** Disconnect the spark plug wire and place it where it cannot contact the plug. **DO NOT** check for spark with the plug removed. Use only approved spark plug testers.

3. Safety Guidelines (continued)



DANGER-- RISK OF HOT SURFACES

- Contact with hot surfaces, such as engines exhaust components, could result in serious burn.



- During operation, touch only the control surfaces of the pressure washer.
- Keep children away from the pressure washer at all times. They may not be able to recognize the hazards of this product.
- **DO NOT** let hoses come in contact with very hot engine muffler during or immediately after use of your pressure washer.
- **AVOID** hot exhaust gases.



DANGER-- RISK OF MOVING PARTS

- Starter and other rotating parts can entangle hands, hair, clothing, or accessories.




- **NEVER** operate pressure washer without protective housing or covers.
- **DO NOT** wear loose clothing, jewelry or anything that may be caught in the starter or other rotating parts.
- Tie up long hair and remove jewelry.



DANGER-- RISK OF EYE INJURY

- Spray can splash back or propel objects.



- **ALWAYS** wear safety goggles when using this equipment or in vicinity of where equipment is in use.
- Before starting the pressure washer, be sure you are wearing adequate safety goggles.
- **NEVER** substitute safety glasses for safety goggles.



CAUTION– IMPROPER TREATMENT OF PRESSURE WASHER CAN DAMAGE IT AND SHORTEN ITS LIFE AND VOID YOUR WARRANTY

- **NEVER** pull water supply hose to move pressure washer. This could damage hose and/or pump inlet.
- **DO NOT** use hot water, use cold water only.
- **NEVER** turn water supply off while pressure washer engine is running or damage to pump will result.
- **DO NOT** stop spraying water for more than two minutes at a time. Pump operates in bypass mode when spray gun trigger is not pressed. If pump is left in bypass mode for more than two minutes internal components of the pump can be damaged.
- Before starting pressure washer in cold weather, check all parts of the equipment to be sure ice has not formed there.
- **DO NOT** use the pressure washer if excessive noise or vibration is present. Have it repaired immediately.

PLEASE WEAR PROPER APPAREL AND PROTECTORS



Proper Apparel



Electrically
Non-conductive Gloves



Ear Protection





Nonskid Footwear

4. Products Specifications


Model		TM543-4000
Max Pressure		4000psi / 275bar
Max Flow		25L/min
Pump Model		DBF-1821G2, Gearbox
Power And Type		22hp/620cc. OHV
Start Type		Electric Start
Battery		Battery 12V/36Ah
Gun And Lance		Stainless steel trigger gun
High Pressure Hose		Hydraulic high pressure hose
Nozzle		Standard thread nozzle at 25°
Wheel		4 x 13" Pneumatic wheel
Shipping Size		95x80x94cm
Shipping Weight		145kgs

5. Parts Identification and Features

5.1 Triplex Pump

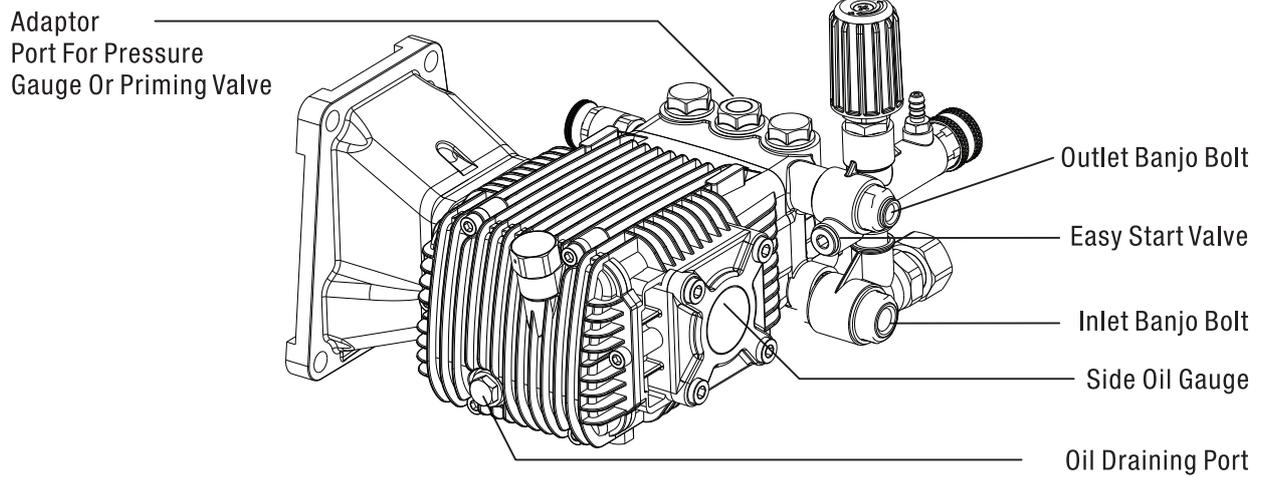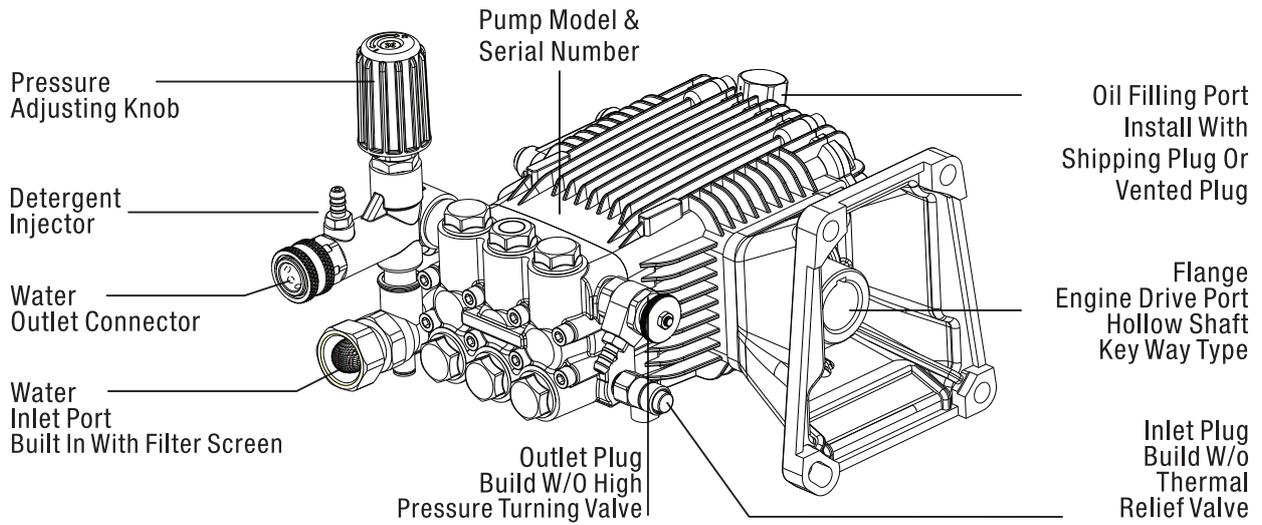


5.2 Gear-reduction Box

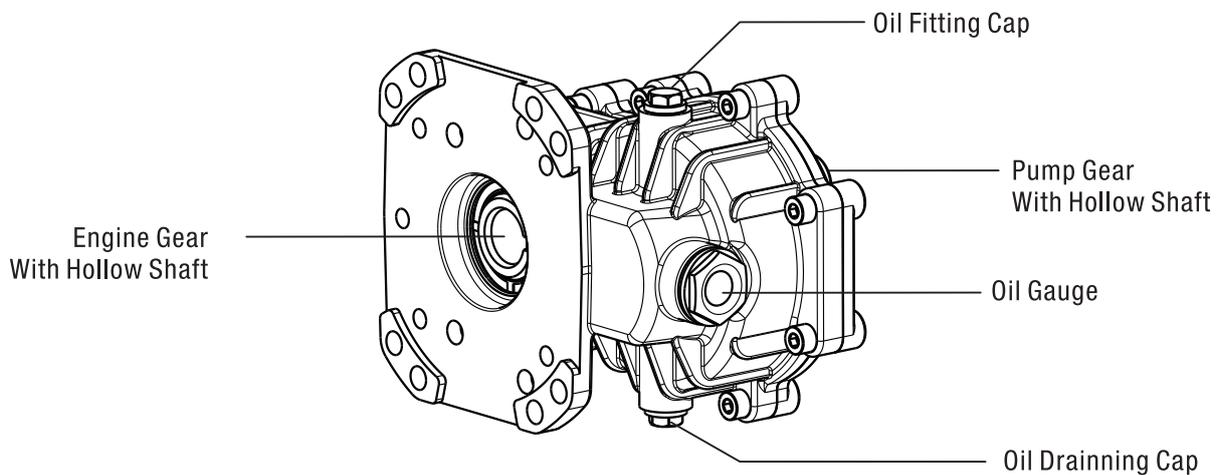


5. Parts Identification and Features (Continued)

5.3 Engine

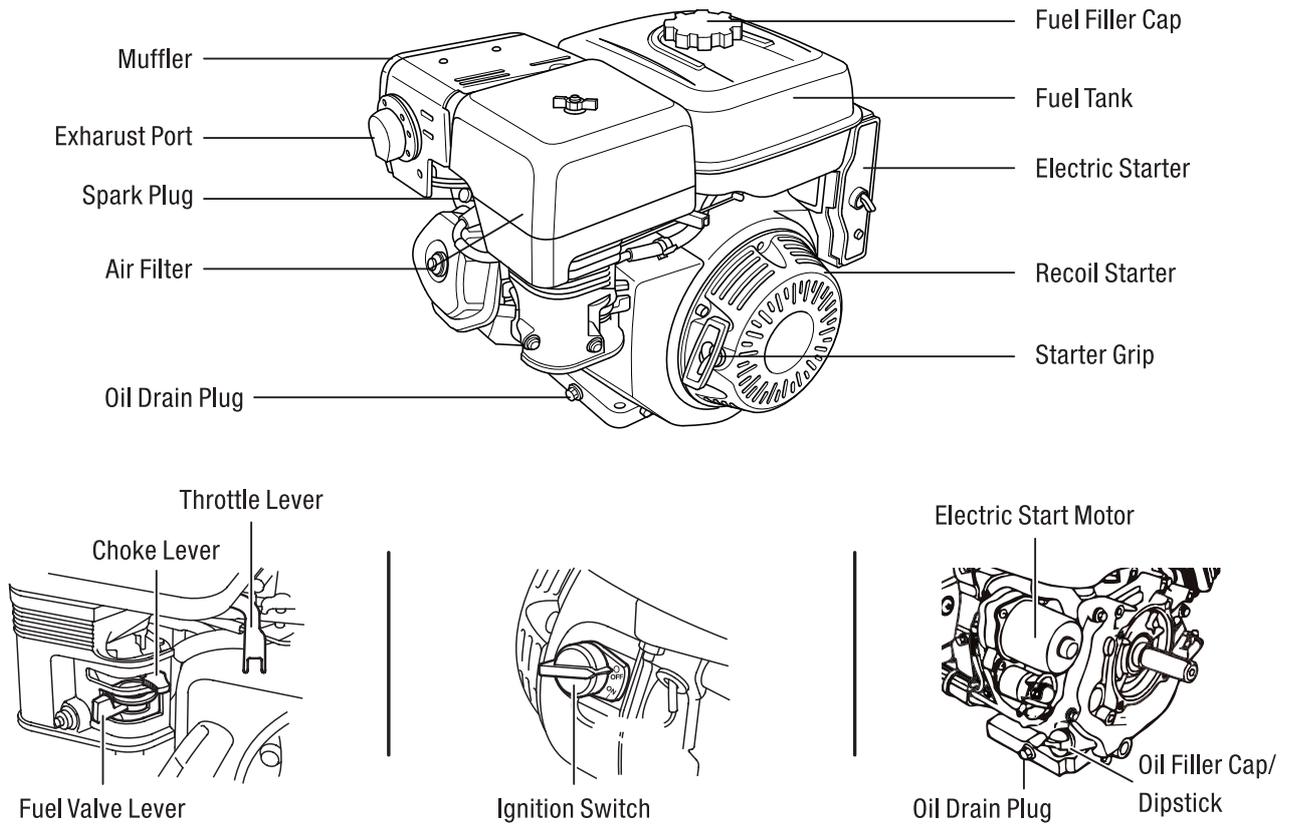

5.4 Engine

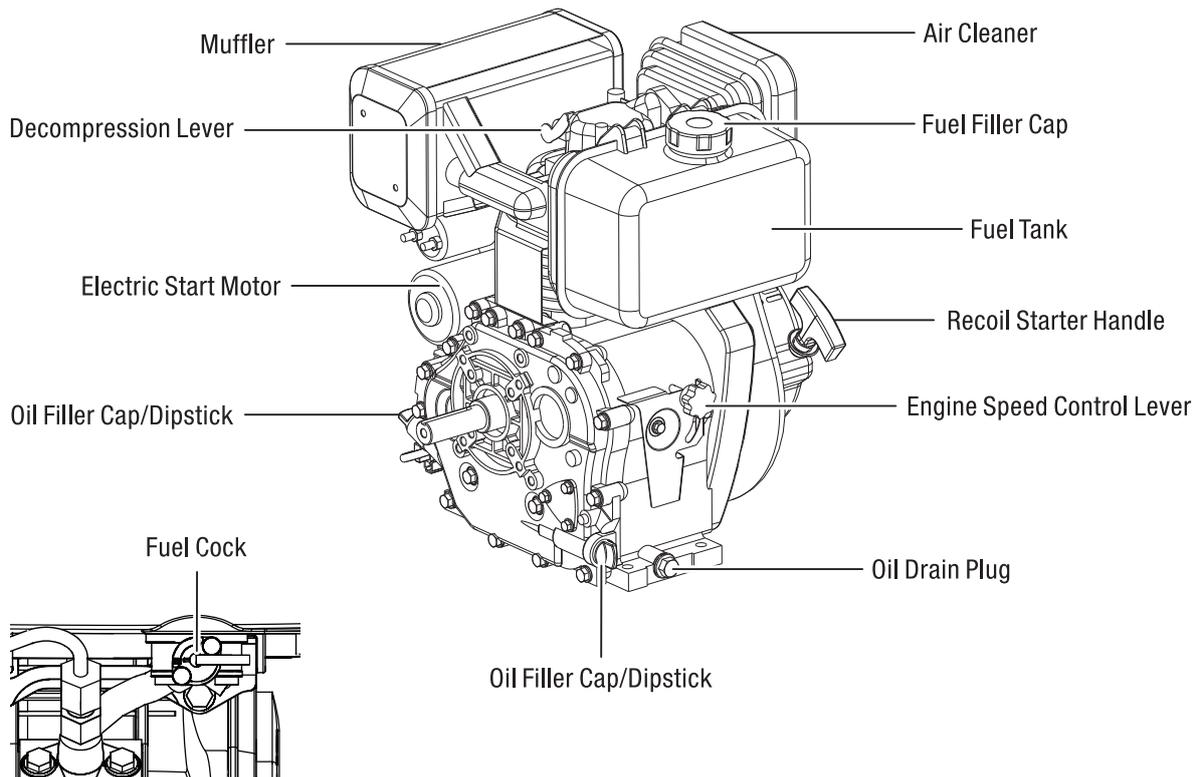

5. Parts Identification and Features (Continued)

5.5 General Technology

PSI: Pounds per square inch --common unit measure used for water pressure, air pressure, hydraulic pressure and pounds of force.

GPM: Gallons per minute (liters per minute [metric]) --common unit measure used for flow rate of water.

Bypass Mode: In bypass mode, high pressure pump recirculates water because spray gun trigger is not pulled.

High Pressure Washer Pump

1. Pump Model & Serial Number: It contains the year, month and day of production, and can track the batch of materials assembler and tester. Please provide the serial no. along with the pump model and version when ordering spare parts and reporting any issues of concern.
2. Pressure Adjusting Knob: To raising or reduce the pressure by turn the knob.
3. Detergent Injector: Use to siphon detergent or other pressure washer chemicals into the low pressure stream.
4. Water Outlet Connector: To connect high pressure hose.
5. Water Inlet With Filter Screen: Connect garden hose here, and always have the filter screen present in it.
6. Red Shipping Plug Attached With Vent Plug: the pump is ship with red shipping plug to prevent oil leaking during transportation. Replace with the attached vent plug before using.
7. Thermal Relief Valve: Cycles water through pump when water reaches 125-155 °F (50-68 °C). Warm water will discharge from pump onto ground. This valve can prevent internal pump damage.
8. High Pressure Turning Valve: This is a valve can discharges the air in the pump and water in-taking pipe line, enhance pump sucking ability, and allow to suck from the barrel and 1M deep.
9. Easy Start Valve: Releases the head build pressure which will against the start when pulling start the engine, help to easy start.

Gas Engine

1. Air Cleaner/Filter: Protects engine by filtering dust and debris out of intake air.
2. Fuel Tank: Fill tank with regular unleaded fuel. Always leave room for fuel expansion.
3. Throttle Lever: Sets engine in starting mode for recoil starter.
4. Choke Lever: Prepares a cold engine for starting.
5. Fuel Valve Lever: Used to turn fuel on and off to engine.
6. Recoil Starter: Use for starting the engine manually.
7. Ignition Switch: Set this switch to "On" before using recoil starter. Set switch to "Off" to switch off engine.
8. Oil Fill Cap: Fill engine with oil here.

Diesel Engine

1. Air Cleaner: The air cleaner prevents airborne contaminants from entering the diesel engine.
2. Fuel Tank: The fuel tank is a reservoir that holds diesel fuel.
3. Starter Motor: It is powered by the battery and engage the flywheel in motion to start the diesel engine.
4. Fuel Cock: To turn "ON" or "OFF" the fuel supply to the injection pump.
5. Recoil Starter: Use for starting the engine manually.
6. Decompression Lever: It helps to start the engine by reducing the effort needed to pull the recoil starter handle.

6. Unpacking & Assembly

Your pressure washer requires some assembly and is ready for use after it has been properly serviced with the recommended oil and fuel. Tool need open-end wrench 10mm, 14mm, 17mm.

6.1. Unpack Pressure Washer.

- 1.1 Set carton on a rigid, flat surface. Remove all loose parts and packing. Leave pressure washer in carton.

CAUTION

Unit is heavy. Do not attempt to lift and remove the unit from the carton.



- 1.2 Using a box cutter, open carton completely by cutting the four corners allowing the sides to lay flat. Leave pressure washer on carton while installing wheel, leg rubber bumpers.

6.2. Assembly the Wheel

- 2.1 Remove the nut, spring washer and washer from the axle.
- 2.2 Fit the axles into the wheel axle ports, secure with the nut, spring washer and washer.
- 2.3 Lift the machine and fit the axles into the axle ports that at the bottom of the frame, and ensure the nipple of the spring clip is clocked into the small hole.

NOTE: Do not over tighten the nuts, the wheels must be able to rotate freely.

6.3. Assembly the Gun/Hose Hook

- 4.1 Fit the hook into the position shown and secure using the washers and nuts on the bracket

7. Setting Up Before Use


7.1. Preparing The Pressure Pump and Gearbox

The pressure pump has a shipping plug inserted into the opening for the pump breather plug.

WARNING

Failure to remove shipping plug and replace it with the dipstick/oil plug will damage pressure pump. Failure to add pump breather plug could void warranty

1. Using an 17mm open-end wrench or socket wrench, remove shipping plug from pressure pump and gearbox. Discard shipping plug.
2. Remove pump breather plug from parts bag and insert it into pump and gearbox.
3. Tighten the breather plug securely by hand. Do not use openend wrench or socket wrench to tighten. Using a wrench to tighten the breather plug could strip threads.
4. Use sight glass on the side of pump and gearbox to ensure oil is at 1/2 of the sight glass level.
5. Add oil to pump and gearbox if level is below indicator on oil gauge. Use 30-weight non-detergent oil.
6. Outdoor temperatures determine the proper oil viscosity.
 - **Below 40 F (4 C) the use of SAE 30 will result in hard starting.
 - **Above 80 F (27 C) the use of 10W30 may cause increased oil consumption.Check oil level more frequently.

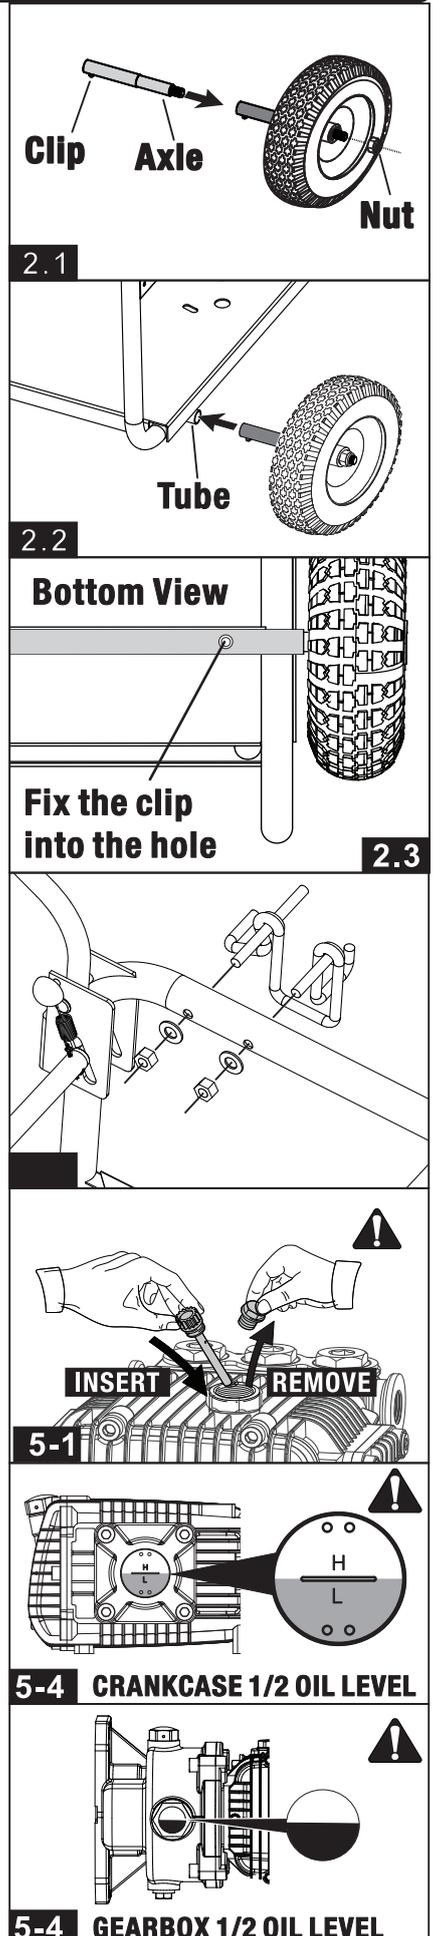

7. Setting Up Before Use (Continued)

7.2. Add Oil To The Gas Engine

1. Place pressure washer on a flat, level surface.
2. Clean area around oil fill and remove yellow oil fill cap.
3. Using oil funnel (optional), slowly pour contents of provided oil bottle into oil fill opening.
4. Replace oil fill cap and fully tighten.



NOTICE

Improper treatment of pressure washer can damage it and shorten its life.

DO NOT attempt to crank or start the engine before it has been properly serviced with the recommended oil. This may result in an engine failure.

7.3 Add Fuel To the Gas Engine



WARNING

Failure to use fuel as recommended in this manual will void the warranty.

DO NOT use unapproved gasoline such as E85 (85% ethanol/15% gasoline).

DO NOT mix oil with gasoline.

DO NOT modify engine to run on alternate fuels.

Mix in a fuel stabilizer when adding fuel to pressure washer to protect fuel system from forming gum deposits. If engine doesn't run properly after fueling, switch fuel brands. The engine is certified to run on gasoline. The emission control system for this engine is EM (Engine Modifications).





WARNING

Fuel and fuel vapor are extremely flammable and explosive. Fire or explosion from misuse of fuel can cause severe burns and even death.







WHEN ADDING FUEL TO PRESSURE WASHER, OBSERVE THE FOLLOWING STEPS:

1. Turn pressure washer **OFF** and let it cool for at least two minutes before removing fuel cap. Loosen fuel cap slowly to release pressure.
2. Fill fuel tank outdoors.
3. **DO NOT** overfill fuel tank. Leave room for fuel to expand.
4. Wait for spilled fuel to evaporate before cranking engine.
5. Keep fuel away from sparks, open flames, pilot lights, heat and other ignition sources.
6. **DO NOT** light a cigarette or smoke near open fuel tank or container.
7. Clean area around fuel fill cap and slowly remove cap to allow any pressure to escape.
8. Slowly add unleaded gasoline **(A)** to fuel tank **(B)**. Use extreme caution not to fill fuel above baffle **(C)**. This allow appropriate space for fuel expansion.
9. Install fuel cap and allow any spilled fuel to evaporate before starting engine.

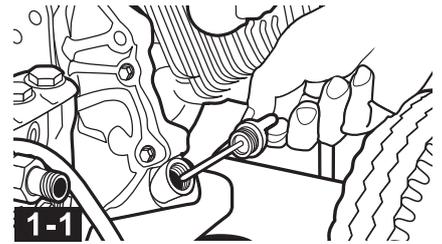

1-2

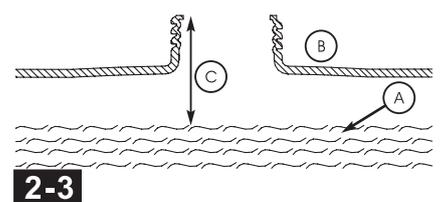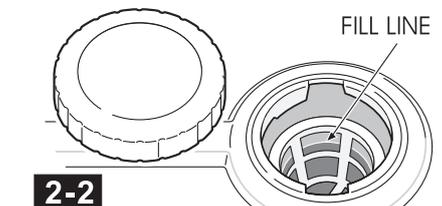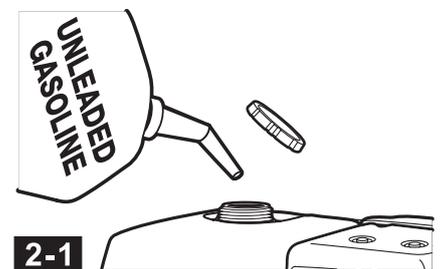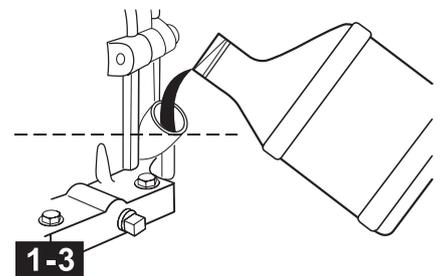

7. Setting Up Before Use (Continued)

3. Attaching High Pressure Hose to Spray Gun

- 3.1 Pull slip ring on female quick-disconnect fitting of high pressure hose back.
- 3.2 Insert male quick-disconnect fitting on spray gun into female quick-disconnect on high pressure hose
- 3.3 Release slip ring on female quick-disconnect and twist. Listen for click to ensure both quick-disconnects are coupled.
- 3.4 Pull high pressure hose and spray gun in opposite direction to ensure they do not separate.

4. Connecting Spray Wand to Spray Gun






- 4.1 Thread spray wand onto spray gun.

5. Connect Hose and Water Supply to Pump

- 5.1 Similarly, attach other end of high pressure hose to high pressure outlet on pump. Pull down on collar of quick connect, slide onto pump and let go of collar. Pull on hose to be sure of tight connection.
- 5.2 Before connecting garden hose to water inlet, inspect inlet screen . Clean screen if it contains debris or have it replaced if damaged. **DO NOT** run pressure washer if inlet screen is damaged.
- 5.3 Run water through your garden hose for 30 seconds to clean out any debris.

IMPORTANT: DO NOT siphon standing water for the water supply. Use **ONLY** cold water (less than 100 F).

- 5.4 Connect the garden hose (not to exceed 50 feet in length and with the ID no less than 13mm) to the water inlet. Tighten by hand.
- 5.5 Turn **ON** the water, squeeze the trigger to purge the pump system of air and impurities.

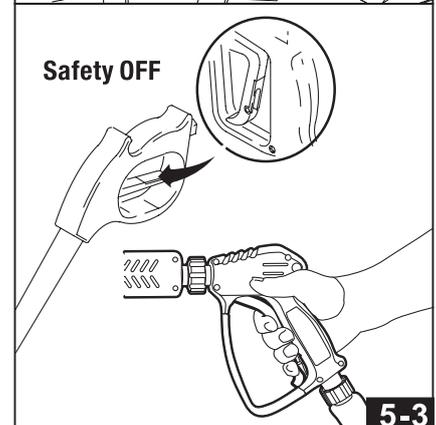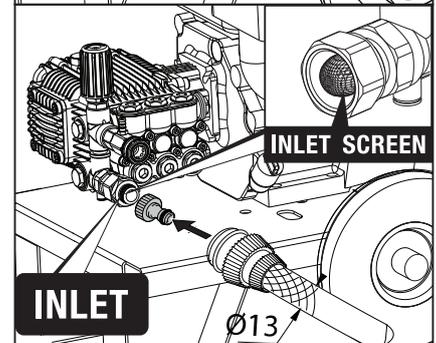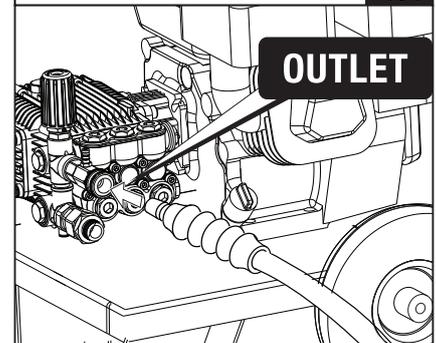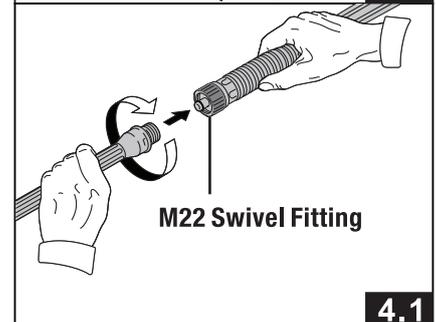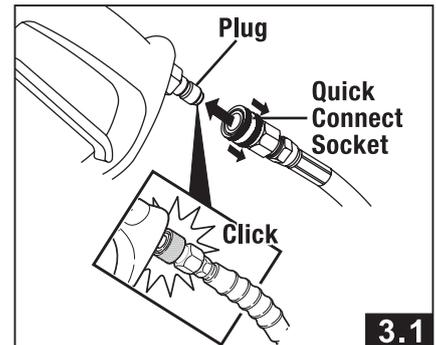

NOTICE

- **DO NOT** attempt to crank or start the engine before it has been properly serviced with the recommended oil.

This may result in an engine failure. • There **MUST** be at least ten feet (3 m) of unrestricted garden hose between the inlet and any device, such as a vacuum breaker or check valve. • Damage to equipment resulting from failure to follow this instruction will **VOID WARRANTY**.



WARNING

Risk of eye injury.
Spray can splash back or propel objects.

- **Always** wear safety goggles when using this equipment or in vicinity of where equipment is in use.
- **Before** starting the pressure washer, be sure you are wearing adequate safety goggles.
- **NEVER** substitute safety glasses for safety goggles.



8. Setting Up Before Use (Diesel Engine)



NOTICE

Improper treatment of pressure washer can damage it and shorten its life.

DO NOT attempt to crank or start the engine before it has been properly serviced with the recommended oil. This may result in an engine failure.

8.1 Checking Engine Oil

1. Place pressure washer on a flat, level surface.
1. Remove oil cap/dipstick and wipe with clean cloth.
1. Fully reinsert oil cap/dipstick but do not screw in.
1. Remove oil cap/dipstick, the oil level should be between the H upper level and L level.
1. Fully reinsert oil cap/dipstick and hand tighten. Do not over tightening it.

8.2 Adding Engine Oil

1. Place pressure washer on a flat, level surface.
1. Remove oil cap and add indicated amount of oil at either one of the filler ports, wait one minute and check oil level, add more oil if necessary.
3. Fully reinsert oil cap and hand tighten it.

8.3 Engine Oil Recommendations

SAE 10W-30 is recommended for general use. Other viscosities shown in the chart may be used when the average temperature in your area is within the indicated range.

Above 80 F (27 C) the use of 10W30 may cause increased oil consumption. Check oil level more frequently.

8.4 Adding Fuel




WARNING



Fuel and fuel vapor are extremely flammable and explosive. Fire or explosion from misuse of fuel can cause severe burns and even death.


WHEN ADDING FUEL TO PRESSURE WASHER, OBSERVE THE FOLLOWING STEPS:

1. Turn pressure washer OFF and let it cool for at least two minutes before removing fuel cap. Loosen fuel cap slowly to release pressure.
2. Clean the area around the fuel cap.
3. Remove the fuel cap from the fuel tank.
4. Fill fuel tank outdoors.
5. Stop filling when the fuel is at the same level as the middle ring on the inlet fuel screen. Never overfill the fuel tank.
6. Replace the fuel cap and hand tighten. Do not over-tightening it.

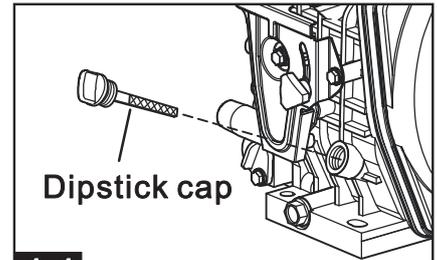

Dipstick cap


1-1

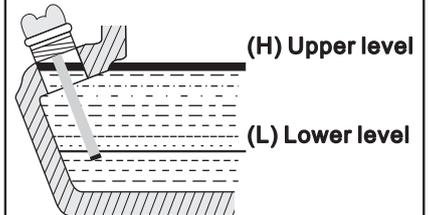



(H) Upper level

(L) Lower level

1-2

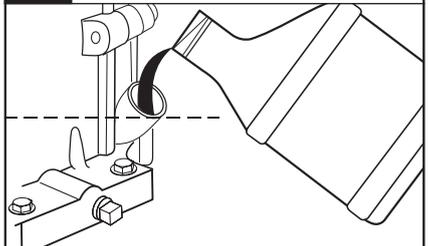

1-3

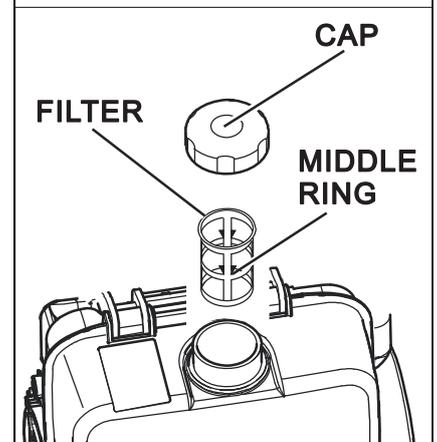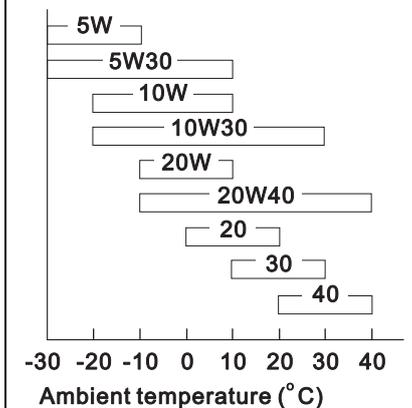

9. Safe Working Environment

Pressure Washer Location Clearances and Air Movement



WARNING

- Exhaust heat/gases can ignite combustibles, structures or damage fuel tank causing a fire.

Keep at least 5 ft. (1.5 m) clearance on all sides of pressure washer including overhead.



Place pressure washer in a well ventilated area, which will allow for removal of deadly exhaust gas. Do not place pressure washer where exhaust gas could accumulate and enter inside or be drawn into a potentially occupied building. Ensure exhaust gas (A) is kept away from any windows, doors, ventilation intakes, or other openings that can allow exhaust gas to collect in a confined area. Prevailing winds and air currents should be taken in



WARNING


- Running engine gives off carbon monoxide, an odorless, colorless, poison gas.
- Breathing carbon monoxide can cause headache, fatigue, dizziness, vomiting, confusion, seizures, nausea, fainting or death.



Operate pressure washer ONLY outdoors.

Keep exhaust gas from entering a confined area through windows, doors, ventilation intakes, or other openings.

DO NOT start or run engine indoors or in an enclosed area, even if windows and doors are open.

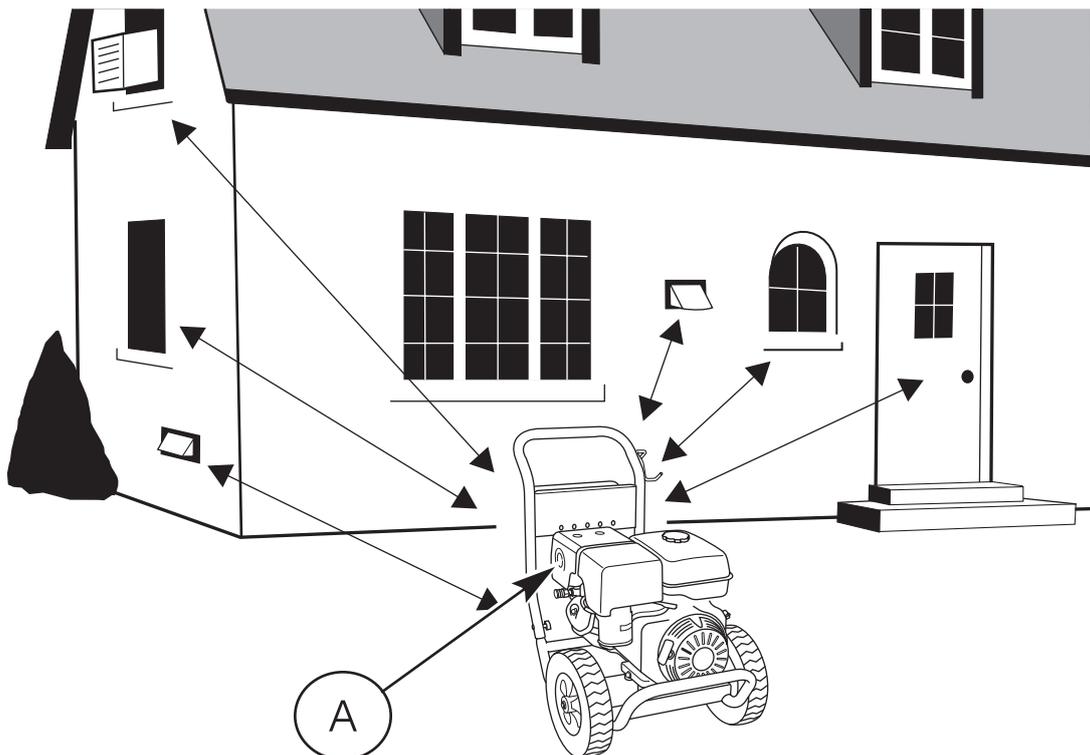

10. Startup and Stopping Procedure (Gas Engine)

10.1 How to Start Your Pressure Washer

To start your pressure washer for the first time, follow these instructions step-by-step. It also applies if you have let the pressure washer sit idle for at least a day.

1. Place pressure washer near an outside water source capable of supplying water at a flow rate at least 5GPM/19LPM and no less than 20PSI/1.3BAR at pressure washer end of garden hose.
2. Check that high pressure hose is tightly connected to spray gun and pump.
3. Make sure unit is in a level position.
4. Uncoil high pressure hose completely before using pressure washer.
5. Connect garden hose to water inlet on pressure washer pump.
6. Turn ON water, point gun in a safe direction and squeeze trigger to purge pump system of air and impurities.
7. Attach wand to spray gun. Tighten by hand.
8. Choose the nozzle you want to use, pull back on collar of quick connector, insert nozzle and release collar. Tug on nozzle to make sure it is securely in place.



NOTICE

DO NOT run the pump without the water supply connected and turned on.

Damage to equipment resulting from failure to follow this instruction will **VOID WARRANTY.**

9. Make sure the Battery is in good condition and well connected.
10. Rotate fuel shut-off valve to “OPEN” position.
11. Move throttle control lever 1/3 toward “FAST” Position.
12. Move choke lever to “CHOKE” position.
13. Turn the engine switch to the “ON” position, and turn the key to “START” position and hold it there until the engine starts. If the engine fail to start within 5 seconds, release the key and wait at least 10 seconds before operating the starter again.

NOTE: for a warm engine, be sure the choke lever is in the “run” position.

14. When engine starts, slowly move choke lever to “RUN” position, as engine warms. If engine falters, move choke lever to “CHOKE” position, then to “RUN” position.
15. After each starting attempt, where engine fails to run, always point gun in safe direction and squeeze spray gun trigger to release high pressure.

NOTE: Using the electric starter for more than 5 seconds at a time will overheat the starter motor and can damage it.

IMPORTANT: Allow the Engine to run at no load, low pressure for five minutes after each start-up so Engine can stabilize.







10.2 How to Stop Your Pressure Washer

1. To stop the engine method 1: Turn the Ignition switch to OFF, close the fuel valve.
2. To stop the engine method 2: Close the Fuel Valve and wait for the engine to stop.

NOTE: Avoid letting fuel remain in the carburetor for lone periods as this can clog carburetor passages with impurities resulting in malfunctions.

3. Squeeze trigger to release retained high water pressure.

IMPORTANT: Spray gun traps high water pressure, even when engine is stopped and water is disconnected.

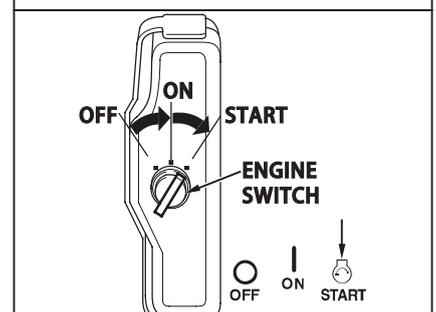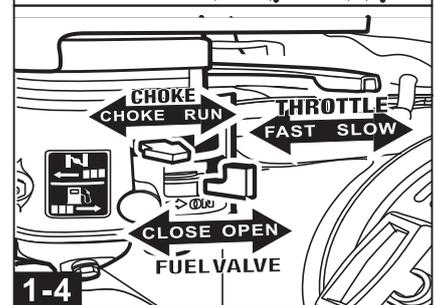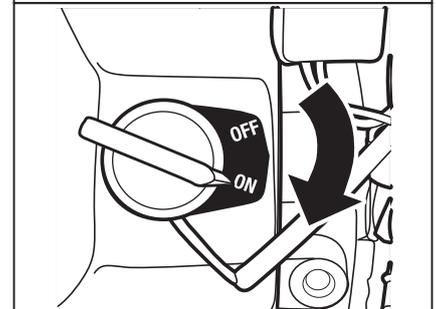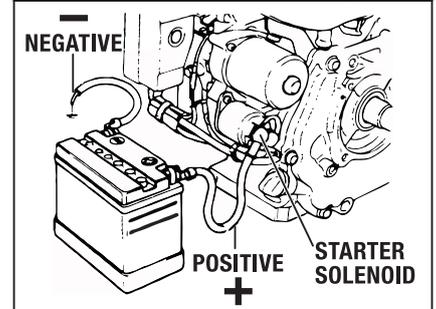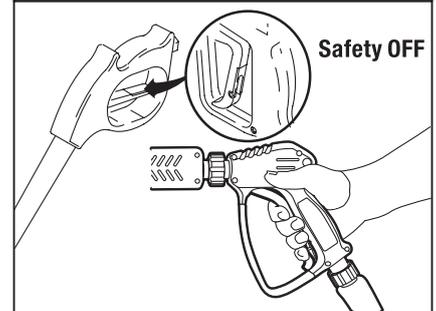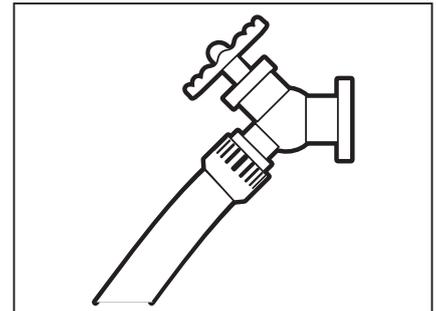

11. Startup and Stopping Procedure (Diesel Engine)

11.1 How to Start Your Pressure Washer

1. Place pressure washer near an outside water source capable of
2. Rotate fuel valve to “On” position
3. Turn the engine speed control knob (A) to the left (B). Slide the engine speed control knob to the **START** position (C). Turn the engine speed control knob to the right (D) to tighten it.
4. Make sure the Battery is in good condition and well connected.
5. Turn the Key clockwise to the START position. Release the key as soon as the engine starts. It will return to the ON position.

NOTE: If the engine fails to start:

- 1) Wait until the engine complete stop. Engaging the starter while the engine in rotating will damage to the start motor and flywheel.
- 2) Wait at least 30 seconds before you attempt to start the engine again.


IMPORTANT: Allow the Engine to run at no load, low pressure for five minutes after each start-up so Engine can stabilize.

11.2 Cold Start in winter

If the engine is difficult to start in winter, see the engine manual for instructions on how to cold start.

11.3 How to Stop Your Pressure Washer

1. Release spray gun trigger and allow the engine to run unloaded for **3** minutes before shutting down.
2. Turn the engine speed control knob to the left (B), slide the knob to the **STOP** (A) position, turn the knob to the right (D) to tighten it.
3. Turn the engine switch to the “OFF” position and remove the key.
4. Rotate fuel valve to “OFF” position
5. Point spray gun in a safe direction, squeeze spray gun trigger to release retained high water pressure. Engage the gun trigger safety catch.

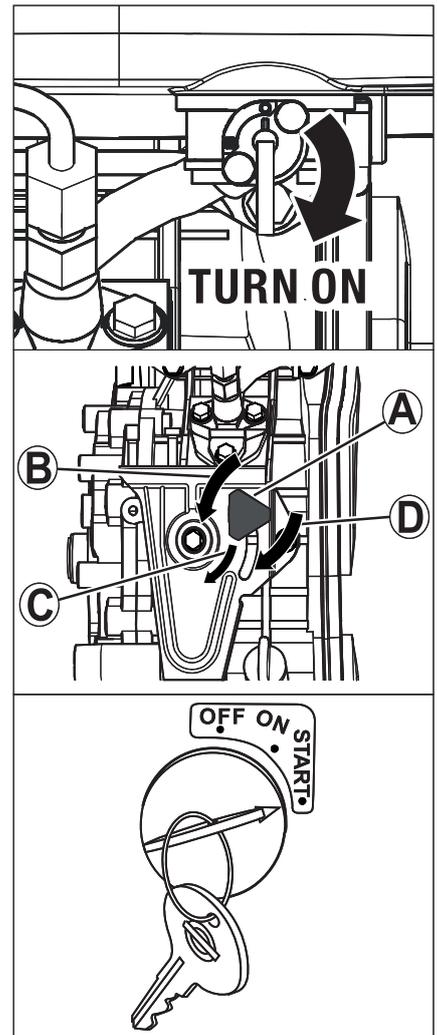

12. Pump Self-Priming Setup (If applicable)



NOTICE


DO NOT run the pump by self-priming it without the High Pressure Turning Valve.

Run dry the pump will damage the internal parts and will VOID WARRANTY.

How the high pressure turning valve works for self priming.

This is a valve can discharges the air in the pump and water in-taking pipe line, enhance pump sucking ability, and allow to suck from the barrel and **1M** deep.

1. Put the water sucking hose into the barrel, pools etc. with filter on the end.
2. Turn the **VALVE CAP** anticlockwise to open the valve.
3. Wait 15 to 30seconds for pump self-priming, if the pump fail to sucking water, stop engine and check if the sucking hose or filter is block or loose in connection. And make sure do not let the pump deep sucking from more then 1Meter.
4. When the pump builds up pressure and water shooting out from **BYPASS NIPPLE**, Close the valve and start normal using.

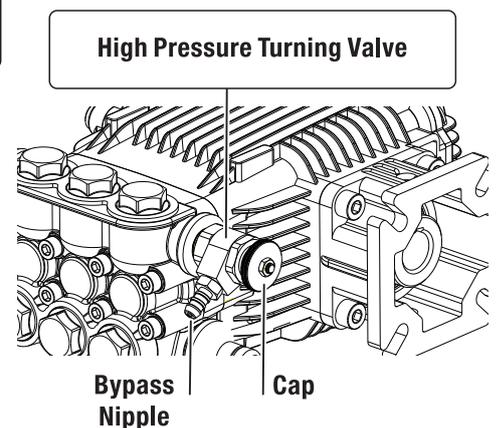

13. Using Nozzles

13.1 Attaching Pressure Nozzles to Spray Wand

1. Engage trigger lock on spray gun.
2. Pull slip ring on female quick-disconnect fitting of spray wand back.
3. Insert nozzle into female quick-disconnect socket on spray wand.
4. Release slip ring on female quick-disconnect and twist. Listen for “**LICK**” to ensure both quick-disconnects are coupled.
5. Pull the nozzle and spray wand in opposite direction to ensure they do not separate.

13.2 Nozzle Size Guide

The pressure washer comes with five spray nozzles. Each nozzle is color coded and delivers a specific spray pattern and pressure for a particular cleaning job. The size of the nozzle determines the size of the fan spray and the pressure out of the nozzle. They are stored in receptacles on a panel mounted to the handle of the washer. Colors on the panel identify nozzle location and spray panel.

WARNING

• Pressure washer produces fluid pressures and velocities high enough to penetrate human and animal flesh which could result in serious injury or amputation. • Do not point pressure washer in direction of people or animals. • High velocity fluid spray can cause objects to break, propelling particles at high speeds.

0° Nozzle - Red: This nozzle delivers a pinpoint stream of pressurized water and is extremely powerful. It covers only a small area of cleaning. This nozzle should only be directed at surfaces that can withstand high pressure such as metal or concrete. Do not use this nozzle to clean wood.

15° Nozzle - Yellow: This nozzle delivers a powerful 15 degree spray pattern for intense cleaning of small areas. This nozzle should only be used on areas and materials that can withstand high pressure.

25° Nozzle - Green: This nozzle delivers a 25 degree spray pattern for intense cleaning of larger areas. This nozzle should only be used on areas that can withstand the pressure.

40° Nozzle - White: This nozzle delivers a 40 degree spray pattern and a less powerful stream of water. This nozzle can cover a wide area and should be used for most general cleaning jobs.

Chemical Nozzle - Black: This nozzle is used to apply special chemicals and cleaning solutions. This nozzle produces the weakest pressure stream of the five nozzles.


13.2 Interchanging Pressure Nozzles

Turn off pressure washer before attempting to change nozzles. Follow the steps below:

1. Pull slip ring of quick-disconnect back and remove pressure nozzle.
2. Flow the 13.1.3-5 process to insert the nozzle.

WARNING


Never place hands in front of nozzle. Never grasp hose or fittings during pressure washer operation. Never attempt to attach or remove spray wand or hose fittings while pressure washer system is pressurized.

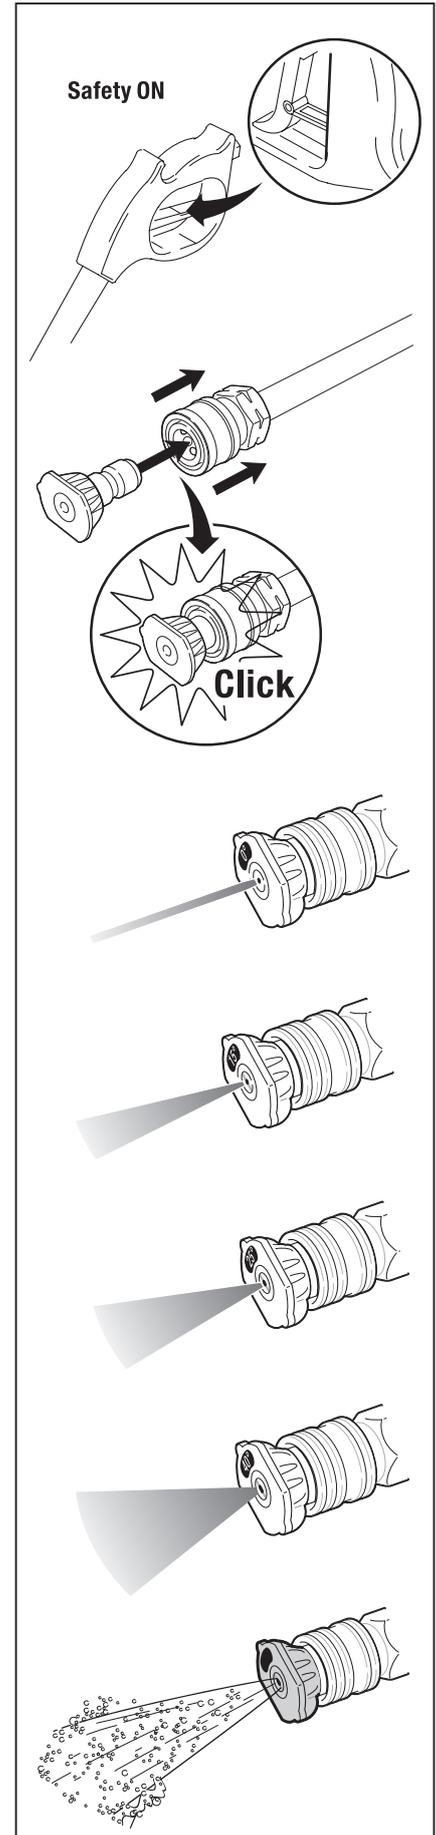

14. Adjusting Spray Pressure

Pressure Rinsing

1. Remove black spray tip from nozzle extension.
2. Select and install desired high pressure spray tip.
3. Keep spray gun a safe distance from area you plan to spray.
4. Increase (decrease) spray pressure by turning pressure control knob clockwise (counterclockwise).
5. Apply a high pressure spray to a small area and then check surface for damage. If no damage is found, you can assume it is okay to continue rinsing.
6. Start at top of area to be rinsed, working down with same overlapping strokes as you used for cleaning.

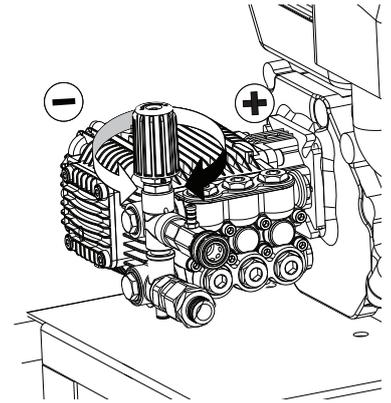


15. Using Chemicals & Detergents

NOTE: Use only detergents designed for pressure washers; household detergents, acids, alkalines, bleaches, solvents, flammable material, or industrial grade solutions can damage the pump. Many detergents may require mixing prior to use. Prepare cleaning solution as instructed on the solution bottle.


15.1 Set Up Procedure:

1. Attach the chemical hose onto the barbed fitting situated near the back of the high pressure hose connection.
2. Press the other end of the chemical hose (with the filter attached) into the container holding the chemicals or detergents you are using.
3. Attach the chemical nozzle onto the lance as shown previously .

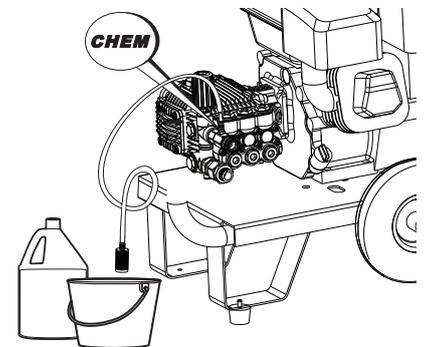

15.2 Chemical Cleaning

1. Spray the chemicals onto a dry surface using the procedures outlined in previous sections. Start at the lower portion of the cleaning area and working upwards, using long, even, overlapping strokes.
2. Always ensure that the filter is fully submerged in the cleaning solution at all times.
3. Allow the detergent to soak in for 3-5 minutes before washing and rinsing.
4. Re-apply as needed to prevent the surface from drying. Do not allow the detergent to dry on to the cleaning surface to prevent streaking.

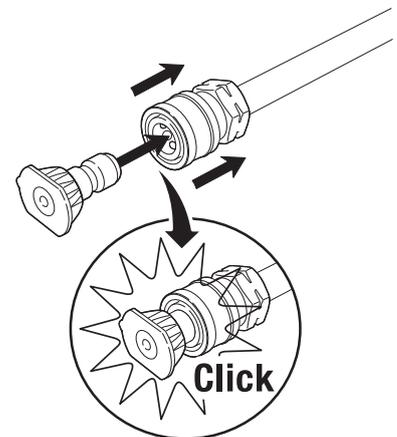


NOTE: Detergent cannot be applied with the high pressure spray tips (white, green, yellow or red)

15.3 After Chemical Cleaning

IMPORTANT: You will need to flush the detergent siphoning system after each use by placing the filter into a bucket of clean water then run the pressure washer in low pressure for 1-2 minutes.

1. After using chemicals, soaps and detergents it is necessary to thoroughly clean the pressure washer.
2. Place the chemical hose in a container of clean water.
3. Turn on the pressure washer and hold the trigger on the spray gun top draw clean water through the system to clean it thoroughly.

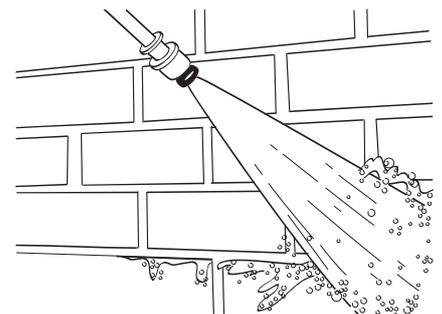

16. Maintenance

To ensure efficient operation and longer life of your pressure washer a routine maintenance schedule should be prepared and followed. If the equipment is used in unusual conditions such as high-temperature or dusty conditions more frequent maintenance checks will be required.

WARNING

Before performing any maintenance be aware that the equipment should be completely shutdown, depressurized and allowed to cool down. This will ensure that no injuries can be sustained by moving parts, water pressure or hot surfaces.

Engine contains flammable fuel do not smoke near or work near naked flames while maintaining this equipment.

Please note: All repairs should be carried out by Dealer approved engineers. All replacement parts should be supplied or recommended by the Dealer. Any unapproved repairs or modifications will invalidate the warranty.

16.1 Engine:

Check the engine regularly, replace oil, clean spark plugs and maintain parts as required.

16.2 Pump Oil:

Change the pump oil regularly. Change the pump oil after the first 30 hours of work and successively every 100 hours. In either case ensure that the oil is changed at least once a year. Check with your nearest Dealer for advice on the best Pump Oil to use with this equipment if you are unsure.

NOTICE

Avoid prolonged or repeated skin contact with used motor oil.

Used motor oil has been shown to cause skin cancer in certain laboratory animals. Thoroughly wash exposed areas with soap and water.



KEEP OUT OF REACH OF CHILDREN. DON'T POLLUTE. CONSERVE RESOURCES. RETURN USED OIL TO COLLECTION CENTERS.


16.3 Nozzle Tips:

If the nozzle becomes clogged with dirt and debris excessive pressure can build up. If the nozzle becomes partially clogged or restricted the pump pressure will fluctuate and can become harmful and dangerous.

Clean the nozzle immediately and follow these instructions:

1. Shut-off the engine and turn off / disconnect the water supply.
2. Pull the trigger on the gun to relieve any water pressure.
3. Disconnect the lance from the gun.
4. Remove the nozzle from the lance - remove any obstructions with the nozzle cleaning tool and back flush with clean water.
5. Direct the water supply into the spray wand end to back flush loosened particles for 30 seconds.
6. Reassemble the nozzle onto the lance.
7. Reconnect the lance to the gun and turn on the water supply.
8. Start the washer pump and place the lance into the high pressure setting to test.


Nozzle Cleaning Pin




16.4 Cleaning The Water Filter:

The water filter should be checked regularly and cleaned if necessary:

1. Remove the filter by grasping the end and removing it from the water inlet on the pump.
2. Clean the filter by flushing it with water on both sides.
3. Re-insert the filter in the water inlet on the pump.



Water Filter In-place



Water Filter Removed

16. Maintenance (Continued)

16.5 High Pressure Hose:

Replace the high pressure hose when the hose have any of the below circumstance:

1. Cover damaged.
2. Burst.
3. Bubbles/blisters.
4. Kinked/collapsed.

WARNING



The high pressure stream of water can cut through skin and its underlying tissues, leading to serious injury and possible amputation.

- Never repair high pressure hose. Replace it.
- Replacement hose rating MUST exceed maximum pressure rating of the unit.

16.6 Cleaning the Fuel Tank Filter:

The fuel tank filter should be removed and cleaned after every 150 hours of running or every 3 months using an environmentally friendly water-based de-greasing agent. Refit when clean.

16.7 Maintenance Schedule (Gas Engine)

Item	Task Description	Each Use	1st Month (20Hrs)	Frequency Each Season (50Hrs)	Every 6 Months (100Hrs)	Every YEAR (300Hrs)
Engine Oil	Oil Level Check	•				
	Replace		•		•	
Reduction Gear Oil (If applicable)	Oil Level Check	•				
	Replace		•		•	
Air Cleaner/filter	Check	•				
	Clean			•X	•X	
	Replace					•
Deposit Cup	Clean				•	
Spark Plug	Clean, Adjust				•	
	Replace					•
Spark Eliminator	Clean				•	
Idling	Check, Adjust					•
Valve Clearance	Check, Adjust					•
Fuel Tank & Filter	Clean					•
Fuel Supply Line	Check	Check with your Dealer for advice if any problem are detected				

Key:

* = Only for inside ventilating double core carburetors

** = Only for paper core cleaners

x = Repeat task more often than scheduled if equipment is used in dusty working environments

Δ = Maintenance to be carried out by Dealer approved technician

17. Storage

17.1 After General / Regular Use

1. Drain all water from the high pressure hose, coil it and hang on the cradle on the petrol washer frame. If chemicals were used ensure the pump and chemical hose are thoroughly cleaned out.
2. Drain all the water from the gun and lance by holding the gun in a vertical position with the nozzle end pointing down and squeeze the trigger. Store in the gun/hose holder.

17. Storage (Continued)

17.2 Preparation for Winter and Long-term Storage



Note: It is recommended that you follow these steps to protect the internal seals of the pump when storing the equipment for more than 30 days and or when, freezing temperatures are expected.

1. Obtain a funnel, 200ml of antifreeze and approximately 1M of garden hose with a male hose connector attached to one end.
2. Disconnect the spark plug wire.
3. Connect the hose to water inlet on the pump.
4. Pour the antifreeze into the hose via the funnel.
5. Pull the engine starter cord slowly several times until antifreeze comes out of the high pressure water hose connection on the pump.
6. Remove the short hose from the water inlet on the pump.
7. Reconnect the spark plug wire.

17.3 Long Term Storage Instructions (DIESEL ENGINE)

Follow the instructions below if you plan to storing the D engine for a long periods of time.

- 1) Run the engine for 3 minutes to burn out the excess fuel in the chamber.
- 2) Stop the engine. Drain the engine lube oil while the engine is still warm and refill it with the new oil.
- 3) Remove the rubber plug on the rocker arm and put about 2cc of the lubricant into it, put it back in place
- 4) Recoil starting
Push the decompression lever down and hold it while you pull the recoil starter 2 or 3 times.
(Do not start the engine).
- 5) Electric starting
Hold down the decompression lever and turn the start key switch to the START position.
Let the engine rotate for about 2-3 seconds
- 6) Pull the decompression lever up and pull the recoil starter slowly until you feel resistance.
The resistance point occurs on the compression stroke where the intake and exhaust valves are closed. It is also the will prevent moisture from entering the chamber to cause rust.
- 7) Wipe the oil and dirt from the engine.



17.4 Service After Storage (Gas Engine)

Before reusing the equipment after storage, you should carry out the following to keep the equipment in good condition.

Storage Time	Service Tank
Within one month	No service required
One - two months	Drain out the existing fuel out of the fuel tank and fresh fuel
Two months - one year	Drain out the existing fuel out of the fuel tank and fresh fuel Drain the fuel out of carburetor Empty the deposit cup
Over a year	Drain out the existing fuel out of the fuel tank and fresh fuel Drain the fuel out of carburetor Empty the deposit cup Close the FUEL VALVE and wait engine to stop

Key:

* = Unscrew the drain plug and drain out the fuel in the carburetor

** = Turn engine switch to the off position, disconnect the deposit cup and empty contents safely

Note: Do not dump oil vessels or discarded engine oil onto the ground. Take all discarded engine oil in a closed container to your nearest recycling station.


18. Troubleshooting

PROBLEM	PROBABLE CAUSE	SOLUTION
Engine shuts down when running.	<ol style="list-style-type: none"> 1.Out of fuel. 2.Low Engine Oil 	<ol style="list-style-type: none"> 1.Fill fuel tank. 2.Add oil.
Engine will not start; or starts and runs rough.	<ol style="list-style-type: none"> 1.Rocker switch set to "OFF" position. 2.Fuel valve is in "OFF" position. 3.Dirty air cleaner 4.Out of fuel. 5.Stale fuel. 6.Spark plug wire not connected to spark plug. 7.Bad spark plug. 8.Water in fuel. 9.Flooded. 10.Excessively rich fuel/air mixture. 11.Intake valve stuck open or closed. 12.Engine has lost compression. 13.Low engine oil. 14.Wrong Fuel. 15.Engine is too hot 16.Chock is in wrong position 17.Pressure Builds up after 2 pulls on recoil starter or after initial use. 	<ol style="list-style-type: none"> 1.Set switch to "ON" position. 2.Turn fuel valve to "ON" position. 3.Clean or replace air cleaner 4.Fill fuel tank. 5.Drain fuel tank and carburetor; fill with fresh fuel. 6.Connect wire to spark plug. 7.Replace spark plug. 8.Drain fuel tank and carburetor; fill with fresh fuel. 9.Wait 5 minutes and re-crank engine. 10.Contact authorized service facility. 11.Contact authorized service facility. 12.Contact authorized service facility. 13.Add oil. 14.Use recommended fuel. 15.Allow engine to cool 16.Change chock position 17.Squeeze gun trigger to relieve pressure.
Engine "Hunts" or falters.	<ol style="list-style-type: none"> 1.Carburetor Is running too rich or too lean. 	<ol style="list-style-type: none"> 1.Contact authorized service facility.
Engine lacks power.	<ol style="list-style-type: none"> 1.Cylinder pressure is low. 2.Dirty air cleaner 	<ol style="list-style-type: none"> 1.Contact authorized service facility. 2.Replace air filter.
Starter motor operates but DIESEL engine does not start	<ol style="list-style-type: none"> 1. No diesel fuel 2. Improper diesel fuel 3. Clogged fuel filter 4. Poor fuel injection 5. Compressed air leakage from intake/exhaust valves 	<ol style="list-style-type: none"> 1. Refuel fuel system 2. Replace with recommended diesel fuel 3. Replace fuel filter 4. Contact authorized service facility. 5. Contact authorized service facility.
Starter motor does not operated or rotates too slowly (DIESEL engine can be turned manually)	<ol style="list-style-type: none"> 1. Battery needs charging 2. Faulty cable connection at battery terminals 3. Faulty starter switch 4. Faulty starter motor 	<ol style="list-style-type: none"> 1. Check electrolyte, recharge 2. Clean terminals, retighten 3. Contact authorized service facility. 4. Contact authorized service facility.
Black exhaust smoke (DIESEL engine)	<ol style="list-style-type: none"> 1. Engine overloaded 2. Clogged air cleaner element 3. Improper diesel fuel 4. Faulty spraying of fuel injection 5. Excessive intake/exhaust valve clearance. 	<ol style="list-style-type: none"> 1. Reduce load 2. Clean element or replace 3. Replace with the recommended diesel fuel 4. Contact authorized service facility. 5. Contact authorized service facility.
White exhaust smoke (DIESEL engine)	<ol style="list-style-type: none"> 1. Improper diesel fuel 2. Faulty spray pattern of fuel injection 3. Fuel injection timing delay 4. Engine burning oil 	<ol style="list-style-type: none"> 1. Replace with the recommended diesel fuel 2. Contact authorized service facility. 3. Contact authorized service facility. 4. Contact authorized service facility.

18. Troubleshooting (Continued)


PROBLEM	PROBABLE CAUSE	SOLUTION
No pressure or Low pressure.	<ol style="list-style-type: none"> 1.Spray wand not set to high pressure. 2.Lower water supply. 3.Hose fitting leaks during high pressure. 4.Nozzle obstructed. 5.Water filter screen obstructed. 6.Defective thermal relief valve. 7.Air in hose. 8.Choke lever in choke position. 9.Throttle control lever is not in fast position. 10.High pressure too long. 	<ol style="list-style-type: none"> 1.See "Using Spray Wand" section. 2.Water supply must be 5 GPM @ 20 psi. 3.Tighten hose fitting. Use thread sealant tape if necessary. 5.Remove and clean filter. 6.Call Customer Service: 7.Stop engine and water source. Disconnect water source from pump inlet and turn water source to ON to remove all air from hose. When steady stream of water is present, turn water source to OFF. Re-connect water source to pump inlet and turn on water source. Squeeze trigger to remove remaining air. 8.Move choke to NO CHOKE position. 9.Move throttle control lever from fast position. 10.Use High pressure hose under 100 ft (30M).
No or low pressure (after period of normal use).	<ol style="list-style-type: none"> 1.Worn seal or packing. 2.Worn or obstructed valves. 3.Worn unloader piston. 4.Worn E-Z start valve. 	Have parts cleaned or replaced by authorized dealer.
Pump will not draw Chemicals	<ol style="list-style-type: none"> 1.Spray wand not set to low pressure.. 2.Chemical filter clogged. 3.Chemical screen not in chemical. 4.Chemical solution too thick. 5.Pressure hose too long 6.Chemical build-up in chemical injector. 	<ol style="list-style-type: none"> 1.See "Using Spray Wand" section. 2.Clean Filter. 3.Ensure end of chemical hose is fully submerged into chemicals. 4.Dilute chemical. Chemical solutions should have same consistency as water. 5.Lengthen water supply hose instead of pressure hose. 6.Have parts cleaned or replaced by authorized dealer.
Water leaking at pump.	<ol style="list-style-type: none"> 1.Loose connections. 2.Piston packings worn. 3.Worn or broken O-rings. 4.Pump head or tubes damaged from freezing. 	<ol style="list-style-type: none"> 1.Check and replace O-ring 2.Tighten hose connection. 1.Tighten connections. 2.Have parts cleaned or replaced by authorized dealer. 3.Have parts cleaned or replaced by authorized dealer. 4.Have parts cleaned or replaced by authorized dealer.
Water leaking at spray gun/spray wand connection.	<ol style="list-style-type: none"> 1.Worn or broken O-ring. 2.Loose hose connection. 	<ol style="list-style-type: none"> 1. Check and replace O-ring. 2. Tighten hose connection.
Oil Leaking At Pump And Or Gearbox	<ol style="list-style-type: none"> 1.Oil seals worn. 2.Loose drain plug. 3.Worn drain plug O-ring. 4.Worn fill plug O-ring. 5.Pump overfilled. 6.Incorrect oil used. 7.Vent plug clogged. 	<ol style="list-style-type: none"> 1. Have parts cleaned or replaced by authorized dealer. 2.Tighten drain plug. 3.Inspect and replace O-ring. 4.Inspect and replace O-ring. 5.Check for correct amount. 6.Drain and refill with correct type and amount of oil. 7.Cleanvent plug. Use air hose to free it of blockage. If problem persists, replace vent plug.
Pump pulsates	Nozzle obstructed.	See "Using Spray Wand" section.

19. Pressure Washer Exploded View & Parts List (JN Series)

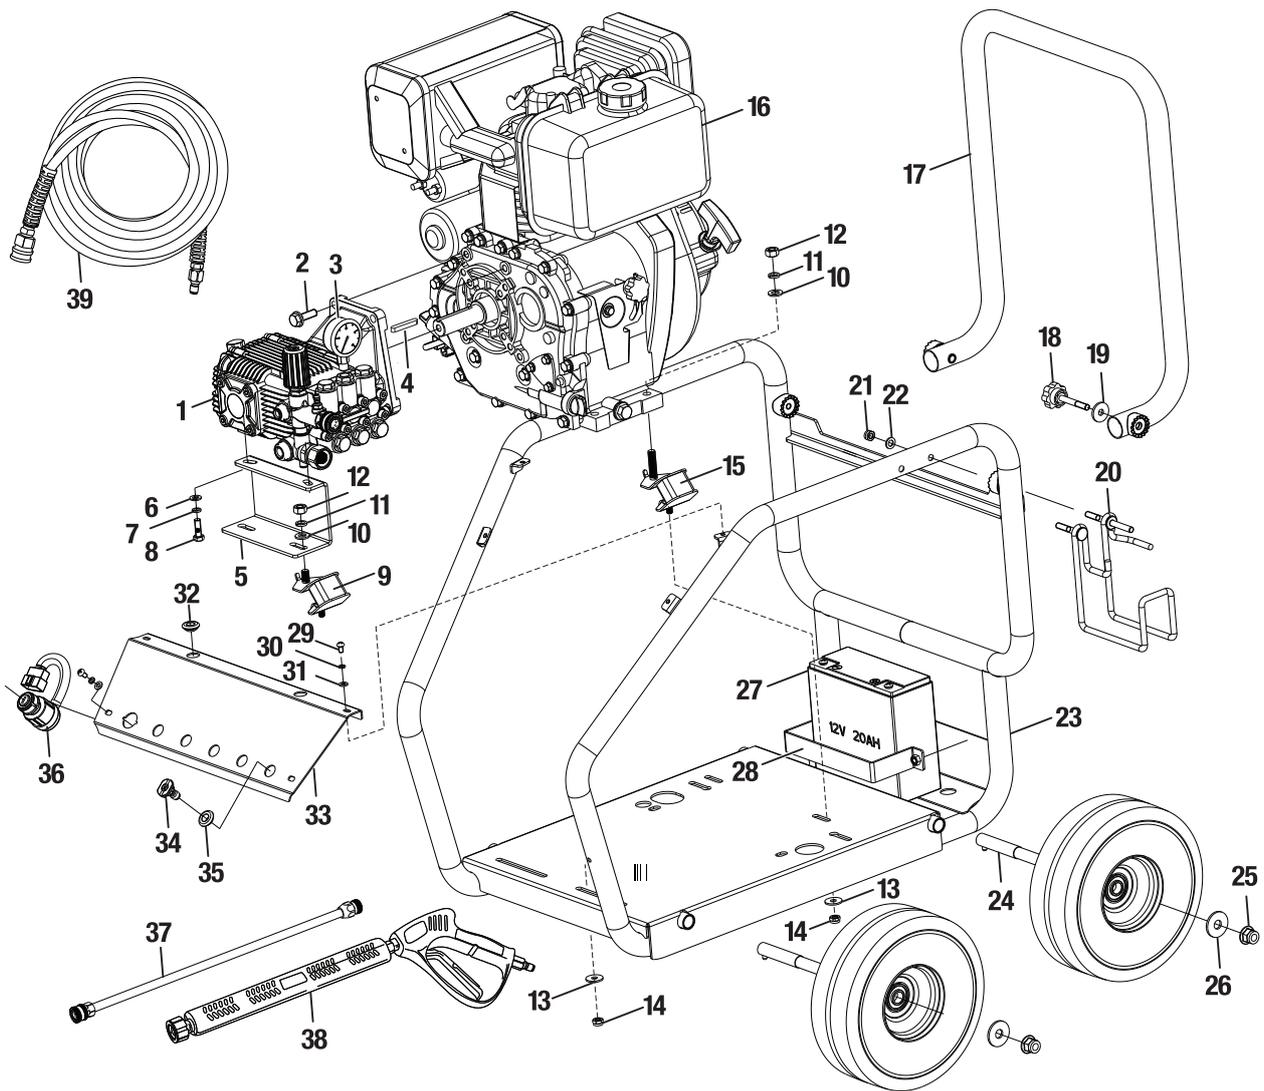


REF NO.	DESCRIPTION	REF NO.	DESCRIPTION	REF NO.	DESCRIPTION
1	Pump	14	Screw Nut	27	Battery
2	Bolt	15	Rubber Feet . Engine	28	Case
3	Pressure Gauge	16	Engine	29	Bolt
4	Key	17	Handle	30	Spring Washer
5	Anti Vibration Holder	18	Handwheel bolt	31	Plain Washer
6	Plain Washer	19	Plain Washer	32	Grommet
7	Spring Washer	20	Hook	33	Frame Face Plate
8	Bolt	21	Screw Nut	34	Nozzle
9	Rubber Feet . Pump	22	Plain Washer	35	Grommet . Nozzle
10	Plain Washer	23	Frame Body	36	Key Start
11	Spring Washer	24	Axle	37	Lance
12	Screw Nut	25	Wheel Fix Lock Nut	38	Gun
13	Plain Washer	26	Plain Washer	39	High Pressure Hose

20. Triplex Pump Exploded View & Parts List

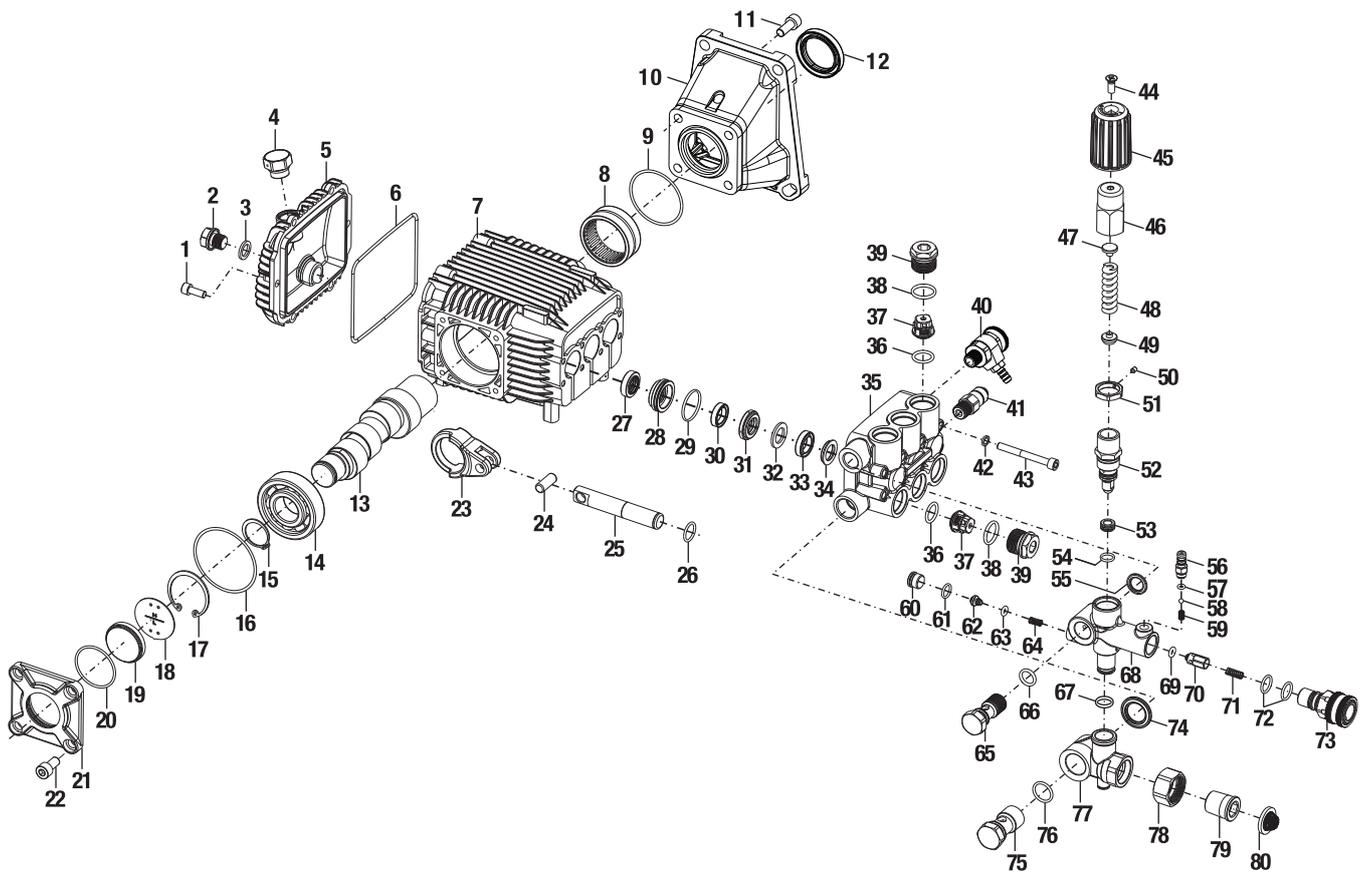

NO.	DESCRIPTION	NO.	DESCRIPTION	NO.	DESCRIPTION
1	Bolt, crankcase cover	28	Locating ring	55	Gasket, unloader valve housing
2	Oil drain plug	29	O-ring, locating ring	56	Detergent injector fitting
3	O-ring, oil drain plug	30	Low pressure water seal	57	O-ring, injector fitting
4	Vented oil cap	31	Compression ring	58	Ball, injector fitting
5	Crankcase cover	32	Compression flake	59	Spring, injector fitting
6	Gasket, crankcase cover	33	High pressure water seal	60	Plug, easy start
7	Crankcase	34	Supporting ring	61	O-ring, plug, easy start
8	Needle bearing	35	Manifold	62	Valve core, easy start
9	O-ring, flange	36	O-ring, checking valve	63	O-ring, valve core, easy start
10	Flange	37	Checking valve assy	64	Spring, easy start
11	Bolt, flange	38	O-ring, valve cap	65	Water outlet banjo bolt
12	Oil seal, flange	39	Checking valve cap	66	O-ring, outlet banjo bolt
13	Crankshaft	40	Outlet plug, manifold	67	O-ring, unloader valve housing
14	Ball bearing	41	Thermal relief valve	68	Unloader valve housing
15	Scrap ring	42	Washer	69	O-ring, outlet checking valve
16	O-ring, crankshaft cover	43	Bolt, manifold	70	Outlet checking valve
17	Retain ring	44	Screw, knob cap	71	Spring, outlet checking valve
18	Oil level plate	45	Plastic knob cap	72	O-ring, outlet fitting
19	Oil sight glass	46	Pressure adjusting knob	73	Quick disconnect outlet fitting
20	O-ring, oil sight glass	47	Upper seat, adjusting spring	74	Gasket, bypass housing
21	Crankshaft cover	48	Pressure adjusting spring	75	Water Inlet banjo bolt
22	Bolt, crankshaft cover	49	Spring seat	76	O-ring, inlet banjo bolt
23	Connecting rod	50	Screw, jam nut	77	Bypass housing
24	Pin	51	Pressure jam nut	78	Swivel nut, inlet connector
25	Ceramic coating plunger	52	Unloader valve assy	79	Body, inlet connector
26	O-ring	53	Valve seat	80	Filter washer, inlet connector
27	Oil seal, plunger	54	O-ring, valve seat		

21. Gearbox Exploded View & Parts List

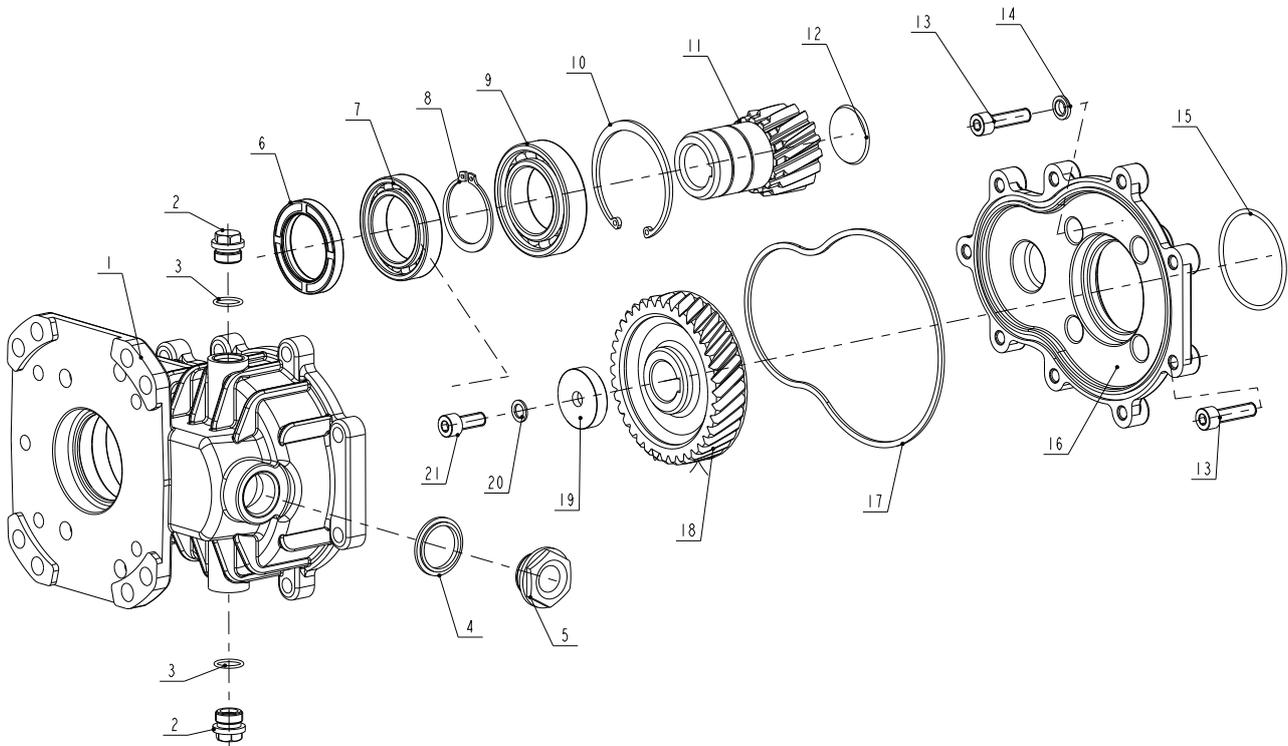

REF NO.	DESCRIPTION	REF NO.	DESCRIPTION	REF NO.	DESCRIPTION
1	Gearbox Case	8	Snap Ring D40	15	O-ring 55.25*2.62
2	Oil Plug	9	Ball Bearing 6008	16	Gearbox Cover
3	O-ring 14.2*1.9	10	Snap Ring D68	17	Gasket.Cover
4	Gasket.Oil Gauge	11	Engine Gear	18	Pump Gear
5	Sight Gauge	12	Blocking Flake	19	Ring
6	Oil Seal	13	Bolt M8*30	20	Washer 08
7	Ball Bearing 61908	14	Combine Washer	21	Bolt M8*20

HIGH PRESSURE WASHER

Electric Start Direct Drive/Gear Reduction Gas/diesel

Operation Instruction And Parts List Manual

Version: 20-EN01

IMPORTANT! SAFETY FIRST!

Before attempting to use this product(s) please read all of the safety precautions and operating instructions outlined in this manual to reduce the risk of damage to the products and personal injury.

COPY RIGHT RESERVED

DANAU INDUSTRIES CO., LTD

<http://en.danau.cn>