

# Stainless Elite PLATE CASTORS



STAINLESS ELITE CASTORS



S4428B



S4415




SUITABLE FOR  
WET ENVIRONMENTS  
FULL STAINLESS  
CONSTRUCTION

S4488B

Diameter (mm)	Width (mm)	Wheel Type	Wheel Code	Bearing Type	Load Capacity	Height (mm)	Swivel Radius	With Brake	Rigid Code	Swivel Code
50	25	Nylon	NY204	Plain	50/40	69	45	N/A	N/A	S258 #
75	30	Poly Nylon	PU3345	SS Ball	80/45	107	70	105	R3383	S3382 #
75	30	Nylon	NY3321	Plain	80/45	107	70	105	R3389	S3388 #
75	32	Rebound Rubber	RR3367	SS Ball	80/45	107	70	105	R3387	S3386 #
75	32	Elastic Rubber	ER3368	SS Ball	80/45	107	70	105	R3315	S3315 #
100	27	Poly Nylon	PU4439	SS Ball	100/80	135	90	106	R4477	S4476
100	30	Nylon	NY4417	Plain	100/80	135	90	106	R4489	S4488
100	32	Rebound Rubber	RR4367	SS Ball	80/45	135	90	106	R4429	S4428 #
100	32	Elastic Rubber	ER4368	SS Ball	80/45	135	90	106	R4416	S4415 #
125	27	Poly Nylon	PU5539	SS Ball	100/80	161	102	106	R5577	S5576
125	30	Nylon	NY5517	Plain	100/80	161	102	106	R5589	S5588
125	32	Rebound Rubber	RR4367	SS Ball	80/45	135	90	106	R4429	S4428 #
125	32	Elastic Rubber	ER5368	SS Ball	80/45	161	102	106	R5516	S5515 #

**BRAKE OPTIONS:** B = Brake D = Directional Lock  
 Castors marked # are not available with directional locks  
 To order castors with Brake or Directional Lock add B or D to end of swivel code e.g. S4476B

Baseplate dimensions & drilling patterns for **Stainless Steel Elite Series** castors

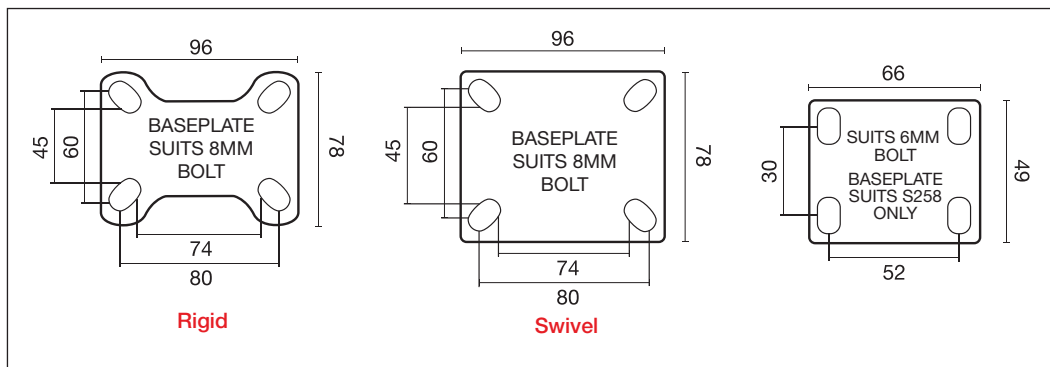

S258