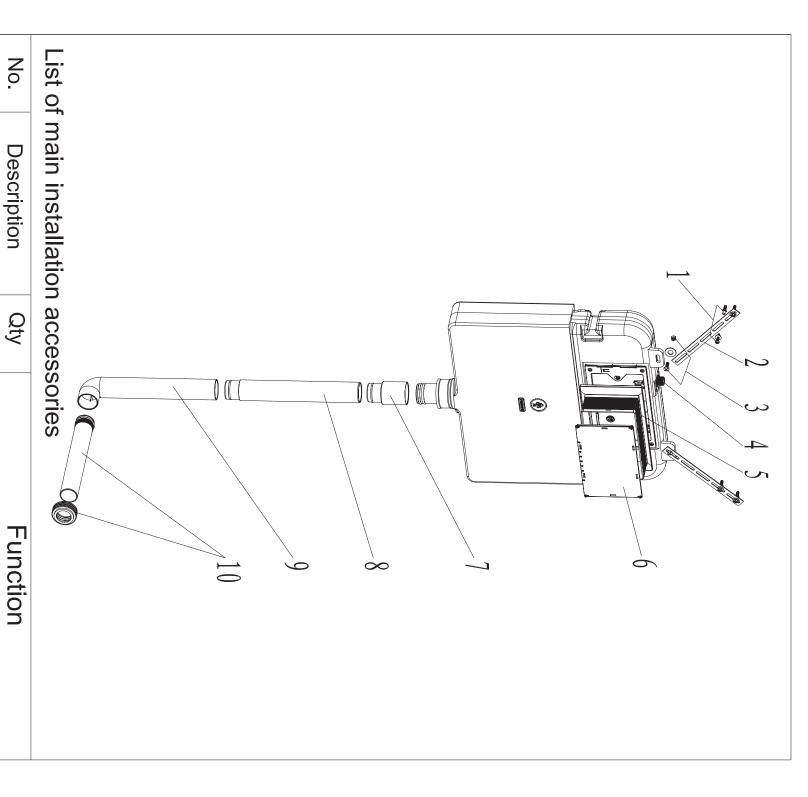
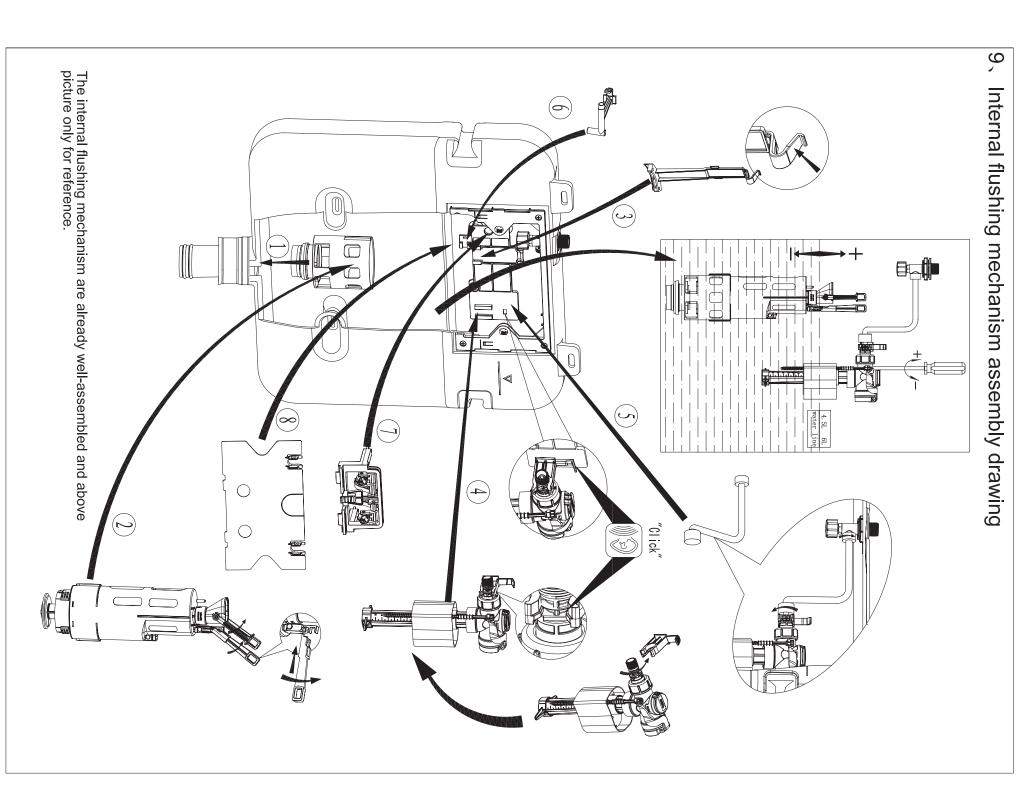

Concealed Cistern
Installation Manual





Straight pipe

Water inlet pipe to squatting pan (cut to customer's request)

To joint cistern into ceramic bowl (cut to customer's request)

Connect the water inlet of tank with straight pipe

To reserve space for installation of actuator at wall building

To prevent dust and impurities into tank at wall building

Adapter

Bending pipe Flushing piping Plastic holder cover

Plastic holder

Angle valve

Fill valve inlet and shut-off

Fixation of concealed cistern

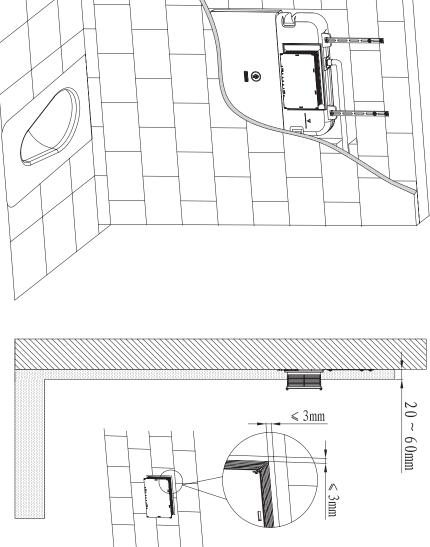
Screws

Iron bracket

Expansion screw

Plastic holder cover (to prevent dust and impurities into tank at wall building) Plastic holder (to reserve space for installation of actuator at wall building)

8、Wall thickness range 20-60mm (from mounting wall surface to finished wall)



Important instruction:

1. Please adhere to the following installation instructions.

We shall not be responsible for failures and loss that are contributed to improper installation.

- 2. Please confirm the fixation location of frame prior to installation and obtain the finished floor surface. Draw FEL on installation wall and follow it as baseline from ZERO (0) level.
- 3. The instructions have been composed based in the latest product specifications.

 We reserve the right to make modifications to the

packaging and specifications without providing prior

notification.

Mount before bricks building. All size unit in MM. Follow the material product, should there is an unconformity with drawing.

NOTES

 $_{\text{FFL}} \stackrel{\emptyset}{\bigtriangledown} = \text{Finished Floor}$

General dimension and water supply drawing

Water supply from top (water supply should be connected to angle valve inside cistern)

