



SPECIFICATION

Security Framed Mirror with Rounded Corners for Front Mounting to wall surface shall be fabricated of one piece formed alloy 18-8 stainless steel, type 304, No 18 gauge with No 8 mirror polish. Installed unit shall project 6mm from wall. Mirror frame shall be provided with six (6) dimpled mounting holes for ¼" flat head screws. Six (6) ¼-20x2" long pin-Torx flat head machine screws shall be supplied for use in installation.

INSTALLATION

Insert six (6) wall anchors (by others) into finished wall to correspond with unit six (6) mounting holes. Mount and secure framed mirror to wall with six (6) ¼-20x2" long pin-Torx flat head machine screws (supplied) to anchors by others, through mounting holes provided in frame.

GLAZING OPTION

For 20 gauge No 8 mirror polish finish specify option by adding suffix to Model No (e.g. 10-107-14).


WARRANTY

One year.

Security Framed Mirror with Rounded Corners shall be Model No 10-107 as supplied by ASI JD MacDonalD.

♿ All ASI JD MacDonalD disabled compliant products when installed must be in accordance with AS1428 to ensure the specified product is complying with all washroom specification requirements.

**Security Framed Mirror
with Rounded Corners -
Front Mounted
Model No. 10-107**

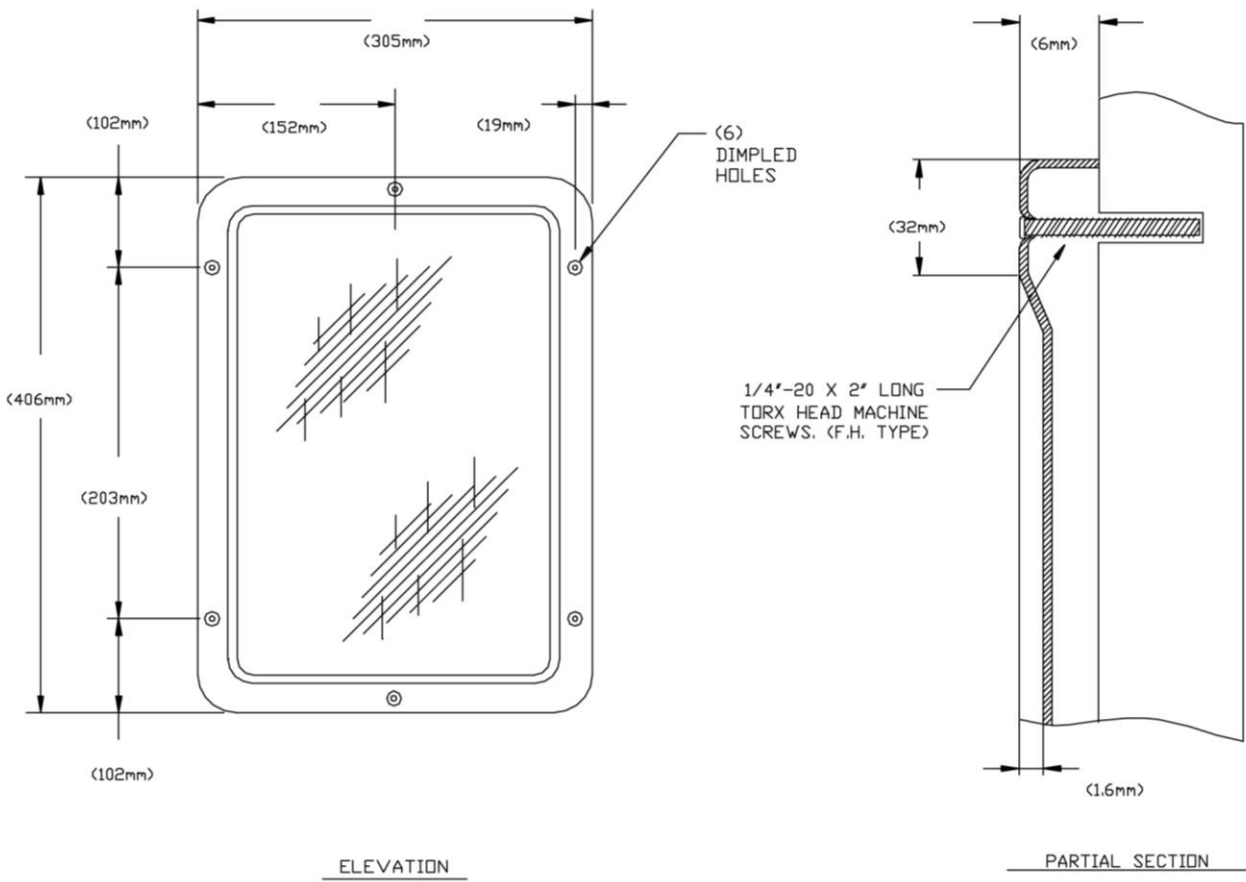

ASI JD MacDonald reserves the right to, and does from time to time, make changes and improvements in design and dimensions. The photographs and line drawings of the products in this flyer are representational only. All dimensions are in millimetres unless otherwise stated.