



SPECIFICATION

Utility Hook Strip shall be type 304 stainless steel alloy 18-8. Mounting channel shall be 20 gauge with top and bottom edges returning 13mm to wall. Heavy duty hooks shall be one piece formed of 14 gauge. All exposed surfaces shall be satin finish. Unit shall be supplied with hooks and mounting holes corresponding with length as per schedule.

Schedule of Availability			
Model	Length	Hook Quantity	Mounting Holes Quantity
10-1307-3	660mm	3	2
10-1307-4	914mm	4	3
10-1307-5	1168mm	5	4
10-1307-6	1422mm	6	4


INSTALLATION


Surface mount unit to wall with No. 10 pan head self-threading screws (by others) through straight mounting holes in strip into suitable anchors, blocking or other wall reinforcements (by others) adequate to carry intended loads on fully utilized hooks.

WARRANTY

One year.

Utility Hook Strip shall be Model No. 10-1307-x as supplied by ASI JD MacDonald.

 All ASI JD MacDonald disabled compliant products when installed must be in accordance with AS1428 to ensure the specified product is complying with all washroom specification requirements.

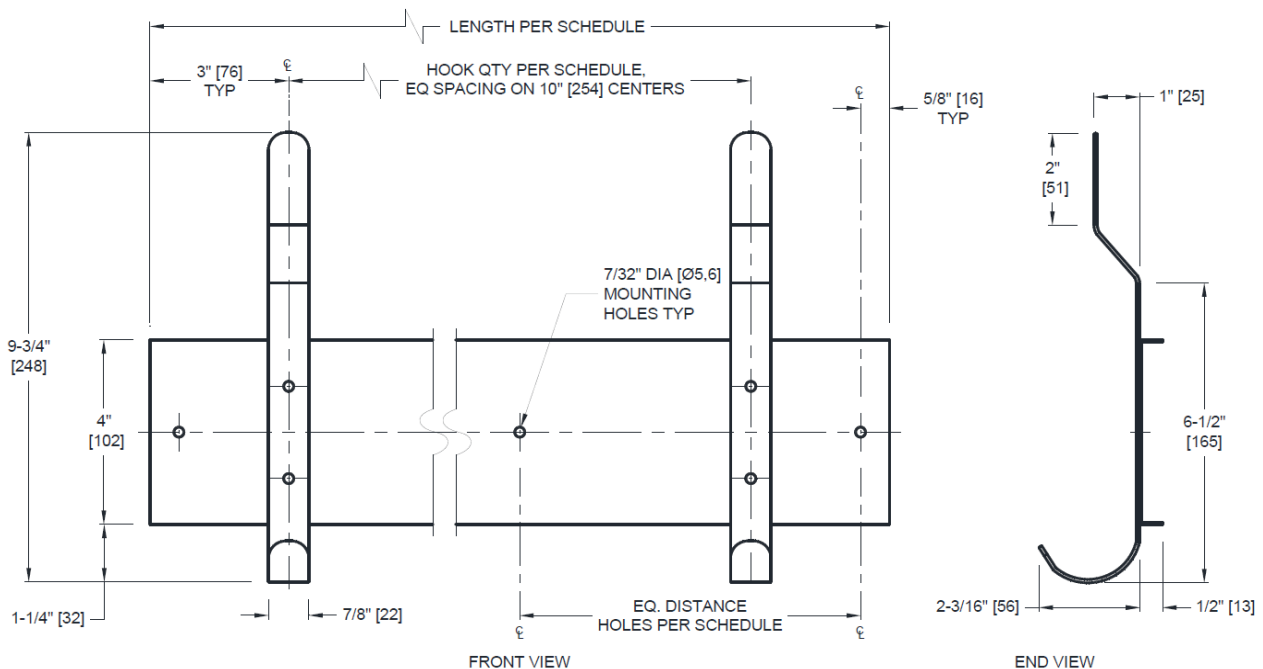

NOTE:

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

ASI JD MacDonald reserves the right to, and does from time to time, make changes and improvements in design and dimensions. The photographs and line drawings of the products in this flyer are representational only. All dimensions are in millimetres unless otherwise stated.