



SPECIFICATION

Single Towel Pin unit shall be fabricated of alloy 18-8 stainless steel, grade 304. Pin post shall be 13mm x 25mm rectangular tubing with formed mounting flange and bracket welded on end. Cap plate shall be 19mm x 38mm welded to outer end. Mounting plate shall be included. A stainless steel set screw shall be provided on bottom perimeter of flange to lock unit to mounting plate. Mounting hardware shall be provided. Surface finish shall be bright or satin as chosen by option.


INSTALLATION



Surface mount unit on wall using No. 10 self tapping screws (supplied by others) through holes provided in mounting plate. Hang post and flange assembly on mounting plate and tighten set screw to lock unit to plate. For mounting height standards refer to current Building Code of Australia for able bodied and/or disabled use.

WARRANTY

One year.

Towel Pin shall be Model No. 10-7301-B (bright finish) or 10-7301-S (satin finish) as supplied by ASI JD MacDonald.

 All ASI JD MacDonald disabled compliant products when installed must be in accordance with AS1428 to ensure the specified product is complying with all washroom specification requirements.

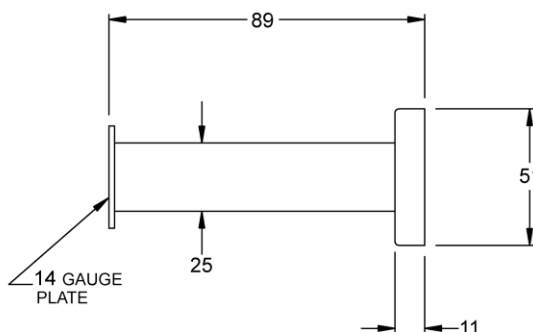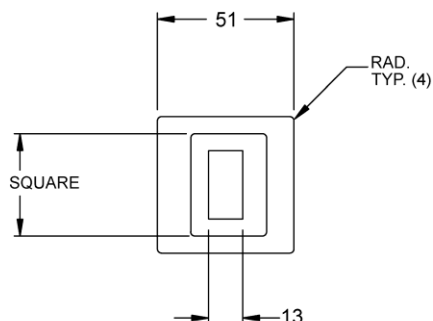

CONCEALED MOUNTING DETAIL

