
OL105
Overlapping Lift Off Spring Hinge

Dimensions: 86mmH x 93mmW x 35mmD



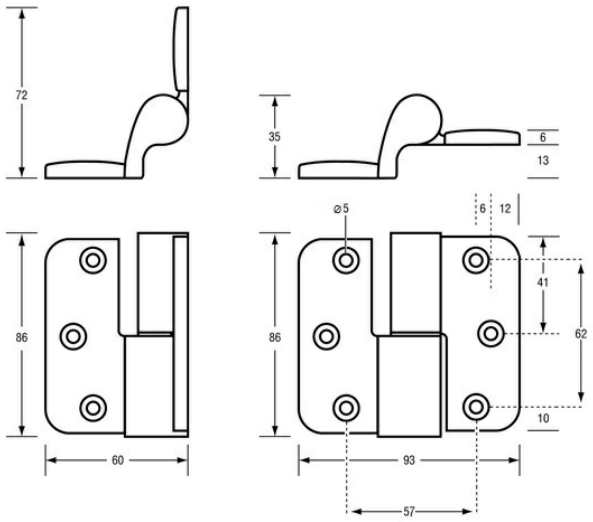

SPECIFICATION

Material	Diecast Zinc, Brass Shaft, Nylon Inserts, ABS Snap-On Covers
Finish	Satin Chrome Plate
Mounting	Screw Fix or Bolt Through 13mm Screw Fixings Supplied 18mm+ Fixings Supplied if adding 18mm or 33mm Spaces (OL105-SPACER) Suits 13mm board For 18mm or 33mm board please add **OL105 Spacer**
Minimum Hinge Clearance For Lift-Off Hinges	40mm
Load Rating	15Kg per hinge For optimum performance - 2 hinges per door up to 30Kgs For doors over 30Kg allow for 15Kg per hinge Note: 3 Hinges per door is recommended to prevent door bowing

NOTES

Please specify at the time of ordering:

- OL105_13LH_HC: Left Hand, Hold Closed - Assists the door to move towards a Hold Closed Position
- OL105_13LH_HO: Left Hand, Hold Open - Assists the door to move towards a Hold Open Position
- OL105_13RH_HC: Right Hand, Hold Closed - Assists the door to move towards a Hold Closed Position
- OL105_13RH_HO: Right Hand, Hold Open - Assists the door to move towards a Hold Open Position

- For 18mm or 33mm board, add **OL105_18** or **OL105_33** Spacers.
- For Bolt Through use **105C_FACEPLATE_SCP** Concealed Fix Face Plate.
- For Metlam Australia Care and Maintenance Guidelines, Installation Instructions, Product Specifications, and Warranty Details, please refer to the Product User Guide Tab.

For more in depth information, visit the product online: https://metlam.com.au/category/hinges/OL105

The photographs and line drawings of the products presented above are representational only. Metlam Australia Pty Ltd reserves the right to, and from time to time, make changes and improvements to design and dimensions.