

D-Pull handles

316 grade stainless steel

dormakaba D-Pulls are constructed from 316 grade stainless steel.

The 16mm diameter handle is the perfect measurement for use on utility cupboards, commercial toilet door airlocks and many other applications.

Complying with AS1428.1 which requires hand clearance of between 35mm and 45mm.

D-Pulls are supplied with two M5 x 60mm fixing screws and are available in two lengths being 150mm and 200mm.



D-Pull
150mm h x 16mm dia

H15SSS

D-Pull
200mm h x 16mm dia



H20SSS

Screw Pack

M5 screws + threaded studs

The 35mm M5 screw, sold separately in the extended screw pack, suits 45mm to 60mm thick doors.

Standard 25mm M5 screws are included with all concealed fixed plates and suit 35mm to 45mm thick doors.

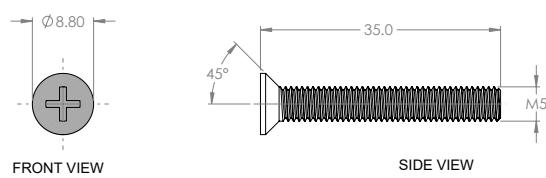

ISOMETRIC VIEW