

IS7110si



The IS7110si is a compression type perimeter seal, designed to be fitted to an existing door stop, around the head and jambs of single swing doors.

Gap size

- Min. 0mm / max. 7mm

Door set standard lengths

- Single: 1 x 1000mm, 2 x 2100mm
- Long Single: 1 x 1000mm, 2 x 2750mm
- Double: 3 x 2100mm
- Long Double: 1 x 2100mm, 2 x 2750mm


Standard lengths



- 1000mm
- 2250mm
- Also available in: 250mm increments from 1000mm to 5000mm

Standard colours

- Silver anodised aluminium with grey silicone gasket and grey cover strip
- Black anodised aluminium with black silicone gasket and black cover strip

Approval/s

- Fire tested to AS1530 Part 4 in accordance with AS1905 Part 1
-  Certifications GVI1.R26629, GVWZ.R26629, GVWZ7.R26629
- Acoustically tested in accordance with AS1191, ISO140.3 and ISO10140-2

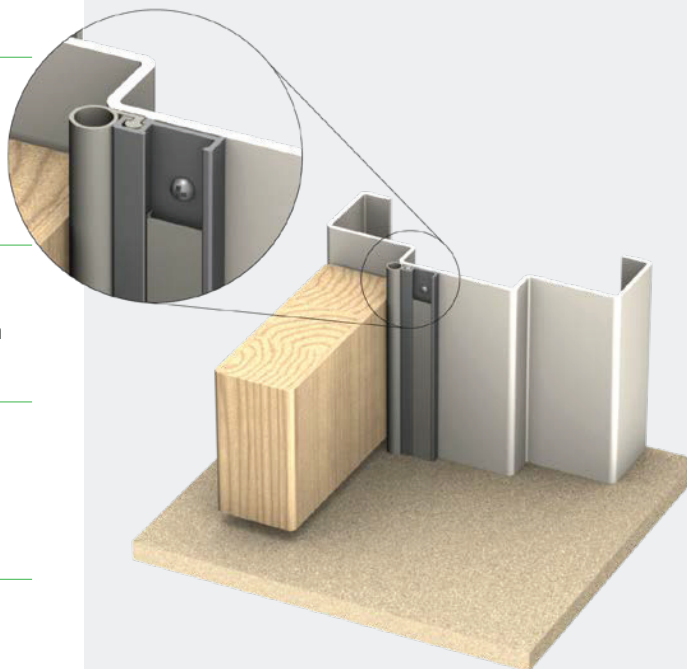

Kilargo IS7110si | Last edit 10/04/2018

15 Wentworth Pl, Banyo QLD 4014, Australia
P +61 7 3635 5000 F +61 7 3861 9266 E sales@kilargo.com.au W kilargo.com.au