



LAS1212 & LAS1515 Batwing® Seals

Medium Duty



LAS1212
Batwing®



LAS1515
Batwing®



Description

The Lorient Batwing® series is primarily designed to contain sound and restrict the spread of medium temperature smoke around hinged door assemblies. Their symmetrical design and unique curved sealing fins provide outstanding performance benefits.

Key benefits

Seals restrict the spread of medium temperature smoke (200°C).

Highly effective acoustic seal that can be retrofitted to existing door assemblies.

Low friction curved elastomeric fins spring back to original shape to provide continuous performance. Discreetly positioned in frame rebate to provide a fully concealed sealing solution.

Simple peel-and-stick installation, our aggressive self-adhesive backing is tested on many surfaces to ensure seal longevity.

Seal surface and fins contain anti-microbial additives to restrict bacterial growth.

Approvals

Fire: Tested in accordance with AS1530.4 on proprietary AS1905.1 fire door assemblies for up to 4 hour rating.

Smoke: AS1530.7 smoke test data on AS6905 compliant smoke door assemblies.

Sound: Acoustically tested in accordance with ISO10140-2 and AS/NZS717.1 with ratings up to 39Rw on appropriate rated assemblies.

Durability: Long term mechanical test, completing 1,000,000 cycles without failure.

Standard lengths

1m, 2.1m and 2.75m.

Single doorset pack (SDP): (1 x 1m, 2 x 2.1m)

Long single doorset pack (LSDP): (1 x 1m, 2 x 2.75m)

Double doorset pack (DDP): (3 x 2.1m)

Long double doorset pack (LDDP): (1 x 2.1m, 2 x 2.75m).

Fixing method

Aggressive film backed self-adhesive.

Gap sizes

LAS1212 – 2-3mm.


LAS1515 – 3mm.

Finishes

Standard colours: Black and clear.

White, grey and brown available to special order.

(Note: Clear does not restrict light penetration).

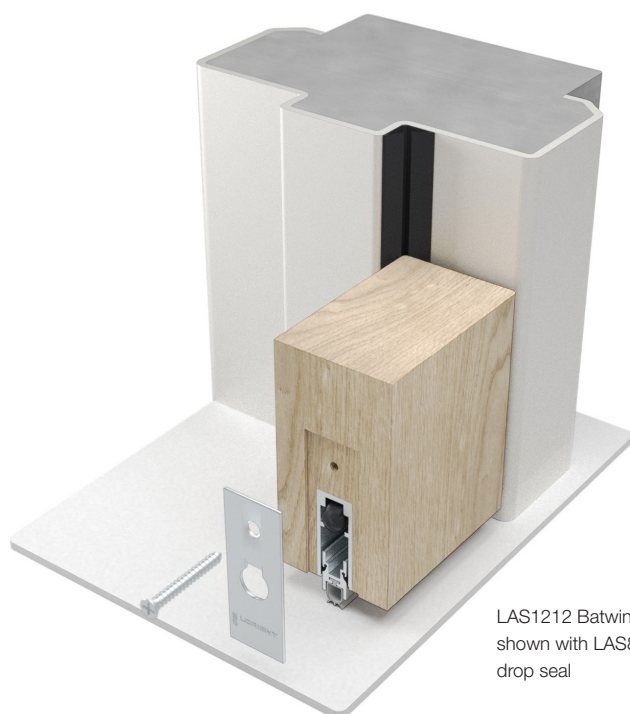

LAS1212 Batwing®
shown with LAS8001 si
drop seal