

LAS3004 si Door Bottom Seal

Heavy Duty



Description

A heavy duty sweep action door bottom seal.

Key benefits

Hard wearing and durable seal.

Slim-line, aesthetic design.

Seal screw-fixed.

Suitable for BAL 40, BAL FZ Bushfire sealing requirements.

Approvals

Fire: Approved for use on proprietary AS1905.1 fire doors for up to 4 hour fire rating.

Smoke: Conforms with BCA Specification C3.4 smoke sealing requirements.

Durability: Long term mechanical test, completing 1,000,000 cycles without failure.

Standard lengths

1m and 2.1m. Other lengths to special order.

Fixing method

Fixing screws supplied.


Fixing holes are pre-drilled and slotted to allow the seals to be adjusted and positioned accurately.

Gap sizes


10mm/22mm.

Finishes

Silver anodised aluminium with grey cover strip and grey silicone rubber blade.

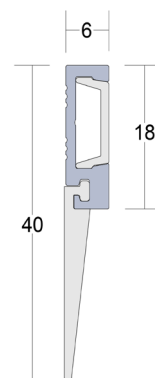

LAS3004 si

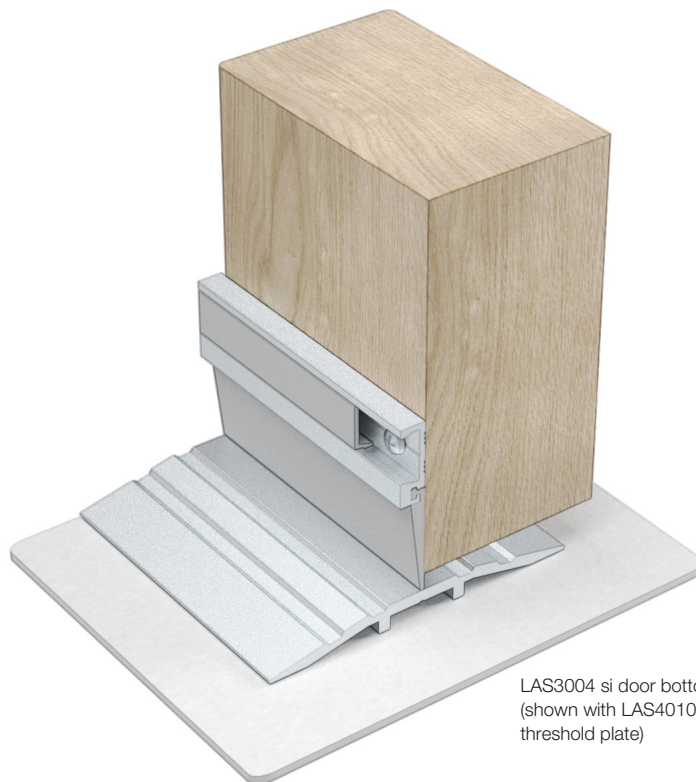

LAS3004 si door bottom
(shown with LAS4010
threshold plate)