

LAS9050 & LAS9070 Hingeguard and Fingerguard Seals

Medium Duty







Description

Trapping fingers in hinged doors can cause horrendous injuries. The risk is especially high in locations where young children are present. The finger guard seals provide a shield.

Key benefits

Protection may be provided by using the LAS9050 on the hinge knuckle side and the LAS9070 to the reveal side.

LAS9070 includes unique, integral acoustic sealing fins and may be used in conjunction with the LAS7001 si and LAS8001 si to create a comprehensive acoustic sealing and finger protection system.

Tested over 200,000 full opening and closing cycles without any sign of degradation.

Standard lengths

2.1m. Other lengths to special order. Single doorset packs are available containing 1 x 2.1m LAS9050 and 1 x 2.1m LAS9070.

Fixing method


Fixing screws are supplied. Fixing holes are pre-drilled and slotted to allow the seals to be adjusted and positioned accurately. A PVC cover strip to conceal fixings is supplied.

Finishes

Supplied with black gasket and grey cover strip.



LAS9050 Hingeguard

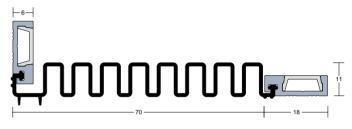

LAS9070 Fingerguard

