

Hinges



General Information

The 100 Series Architectural Hinges are designed to provide an effective solution to hanging doors where there is a need for high grade, architectural quality hinges. These hinges are suitable for use on aluminium or steel glazed doors and solid core timber doors. Many of them can also be used on fire doors.

Lockwood Warranty

Selection of the appropriate hinge for the application is critical to ensure the longevity of the hinge and customer satisfaction. The Lockwood warranty is only applicable for hinges that are installed in accordance with the recommendations of the hinge selection table on page 15.

Hinge Height and Width

When reading dimensions, the first figure always indicates the hinge height and the second indicates the width, eg. 100 mm x 75 mm. The door thickness and door jamb width (also trim size if applicable) determine the width of the hinge required. The width is measured across the leaves when the hinge is fully opened as shown in Diagram 1.

Security

Fixed pin hinges should be used on exterior doors or doors opening out. Also, doors made of particle should have a capped tongue edge strip framing the door, so that hinges can be screwed into solid material.

Hinge Maintenance

The maintenance free hinges in the Lockwood 100 Series Architectural Hinge range are the Severe Duty Butt Hinges with the phosphorous bronze bushes (Part numbers LW10000SDSSS and LW10075SDSSS). These Severe Duty Butt Hinges are self-lubricating.

The remainder of the Lockwood 100 Series Architectural Hinge range are greased hinges which are fit for purpose in many applications. The grease is fundamental to the durability of the product. However, with use it is possible for some grease to seep out onto the surface of the hinge and if left unchecked can lead to door, frame, wall or floor staining in extreme cases.

To prevent this from happening, greased hinges should be monitored and cleaned externally during their life.

In environments where hygiene is critical such as hospitals and food facilities or where hinge maintenance is not a priority, the Lockwood Severe Duty Butt Hinges are highly recommended.

Finishes

Satin Stainless Steel **SSS**
Polished Stainless Steel **PSS**
Satin Chrome **SC**
Matte Black **MBK** (limited range only)

Number of Hinges Per Door

For doors up to 2,100mm high, at least 3 hinges should be used if the Adjusted Door Weight is over 20kg. If the Adjusted Door Weight is 20kg or less, 2 hinges can be used. For doors over 2,100mm high, at least 4 hinges should be used. The method for establishing the Adjusted Door Weight is given on Page 13.

Fire Rated

Please refer to the Hinge Selection Table on page 13 for hinge fire rating information.

Door Stops

It is recommended a door stop be installed to ensure that the door has a positive backstop at the degree of opening selected. It is essential to use a door stop where design factors of the building necessitate opening out of external doors and no windbreak is provided.

Hinge Selection

Prior to selecting a suitable hinge, the Adjusted Door Weight needs to be calculated. The Adjusted Door Weight takes into account the extra stresses that door closers and wider doors place on the hinges and is used to select the appropriate hinge from the table below. Please refer to Page 15 for calculation of the Adjusted Door Weight.

Hinges

Calculating the Adjusted Door Weight.

Establish the weight of door including all door furniture, metal plates and windows. If you have a door closer, add 20% to the door weight.

If the door closer has back-check, add 75% to the door weight, instead of the 20% above.

For door width over 950mm:

951mm to 1050mm, add 10% to door weight.

1051mm to 1150mm, add 20% to door weight.

1151mm to 1250mm, add 30% to door weight.

Therefore, Adjusted Door Weight = (total weight of the door) + (% for door closer/back-check) + (% for any width over 950mm) Please refer to lockweb.com.au/hinge-calc for the online Hinge Adjusted Weight Calculator.

Hinge Selection Table

This Hinge Selection Table has been developed to assist in hinge selection for doors in commercial applications where frequent use is anticipated (eg hospitals, schools, universities, offices and public buildings). In applications where it is reasonable to anticipate less frequent use

(eg apartment entry doors) the maximum adjusted door weight becomes less relevant and as such the complete range of Lockwood hinges can be relied on to provide trouble free service.

Hinge Part Number	Hinge Size (mm)	Description	*Finish	Type	*Material	Maximum Adjusted Door Weight (kg)	Fire Rating
LW10075RLSSS	100x75x2.5	Right Hand Lift Off	SSS	Lift Off Hinge	SS	50	None
LW10075LLSSS		Left Hand Lift Off					
LW10075RLMBK		Right Hand Lift Off	MBK				
LW10075LLMBK		Left Hand Lift Off					
LW10000BBPSS	100x100x2.5	Ball Bearing	PSS	Butt Hinge	SS	60	These Lockwood hinges have been successfully tested up to four hours (depending on type of doorset) on fire door assemblies in accordance with Australian Standard AS 1905.1-2005, Part 1: Fire Resistant Doorsets.
LW10000BBS	100x100x2.5	Ball Bearing	SSS				
LW10000BBMBK	100x100x2.5	Ball Bearing	MBK				
LW10075BBPSS	100x75x2.5	Ball Bearing	PSS				
LW10075BBS	100x75x2.5	Ball Bearing	SSS				
LW10075BBMBK	100x75x2.5	Ball Bearing	MBK				
LW10000FPPSS	100x100x2.5	Fixed Pin	PSS				
LW10000FPSS	100x100x2.5	Fixed Pin	SSS				
LW10075FPPSS	100x75x2.5	Fixed Pin	PSS				
LW10075FPSS	100x75x2.5	Fixed Pin	SSS				
LW10000LPPSS	100x100x2.5	Loose Pin	PSS				
LW10000LPSS	100x100x2.5	Loose Pin	SSS				
LW10075LPPSS	100x75x2.5	Loose Pin	PSS				
LW10075LPSS	100x75x2.5	Loose Pin	SSS				
LW10075LPMBK	100x75x2.5	Loose Pin	MBK				
LW10000BBSC	100x100x2.5	Ball Bearing	SC	Butt Hinge	MS	60	These Lockwood hinges have been successfully tested up to four hours (depending on type of doorset) on fire door assemblies in accordance with Australian Standard AS 1905.1-2005, Part 1: Fire Resistant Doorsets.
LW10075BBSC	100x75x2.5	Ball Bearing					
LW10000FPSC	100x100x2.5	Fixed Pin					
LW10000LPSC	100x100x2.5	Loose Pin					
LW10075LPSC	100x75x2.5	Loose Pin					
LW10000BBHDSS	100x100x3.0	Heavy Duty	SSS	Heavy Duty Butt Hinge	SS	70	These Lockwood hinges have been successfully tested up to four hours (depending on type of doorset) on fire door assemblies in accordance with Australian Standard AS 1905.1-2005, Part 1: Fire Resistant Doorsets.
LW10000SDSS	100x100x3.0	Severe Duty	SSS	Severe Duty Butt Hinge	SS	120	
LW10075SDSS	100x75x3.0						

*Legend:

SS=Stainless Steel

MS=Mild Steel

SSS=Satin Stainless Steel finish


PSS=Polished Stainless Steel finish

SC=Satin Chrome finish


MBK = Matte Black

Hinges


Typical Applications

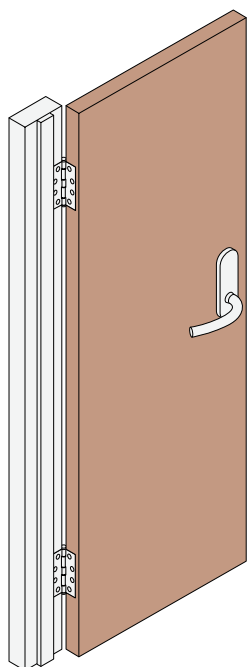

Typical internal doors

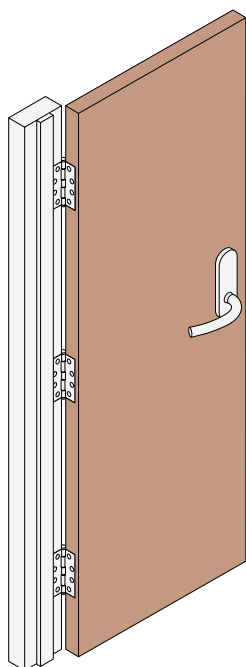

Typical external or high usage doors

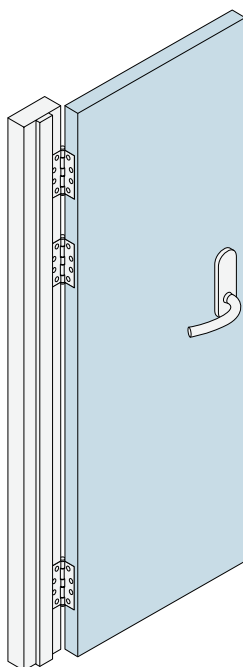

Typical heavy doors

Hinge Throw Selection



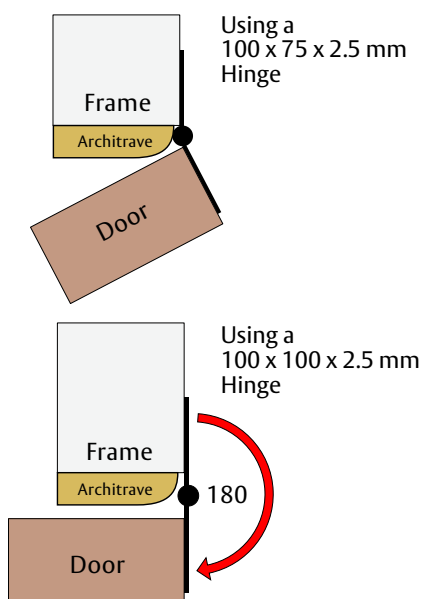


Diagram 1

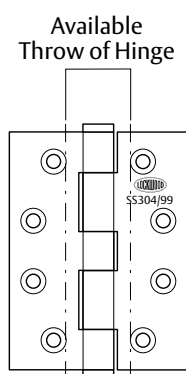

Hinges

Stainless Steel Ball Bearing Hinges

Satin Stainless Steel/Polished Stainless Steel/Button Tipped Hinge

Suitable for interior/exterior doors where a durable, architectural ball bearing hinge is required, or when being used in conjunction with a door closer.


- Two ball bearings
- Manufactured from 304 stainless steel
- Available fixed pin only
- Metric sizes
- Standard metric hole pattern

Sizes: 100 x 75 x 2.5 mm,
100 x 100 x 2.5 mm
and 100 x 100 x 3.0mm


Thickness: 2.5 mm and 3.0mm

Screws: Stainless Steel Screws
supplied with each hinge 10
Gauge x 30mm Wood Screws
x 8 M5 12mm Metal Thread
Screws x 4

Pack Size: 30 (and 18 for the 3.0mm
thick hinge)



LW10075BBPSS



LW10000BBSS



**LW10075BB & LW10000BB now available in
Matte Black**

Stainless Steel Hinges

Satin Stainless Steel/Polished Stainless Steel/Button Tipped Hinge

Suitable for interior/exterior doors where a durable, architectural hinge is required.


- Manufactured from 304 stainless steel
- Available fixed and loose pin
- Metric sizes
- Standard metric hole pattern

Sizes: 100 x 75 x 2.5 mm
and 100 x 100 x 2.5 mm


Thickness: 2.5 mm

Screws: Stainless Steel Screws
supplied with each hinge
10 Gauge x 30mm Wood
Screws x 8 M5 x 12mm Metal
Thread Screws x 4

Pack Size: 30



LW10075LPSS



LW10000FPPSS



LW10075LP now available in Matte Black

Hinges

Mild Steel Ball Bearing Hinges

Suitable for general purpose interior/ exterior doors where a standard ball bearing hinge is required or when being used in conjunction with a door closer.

- Manufactured from high grade steel
- Available fixed pin only
- Metric sizes
- Standard metric hole pattern



Sizes: 100 x 75 x 2.5 mm
and 100 x 100 x 2.5 mm

Thickness: 2.5 mm

Screws: Zinc Plated Mild Steel Screws
supplied with each hinge
10 Gauge x 30mm Wood
Screws x 8 M5 x 12mm Metal
Thread Screws x 4

Pack Size: 30

Finish: Satin Chrome



LW10000BBSC



Mild Steel Hinges

Suitable for general purpose interior/ exterior doors where a standard hinge is required.

- Manufactured from high grade steel
- Available fixed and loose pin
- Metric sizes
- Standard metric hole pattern



Sizes: 100 x 75 x 2.5 mm
and 100 x 100 x 2.5 mm

Thickness: 2.5 mm

Screws: Zinc Plated Mild Steel Screws
supplied with each hinge
10 Gauge x 30mm Wood
Screws x 8 M5 x 12mm Metal
Thread Screws x 4

Pack Size: 30

Finish: Satin Chrome



LW10000LPSC



Hinges

Stainless Steel Bushed Bearing Hinges (Severe Duty)

High performance bushed bearing butt hinges suitable for severe duty applications.



- Manufactured from 304 stainless steel
- Available in fixed pin only
- Metric sizes

Sizes: 100 x 100 x 3.0mm
and 100 x 75 x 3.0mm

Screws: Stainless Steel Screws supplied with each hinge. 10 Gauge x 30mm Wood Screws x 8
M5 x 14mm Metal Thread Screws x 4

Pack Size: 36

Finishes: Satin Stainless Steel
Matte Black



LW10075SDSSS



Lift Off Stainless Steel Hinges

Suitable for where a door may need to be lifted off after installation


- Available in left and right hand versions
- Manufactured from 304 stainless steel
- Metric sizes

Sizes: 100 x 75 x 2.5mm

Screws: Stainless Steel Screws supplied with each hinge. 10 Gauge x 30mm Wood Screws x 8
M5 x 12mm Metal Thread Screws x 4

Pack Size: 30

Finishes: Satin Stainless Steel
Matte Black



LW10075LLSSS



LW10075LR/LL now available in Matte Black

Hinges

Fast Fix Stainless Steel Ball Bearing Hinge

Ideal for general purpose interior/ exterior use where aluminium frames/ doors are used.


- Two ball bearings
- Manufactured from 304 stainless steel
- Available fixed pin only
- Metric sizes

Sizes: 100mm x 70mm x 2.5mm

Thickness: 2.5 mm

Screws: Stainless Steel Screws
supplied with each hinge
10 Gauge x 30mm Wood
Screws x 6 M5 x 12mm Metal
Thread Screws x 6

Pack Size: 30

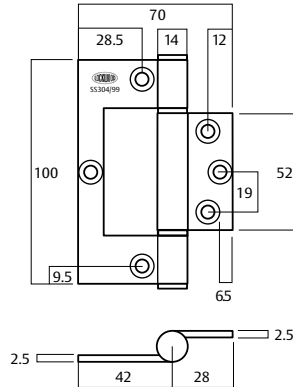

LW10070BBFFSSS



Fast Fix Stainless Steel Ball Bearing Hinge

Ideal for general purpose interior/ exterior use where timber frames/ doors are used.


- Two ball bearings
- Manufactured from 304 stainless steel
- Available fixed pin only
- Metric sizes

Sizes: 100mm x 70mm x 2.5mm

Thickness: 2.5 mm

Screws: Stainless Steel Screws
supplied with each hinge
10 Gauge x 32mm Wood
Screws x 7 M5 x 12mm Metal
Thread Screws x 7

Pack Size: 30

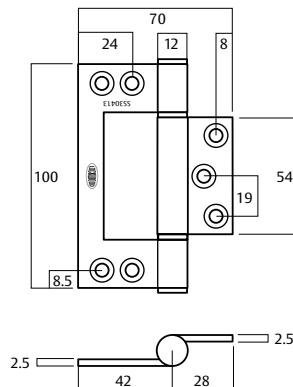

LW10070BBFFSSA



Hinges

AH130 Fast Fix Aluminium Hinge

The Lockwood AH130 is a heavy duty fast fix hinge with face fix flanges to suit aluminium commercial door applications.

Heavy duty, bi-directional face fix locator flanges allows for faster installation.

Installation Guide

- Minimum door thickness 40mm
- Up to 2100mm high x 900mm x 100kg – 3 hinges
- Up to 2400mm high x 900mm x 100kg – 4 hinges


Fixing

- Heavy duty bi-directional fixing
- Face fix locator flange allows for faster installation
- Supplied with 11 of 10G x 12mm, 304SS undercut countersunk self tapping (AB) Phillip drive screws

Technical Specification

- Hinge: 6063-T6 alloy
- Hinge Pin: 6mm 304 grade Stainless Steel
- Nylon bushes
- Squareline heavy duty knuckles
- Interference pressed fit aluminium end caps


Overall dimensions

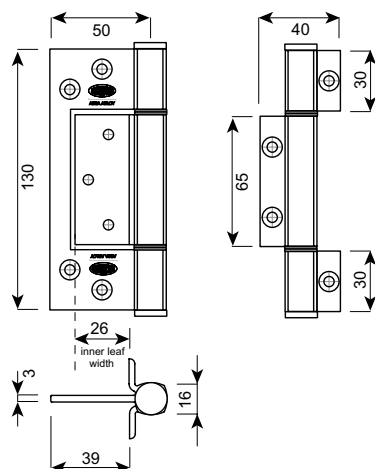

AH130CAN



Screw hole fixing dimensions

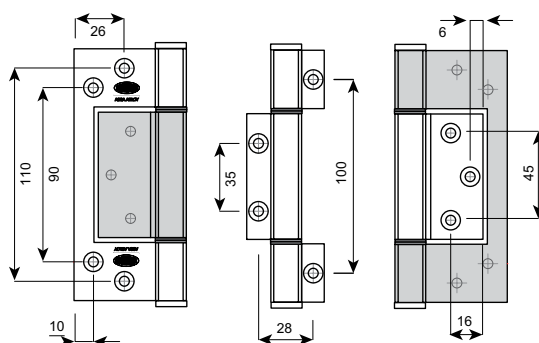

AH130 Fast Fix Aluminium Hinge

Finish	Packaging	Part Number
Clear Anodised	Trade	AH130CAN
Black Powdercoat	Trade	AH130BLK
White Powdercoat	Trade	AH130WH
Silver Powdercoat	Trade	AH130SIL

Hinges

AH130T Timber/Aluminium Fast Fix Hinge

The AH130T Fast Fix Hinge is heavy duty commercial hinge which ideally suits both timber and aluminium doors with aluminium frames.

Installation Guide

- Minimum door thickness 40mm
- Up to 2100mm high x 900mm wide x 80kg = 3 hinges
- Up to 2400mm high x 900mm wide x 80Kg = 4 Hinges


Fixing

- Heavy Duty bi-directional fixing
- Supplied with:
 - 7 of 10G x 12mm 304SS Undercut Countersunk Self Tapping (AB) Phillip Drive Screws
 - 3 of 10G x 32mm 304SS Undercut Countersunk Self Tapping (AB) Phillip Drive Screws
- Integrated locator step aids in alignment and installation


Technical Specification

- Hinge: 6063-T6 Alloy
- Hinge Pin: 6mm 304G Stainless Steel
- Nylon Bushes
- Squareline Heavy Duty Knuckles
- Interference Pressed Fit Aluminium End Caps


Overall dimensions



AH130TSIL



Screw hole fixing dimensions

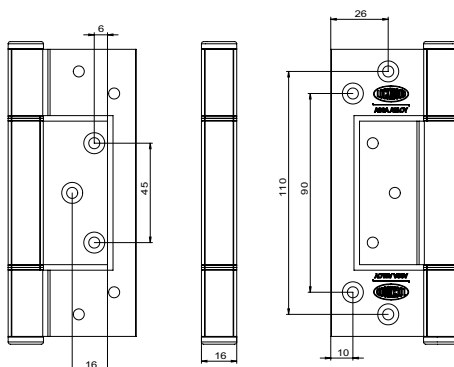

AH130T Fast Fix Aluminium Hinge

Finish	Packaging	Part Number
Clear Anodised	Trade	AH130TCAN
Black Powdercoat	Trade	AH130TBLK
White Powdercoat	Trade	AH130TWH
Silver Powdercoat	Trade	AH130TSIL



Hinges

Vivid® Collection Loose Pin Hinges

The Lockwood Vivid® Collection Loose Pin Hinges are suitable for regular internal doors, as they make it easier to remove the door from the frame for maintenance purposes. Additionally, they offer the convenience of quickly removing internal doors to accommodate the installation or removal of large furniture pieces or appliances.

These hinges are made from 304 stainless steel and have a typical metric pole pattern. Available in three colours, they can be coordinated with other products in the Vivid® Collection.

Overall dimensions

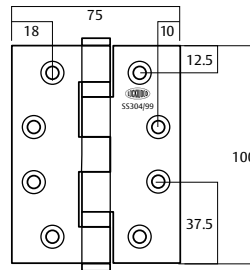

Loose Pin Hinges

Part Number	Finish	Description	Hinge Size (mm)	Type	Material	Maximum Adjusted Door Weight (kg)	Fire Rating
VIVLP/SBPVD	PVD Satin Brass	Loose Pin	100 X 75 X 2.5	Butt Hinge	304SS	60	None
VIVLP/BZPVD	PVD Satin Bronze	Loose Pin	100 X 75 X 2.5	Butt Hinge	304SS	60	None
VIVLP/GMPVD	PVD Satin Gun Metal	Loose Pin	100 X 75 X 2.5	Butt Hinge	304SS	60	None

Screws: Each Hinge comes with 8x M5x32 Wood Screws and 8x M5x12 Metal Thread Screws

Pack size: 30