

3010 series

Push and pull plate furniture

Concealed and visible fix stainless steel push and pull plates for fixing back to back through the door.

Applications

Schools, hospitals, kitchen facilities, toilet airlock entries, pivot doors, cupboards and other commercial applications.

Features

Stainless steel plates 2mm in thickness with 15mm radius corners eliminating sharp corners often associated with square cornered plates.

Door Thickness

Screws suit door thickness up to 60mm as standard. Plates requiring extended fixing screws are available on application. Pull handles supplied on their own are suitable for door thickness to 50mm

Plate Size

300 x 100mm x 2mm

Pull Handle Size


150mm centres x 16mm diameter

200mm centres x 16mm diameter

Pull handles can be ordered separately and supplied with fixing bolts for doors up to 50mm thick

Finish

Satin stainless steel

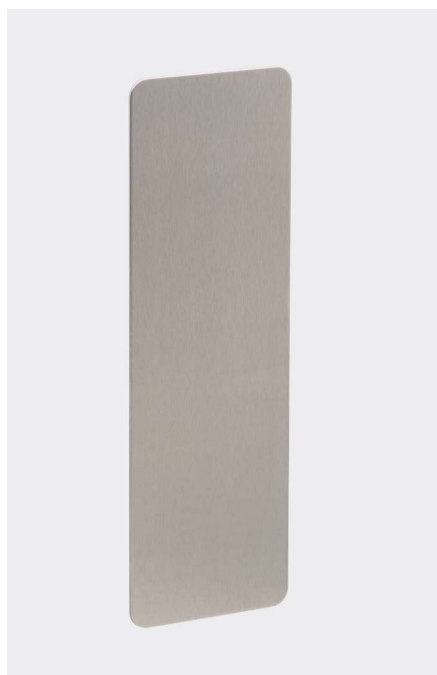

3010CSSS



3010C-H15SSS




3010C-H20SSS

3010 series

Functions

Push Plate

3010 push plate

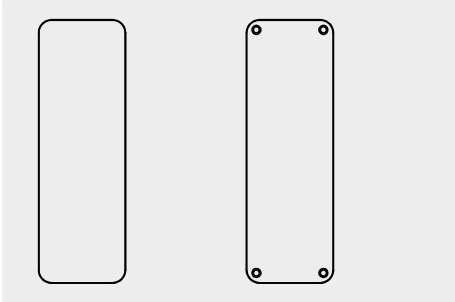


3010C5SS

3010V5SS

Pull Handles on Plate

3010 push plate with 150mm D-pull

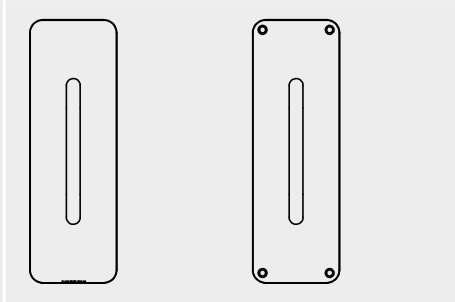


3010C-H15SS

3010V-H15SS

Pull Handles on Plate

3010 push plate with 200mm D-pull

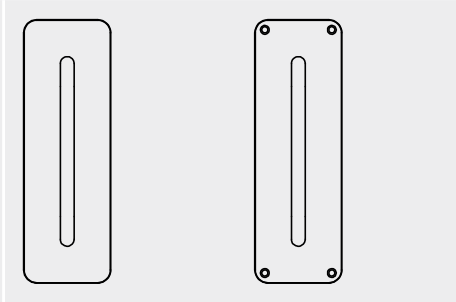


3010C-H20SS

3010V-H20SS

Push Plate with Oval Hole

3010 push plate

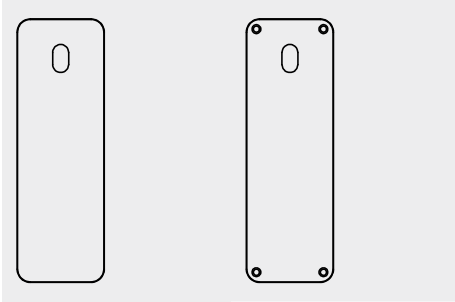


3010C/2SS

3010V/2SS

Pull Handles on Plate with Oval Hole

3010 push plate with 150mm D-pull

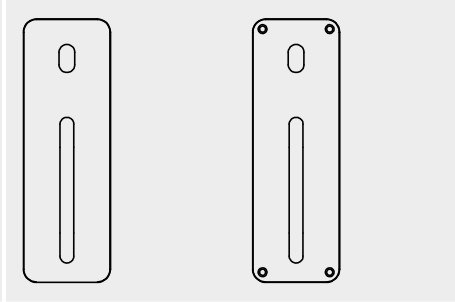


3010C-H15/2SS

3010V-H15/2SS

Push Plate with Round Hole

3010 push plate

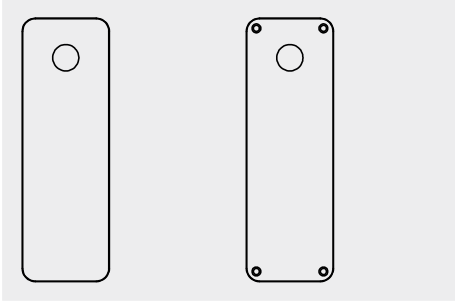


3010C/3SS

3010V/3SS

Pull Handles on Plate with Round Hole


3010 push plate with 150mm D-pull

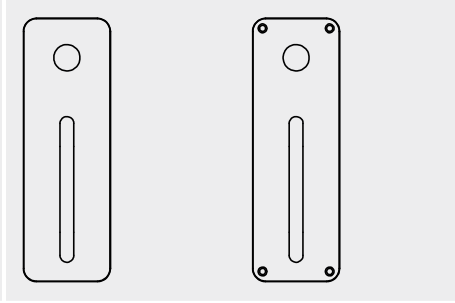


3010C-H15/3SS

3010V-H15/3SS

Dimensions

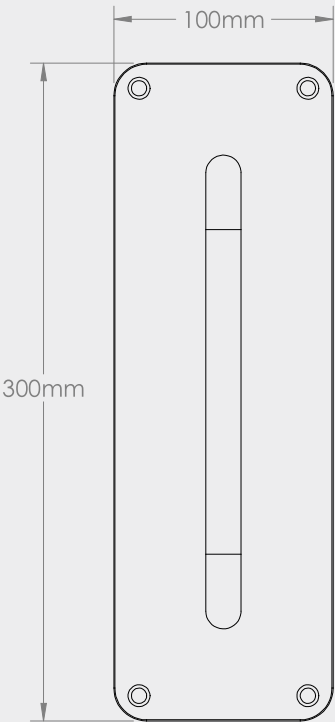

FRONT VIEW

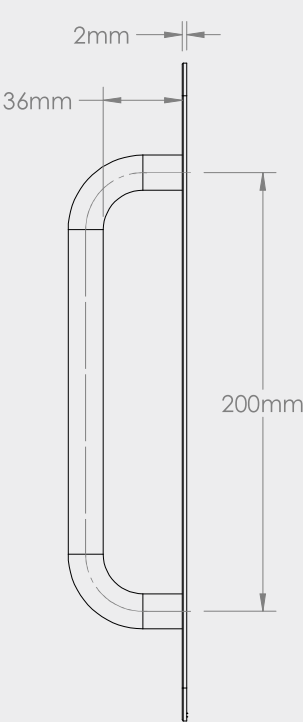

SIDE VIEW



REAR VIEW

D-Pull handles

316 grade stainless steel

dormakaba D-Pulls are constructed from 316 grade stainless steel.


The 16mm diameter handle is the perfect measurement for use on utility cupboards, commercial toilet door airlocks and many other applications.

Complying with AS1428.1 which requires hand clearance of between 35mm and 45mm.

D-Pulls are supplied with two M5 x 60mm fixing screws and are available in two lengths being 150mm and 200mm.




D-Pull
150mm h x 16mm dia

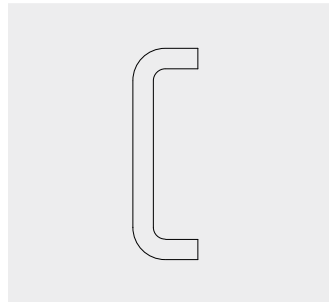

H15SSS

D-Pull
200mm h x 16mm dia




H20SSS

Screw Pack


M5 screws + threaded studs

The 35mm M5 screw, sold separately in the extended screw pack, suits 45mm to 60mm thick doors.


Standard 25mm M5 screws are included with all concealed fixed plates and suit 35mm to 45mm thick doors.



FRONT VIEW



SIDE VIEW



ISOMETRIC VIEW