



RP12



FITTING INSTRUCTIONS

Sliding Door Seal

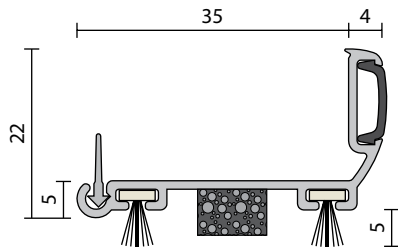

DETAILS

LOCATION

Heads and jambs of door frames.

MIN/MAX GAP

6mm to 8mm (prior to installation).


SEAL MATERIAL

Poplypropylene pile strip (black).

STANDARD FINISH

Anodised Satin Clear (Silver) or Bronze.

P.E. Paint (extra cost). Is a two pack polyester enamel colour match finish which is equal to or exceeds powdercoat finish.

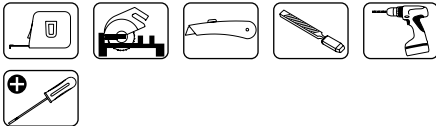

TOOLS

DESCRIPTION

The RP12 has a woven pile weather strip with unique Quiet-fins for noise protection. Ideal for sliding doors and designed to limit noise leakage and control dust and air movement. The RP12 is quick and easy to install to the door or frame.

INSTALLATION

NOTES

» The RP12 may be fitted to the door frame head and jambs or alternatively to the door (FIG.1). Corner joints should be mitred.

- STEP 1** Measure and mark required seal length.
- STEP 2** Machine cut RP12 to length.
- STEP 3** Slide RP12 into required position (FIG.2).
- STEP 4** Lightly screwfix in centre of slot (FIG.3).
- STEP 5** With door closed adjust door hang slider track so seal engages sealing face.
- STEP 6** Tighten screws and push in coverstrip. Neatly biff or centre punch aluminium to prevent woven pile and coverstrip from creeping.

FIG.2

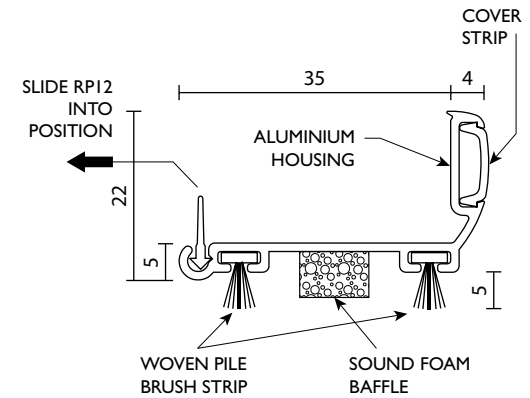


FIG.3


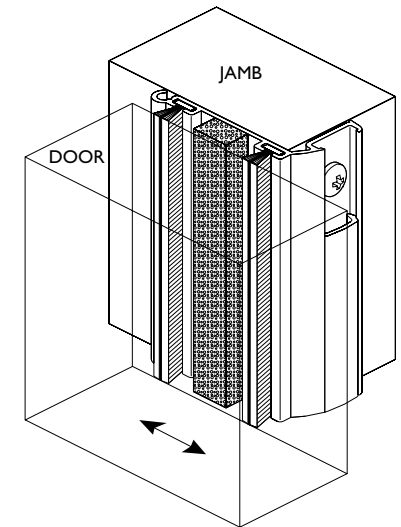


FIG.1

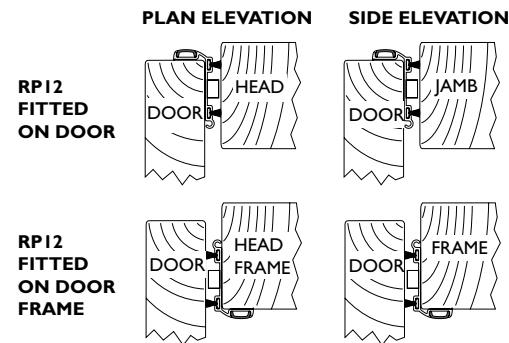

RAVEN PRODUCTS PTY. LTD.
18-22 Aldershot Rd,
Lonsdale SA 5160 Australia
T +61 8 8384 5455
raven.com.au

Raven Products is an
ISO9001 QMS company
certified by SGS

Designed and produced by
Raven Products Pty Ltd
(Australia)

Made in P.R.C. by Raven

Copyright: 06/24 (B)

Part No. ZSDSRP12